



flowPIM 1

1200 V / 35 A

Topology features

- Kelvin Emitter for improved switching performance
- Open Emitter configuration
- Temperature sensor
- Converter+Brake+Inverter

Component features

- Easy paralleling
- Low turn-off losses
- Low collector emitter saturation voltage
- Positive temperature coefficient
- Short tail current

Housing features

- Base isolation: AlN
- Convex shaped substrate for superior thermal contact
- Thermo-mechanical push-and-pull force relief
- Solder pin

Extra features

- with brake, improved Rth (AlN)


Target applications

- Industrial Drives
- Embedded Drives


Types

- V23990-P580-A46-PM

flow 1 17 mm housing



Schematic

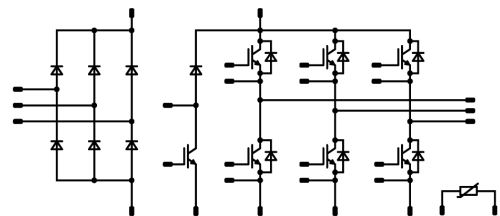



Vincotech

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

| Parameter | Symbol | Conditions | Value | Unit |
|-----------|--------|------------|-------|------|
|-----------|--------|------------|-------|------|

Inverter Switch

| | | | | |
|-----------------------------------|------------|--|----------|--------------------|
| Collector-emitter voltage | V_{CES} | | 1200 | V |
| Collector current (DC current) | I_C | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 49 | A |
| Repetitive peak collector current | I_{CRM} | t_p limited by T_{jmax} | 105 | A |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 152 | W |
| Gate-emitter voltage | V_{GES} | | ± 20 | V |
| Short circuit ratings | t_{SC} | $V_{GE} = 15\text{ V}$, $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$ | 10 | μs |
| Maximum junction temperature | T_{jmax} | | 175 | $^{\circ}\text{C}$ |

Inverter Diode

| | | | | |
|---------------------------------|------------|---------------------------------------|------|--------------------|
| Peak repetitive reverse voltage | V_{RRM} | | 1200 | V |
| Forward current (DC current) | I_F | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 54 | A |
| Repetitive peak forward current | I_{FRM} | t_p limited by T_{jmax} | 70 | A |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 121 | W |
| Maximum junction temperature | T_{jmax} | | 175 | $^{\circ}\text{C}$ |

Brake Switch

| | | | | |
|-----------------------------------|------------|--|----------|--------------------|
| Collector-emitter voltage | V_{CES} | | 1200 | V |
| Collector current (DC current) | I_C | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 40 | A |
| Repetitive peak collector current | I_{CRM} | t_p limited by T_{jmax} | 75 | A |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 133 | W |
| Gate-emitter voltage | V_{GES} | | ± 20 | V |
| Short circuit ratings | t_{SC} | $V_{GE} = 15\text{ V}$, $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$ | 10 | μs |
| Maximum junction temperature | T_{jmax} | | 175 | $^{\circ}\text{C}$ |



Vincotech

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

| Parameter | Symbol | Conditions | Value | Unit |
|---------------------------------|------------|--|-------------------|------|
| Brake Diode | | | | |
| Peak repetitive reverse voltage | V_{RRM} | | 1200 | V |
| Forward current (DC current) | I_F | $T_j = T_{jmax}$ $T_s \leq 80\text{ °C}$ | 20 ⁽¹⁾ | A |
| Repetitive peak forward current | I_{FRM} | t_p limited by T_{jmax} | 20 | A |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 59 | W |
| Maximum junction temperature | T_{jmax} | | 175 | °C |

⁽¹⁾ limited by I_{FRM}

Rectifier Diode

| | | | | |
|--|------------|--|------|-----|
| Peak repetitive reverse voltage | V_{RRM} | | 1600 | V |
| Forward current (DC current) | I_F | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 62 | A |
| Surge (non-repetitive) forward current | I_{FSM} | Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$ | 280 | A |
| Surge current capability | I^2t | | 390 | A²s |
| Total power dissipation | P_{tot} | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 82 | W |
| Maximum junction temperature | T_{jmax} | | 150 | °C |

Module Properties

Thermal Properties

| | | | | |
|---|-----------|--|----------------------------|----|
| Storage temperature | T_{stg} | | -40...+125 | °C |
| Operation temperature under switching condition | T_{jop} | | -40...+($T_{jmax} - 25$) | °C |

Isolation Properties

| | | | | |
|----------------------------|------------|-------------------------------------|-------|----|
| Isolation voltage | V_{isol} | DC Test Voltage* $t_p = 2\text{ s}$ | 6000 | V |
| Isolation voltage | V_{isol} | AC Voltage $t_p = 1\text{ min}$ | 2500 | V |
| Creepage distance | | | >12,7 | mm |
| Clearance | | | >12,7 | mm |
| Comparative Tracking Index | CTI | | ≥ 600 | |

*100 % tested in production



Vincotech

Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--------|-----|-----|------|
| | | | V_{GE} [V] V_{GS} [V] | V_{CE} [V] V_{DS} [V] V_F [V] | I_C [A] I_D [A] I_F [A] | T_j [°C] | Min | Typ | Max | |

Inverter Switch

Static

| | | | | | | | | | | |
|--------------------------------------|--------------|---------------------|-----|------|--------|-----------|------|-------------|---------------------|----|
| Gate-emitter threshold voltage | $V_{GE(th)}$ | $V_{CE} = V_{GE}$ | | | 0,0012 | 25 | 5,3 | 5,8 | 6,3 | V |
| Collector-emitter saturation voltage | V_{CEsat} | | 15 | | 35 | 25 150 | 1,58 | 1,95 2,4 | 2,07 ⁽²⁾ | V |
| Collector-emitter cut-off current | I_{CES} | | 0 | 1200 | | 25 | | | 5 | µA |
| Gate-emitter leakage current | I_{GES} | | 20 | 0 | | 25 | | | 120 | nA |
| Internal gate resistance | r_g | | | | | | | None | | Ω |
| Input capacitance | C_{ies} | $f = 1 \text{ Mhz}$ | 0 | 25 | | 25 | | 2000 | | pF |
| Reverse transfer capacitance | C_{res} | | | | | | | 70 | | pF |
| Gate charge | Q_g | | ±15 | | 0 | 25 | | 270 | | nC |

Thermal

| | | | | | | | | | | |
|--|---------------|--|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink ⁽³⁾ | $R_{th(j-s)}$ | $\lambda_{foil}=220 \text{ W/mK}$ (KU-ALF5) | | | | | | 0,62 | | K/W |
|--|---------------|--|--|--|--|--|--|------|--|-----|

Dynamic

| | | | | | | | | | | |
|-----------------------------|--------------|---|-----|-----|----|-----------|--|-----------------|--|-----|
| Turn-on delay time | $t_{d(on)}$ | $R_{gon} = 16 \text{ Ω}$ $R_{goff} = 16 \text{ Ω}$ | ±15 | 600 | 35 | 25 150 | | 92 91,6 | | ns |
| Rise time | t_r | | | | | 25 150 | | 18 23,4 | | ns |
| Turn-off delay time | $t_{d(off)}$ | | | | | 25 150 | | 212,6 273,8 | | ns |
| Fall time | t_f | | | | | 25 150 | | 75,33 104,91 | | ns |
| Turn-on energy (per pulse) | E_{on} | | | | | 25 150 | | 1,62 2,49 | | mWs |
| Turn-off energy (per pulse) | E_{off} | | | | | 25 150 | | 1,81 2,82 | | mWs |



Vincotech

Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--------|-----|-----|------|
| | | | V_{GE} [V] V_{GS} [V] | V_{CE} [V] V_{DS} [V] V_F [V] | I_C [A] I_D [A] I_F [A] | T_j [°C] | Min | Typ | Max | |

Inverter Diode

Static

| | | | | | | | | | | |
|-------------------------|-------|----------------|--|--|----|-----------|------|-------------|---------------------|----|
| Forward voltage | V_F | | | | 35 | 25 150 | 1,35 | 1,83 1,8 | 2,05 ⁽²⁾ | V |
| Reverse leakage current | I_R | $V_r = 1200$ V | | | | 25 | | | 7,7 | μA |

Thermal

| | | | | | | | | | | |
|--|---------------|--|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink ⁽³⁾ | $R_{th(j-s)}$ | $\lambda_{foil}=220$ W/mK (KU-ALF5) | | | | | | 0,78 | | K/W |
|--|---------------|--|--|--|--|--|--|------|--|-----|

Dynamic

| | | | | | | | | | | |
|---------------------------------------|----------------------|--|----------|-----|----|-----------|--|-----------------|--|------|
| Peak recovery current | I_{RM} | $di/dt=2744$ A/μs $di/dt=2239$ A/μs | ± 15 | 600 | 35 | 25 150 | | 68,91 78,7 | | A |
| Reverse recovery time | t_{rr} | | | | | 25 150 | | 150,18 277,1 | | ns |
| Recovered charge | Q_r | | | | | 25 150 | | 3,93 7,47 | | μC |
| Reverse recovered energy | E_{rec} | | | | | 25 150 | | 1,69 3,31 | | mWs |
| Peak rate of fall of recovery current | $(di_{rr}/dt)_{max}$ | | | | | 25 150 | | 4100 2080 | | A/μs |



Vincotech

Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--------|-----|-----|------|
| | | | V_{GE} [V] V_{GS} [V] | V_{CE} [V] V_{DS} [V] V_F [V] | I_C [A] I_D [A] I_F [A] | T_j [°C] | Min | Typ | Max | |

Brake Switch

Static

| | | | | | | | | | | |
|--------------------------------------|--------------|---------------------|-----|------|---------|-----------|------|--------------|---------------------|----|
| Gate-emitter threshold voltage | $V_{GE(th)}$ | $V_{CE} = V_{GE}$ | | | 0,00085 | 25 | 5,3 | 5,8 | 6,3 | V |
| Collector-emitter saturation voltage | V_{CEsat} | | 15 | | 25 | 25 150 | 1,58 | 1,87 2,31 | 2,07 ⁽²⁾ | V |
| Collector-emitter cut-off current | I_{CES} | | 0 | 1200 | | 25 | | | 2,4 | µA |
| Gate-emitter leakage current | I_{GES} | | 20 | 0 | | 25 | | | 120 | nA |
| Internal gate resistance | r_g | | | | | | | None | | Ω |
| Input capacitance | C_{ies} | $f = 1 \text{ Mhz}$ | 0 | 25 | | 25 | | 1450 | | pF |
| Reverse transfer capacitance | C_{res} | | | | | | | 50 | | pF |
| Gate charge | Q_g | | ±15 | | 0 | 25 | | 200 | | nC |

Thermal

| | | | | | | | | | | |
|--|---------------|--|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink ⁽³⁾ | $R_{th(j-s)}$ | $\lambda_{foil}=220 \text{ W/mK}$ (KU-ALF5) | | | | | | 0,71 | | K/W |
|--|---------------|--|--|--|--|--|--|------|--|-----|

Dynamic

| | | | | | | | | | | |
|-----------------------------|--------------|---|-----|-----|----|-----------|--|-----------------|--|-----|
| Turn-on delay time | $t_{d(on)}$ | $R_{gon} = 32 \text{ Ω}$ $R_{goff} = 32 \text{ Ω}$ | ±15 | 600 | 25 | 25 150 | | 126,6 128,8 | | ns |
| Rise time | t_r | | | | | 25 150 | | 36 41,8 | | ns |
| Turn-off delay time | $t_{d(off)}$ | | | | | 25 150 | | 232 275,6 | | ns |
| Fall time | t_f | | | | | 25 150 | | 73,75 111,69 | | ns |
| Turn-on energy (per pulse) | E_{on} | | | | | 25 150 | | 1,81 2,42 | | mWs |
| Turn-off energy (per pulse) | E_{off} | | | | | 25 150 | | 1,37 2,19 | | mWs |



Vincotech

V23990-P580-A46-PM
datasheet

Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--------|-----|-----|------|
| | | | V_{GE} [V] V_{GS} [V] | V_{CE} [V] V_{DS} [V] V_F [V] | I_C [A] I_D [A] I_F [A] | T_j [°C] | Min | Typ | Max | |

Brake Diode

Static

| | | | | | | | | | | |
|-------------------------|-------|----------------|--|--|----|-----------|------|--------------|---------------------|----|
| Forward voltage | V_F | | | | 10 | 25 150 | 1,35 | 1,85 1,77 | 2,05 ⁽²⁾ | V |
| Reverse leakage current | I_R | $V_r = 1200$ V | | | | 25 | | | 2,7 | μA |

Thermal

| | | | | | | | | | | |
|--|---------------|--|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink ⁽³⁾ | $R_{th(j-s)}$ | $\lambda_{foil}=220$ W/mK (KU-ALF5) | | | | | | 1,62 | | K/W |
|--|---------------|--|--|--|--|--|--|------|--|-----|

Dynamic

| | | | | | | | | | | |
|---------------------------------------|----------------------|--------------------------------------|----------|-----|----|-----------|--|-----------------|--|------|
| Peak recovery current | I_{RM} | $di/dt=570$ A/μs $di/dt=504$ A/μs | ± 15 | 600 | 25 | 25 150 | | 10,17 12,29 | | A |
| Reverse recovery time | t_{rr} | | | | | 25 150 | | 396,24 624,1 | | ns |
| Recovered charge | Q_r | | | | | 25 150 | | 1,55 3,03 | | μC |
| Reverse recovered energy | E_{rec} | | | | | 25 150 | | 0,631 1,3 | | mWs |
| Peak rate of fall of recovery current | $(di_{rr}/dt)_{max}$ | | | | | 25 150 | | 35,97 31,78 | | A/μs |



Vincotech

Characteristic Values

| Parameter | Symbol | Conditions | | | | | Values | | | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--------|-----|-----|------|
| | | | V_{GE} [V] V_{GS} [V] | V_{CE} [V] V_{DS} [V] V_F [V] | I_C [A] I_D [A] I_F [A] | T_j [°C] | Min | Typ | Max | |

Rectifier Diode

Static

| | | | | | | | | | | |
|-------------------------|-------|----------------|--|--|----|-----------|--|--------------|---|----|
| Forward voltage | V_F | | | | 50 | 25 125 | | 1,29 1,25 | 1,3 ⁽²⁾ 1,33 ⁽²⁾ | V |
| Reverse leakage current | I_R | $V_r = 1600$ V | | | | 25 150 | | | 20 1500 | μA |

Thermal

| | | | | | | | | | | |
|--|---------------|--|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink ⁽³⁾ | $R_{th(j-s)}$ | $\lambda_{foil}=220$ W/mK (KU-ALF5) | | | | | | 0,85 | | K/W |
|--|---------------|--|--|--|--|--|--|------|--|-----|

Thermistor

Static

| | | | | | | | | | | |
|--------------------------------|----------------|--------------------|--|--|--|-----|-----|------|----|------|
| Rated resistance | R | | | | | 25 | | 22 | | kΩ |
| Deviation of R25 | $\Delta_{R/R}$ | $R_{25} = 22$ kΩ | | | | 25 | -5 | | 5 | % |
| Deviation of R100 | | $R_{100} = 1486$ Ω | | | | 100 | -12 | | 14 | |
| Power dissipation | P | | | | | | | 200 | | mW |
| Power dissipation constant | d | | | | | 25 | | 2 | | mW/K |
| B-value | $B_{(25/50)}$ | Tol. ±3 % | | | | | | 3950 | | K |
| B-value | $B_{(25/100)}$ | Tol. ±3 % | | | | | | 3998 | | K |
| Vincotech Thermistor Reference | | | | | | | | | B | |

⁽²⁾ Value at chip level

⁽³⁾ Only valid with pre-applied Vincotech thermal interface material.



Vincotech


V23990-P580-A46-PM
datasheet

Inverter Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

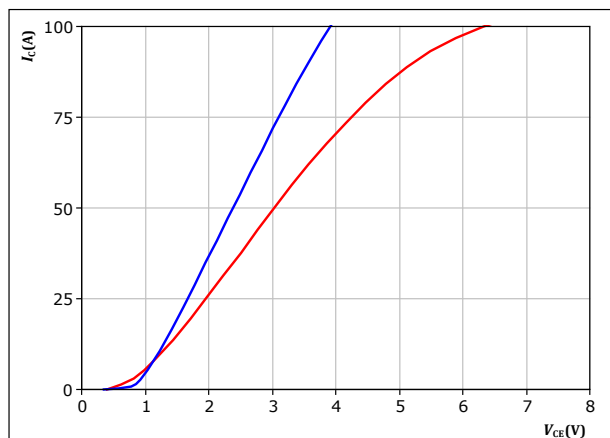


$t_p = 250 \mu s$
 $V_{GE} = 15 V$
 $T_J: 25 ^\circ C$ (blue line)
 $150 ^\circ C$ (red line)

figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

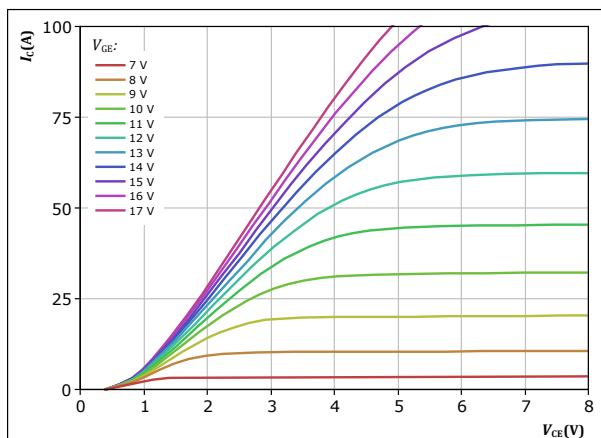


$t_p = 250 \mu s$
 $T_J = 150 ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

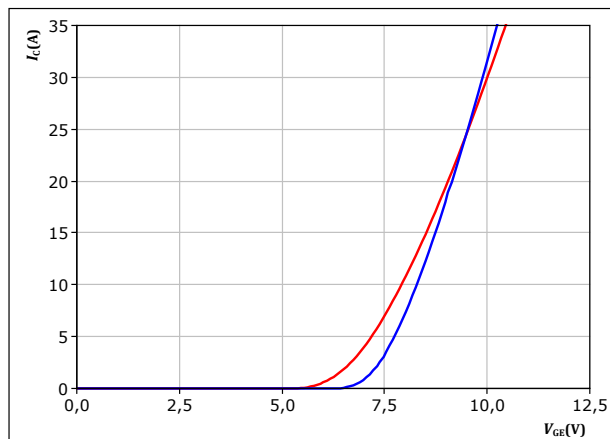


$t_p = 250 \mu s$
 $V_{CE} = 10 V$
 $T_J: 25 ^\circ C$ (blue line)
 $150 ^\circ C$ (red line)

figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

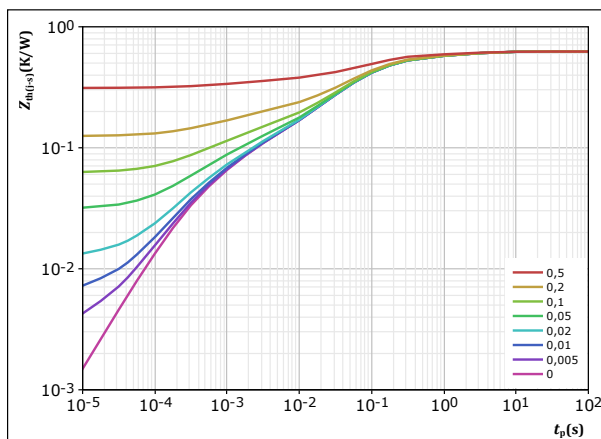

$D = t_p / T$
 $R_{th(j-s)} = 0,624 K/W$
IGBT thermal model values

| $R (K/W)$ | $\tau (s)$ |
|-----------|------------|
| 4,36E-02 | 3,59E+00 |
| 8,73E-02 | 5,79E-01 |
| 3,10E-01 | 8,12E-02 |
| 9,42E-02 | 1,66E-02 |
| 5,96E-02 | 1,60E-03 |
| 2,95E-02 | 2,82E-04 |



Vincotech


V23990-P580-A46-PM
datasheet

Inverter Switch Characteristics

figure 5. IGBT

Safe operating area

$$I_C = f(V_{CE})$$

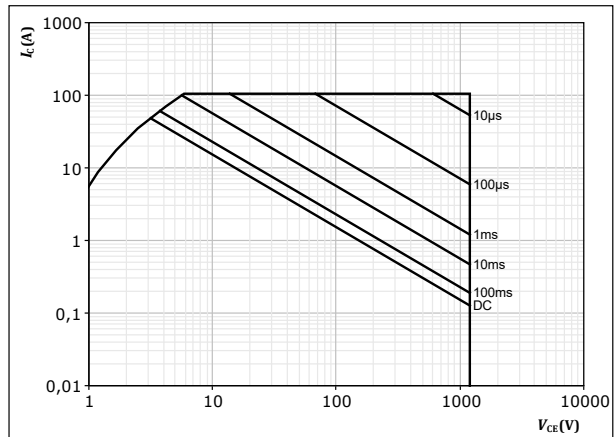

$D =$ single pulse

$T_s = 80$ °C

$V_{GE} = 15$ V

$T_j = T_{jmax}$



Vincotech

V23990-P580-A46-PM
datasheet

Inverter Diode Characteristics

figure 6. FWD

Typical forward characteristics

$$I_F = f(V_F)$$


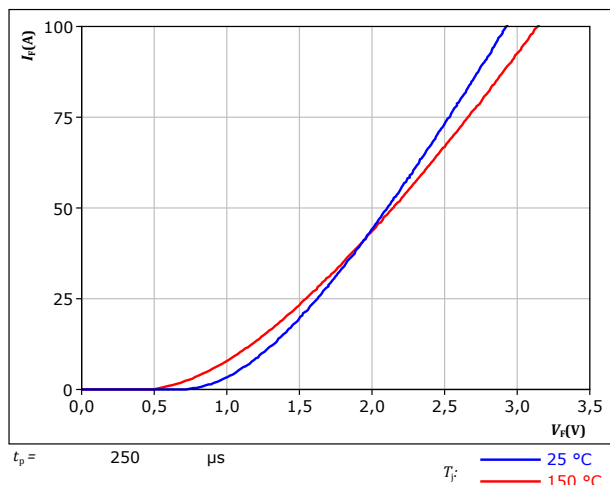


figure 7. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

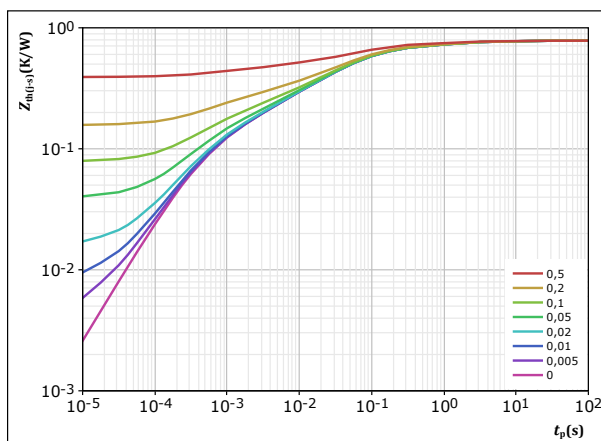

| | | |
|--------------------------|------------|-----|
| $D =$ | t_p / T | |
| $R_{th(j-s)} =$ | 0,783 | K/W |
| FWD thermal model values | | |
| R (K/W) | τ (s) | |
| 2,40E-02 | 9,68E+00 | |
| 9,20E-02 | 9,76E-01 | |
| 2,42E-01 | 9,98E-02 | |
| 2,24E-01 | 2,45E-02 | |
| 1,14E-01 | 2,85E-03 | |
| 8,67E-02 | 4,13E-04 | |



Vincotech


V23990-P580-A46-PM
datasheet

Brake Switch Characteristics

figure 8. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

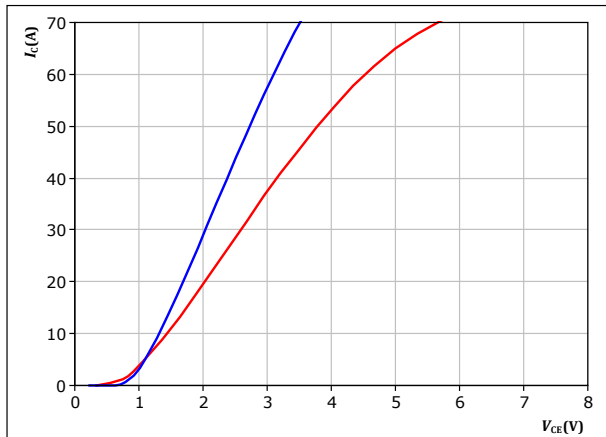


$t_p = 250 \mu s$
 $V_{GE} = 15 V$
 $T_J: 25 ^\circ C$
 $150 ^\circ C$

figure 9. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

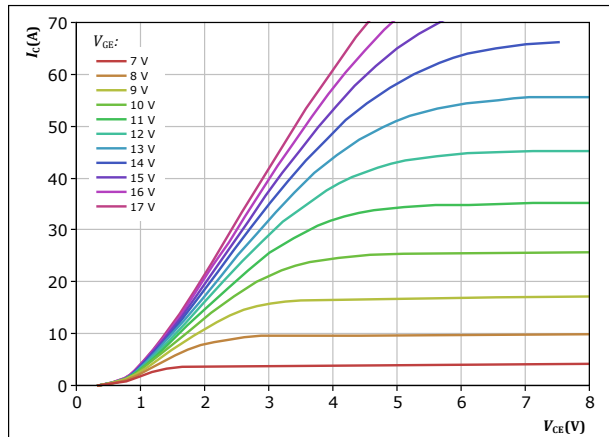


$t_p = 250 \mu s$
 $T_J = 150 ^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 10. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

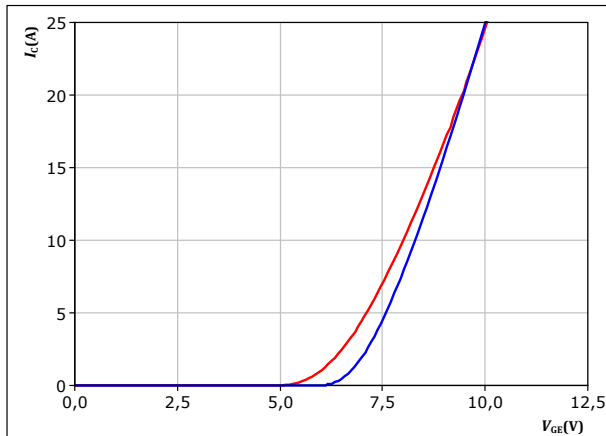


$t_p = 250 \mu s$
 $V_{CE} = 10 V$
 $T_J: 25 ^\circ C$
 $150 ^\circ C$

figure 11. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

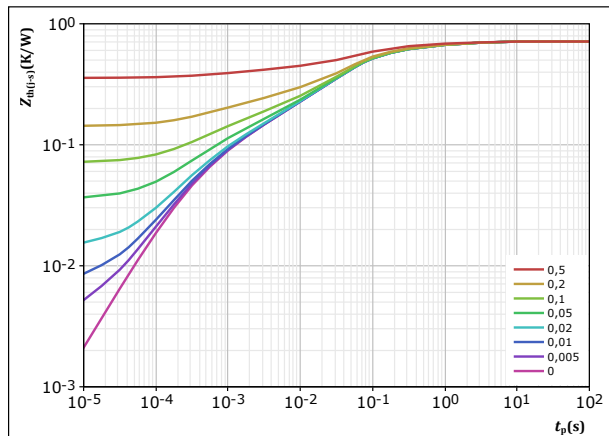

$D = t_p / T$
 $R_{th(j-s)} = 0,714 K/W$
IGBT thermal model values

| $R (K/W)$ | $\tau (s)$ |
|-----------|------------|
| 6,54E-02 | 2,13E+00 |
| 1,26E-01 | 2,68E-01 |
| 3,44E-01 | 5,06E-02 |
| 8,57E-02 | 6,35E-03 |
| 6,46E-02 | 9,56E-04 |
| 2,86E-02 | 2,29E-04 |



Vincotech

V23990-P580-A46-PM
datasheet


Brake Switch Characteristics

figure 12.

IGBT

Safe operating area

$$I_C = f(V_{CE})$$

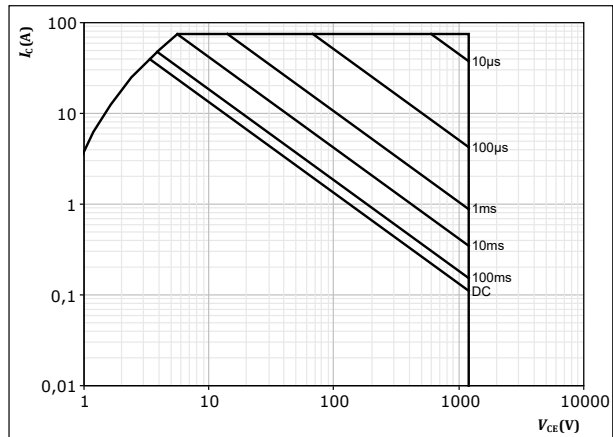

D = single pulse

T_s = 80 °C

V_{GE} = 15 V

T_j = T_{jmax}



Brake Diode Characteristics

figure 13.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$


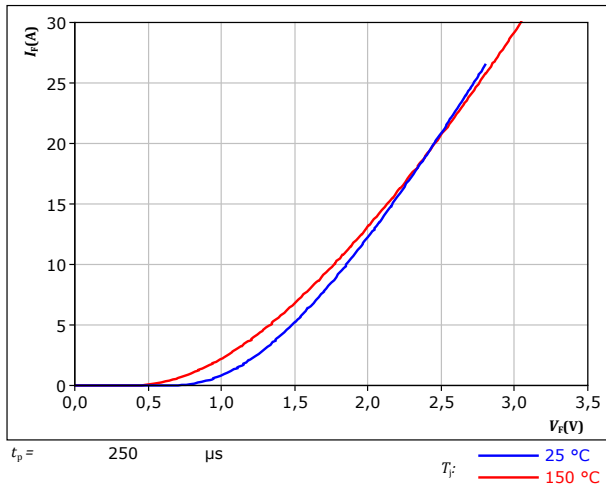


figure 14.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

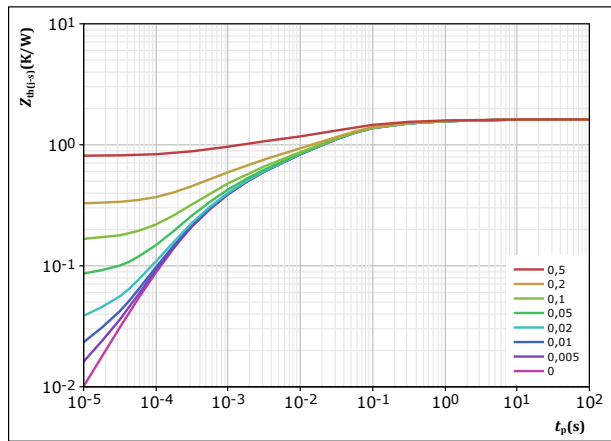

| | | |
|--------------------------|------------|-----|
| $D =$ | t_p / T | |
| $R_{th(j-s)} =$ | 1,621 | K/W |
| FWD thermal model values | | |
| R (K/W) | τ (s) | |
| 6,04E-02 | 3,76E+00 | |
| 1,66E-01 | 3,15E-01 | |
| 5,83E-01 | 4,57E-02 | |
| 3,65E-01 | 7,42E-03 | |
| 3,02E-01 | 1,03E-03 | |
| 1,45E-01 | 2,16E-04 | |



Rectifier Diode Characteristics

figure 15.

Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$


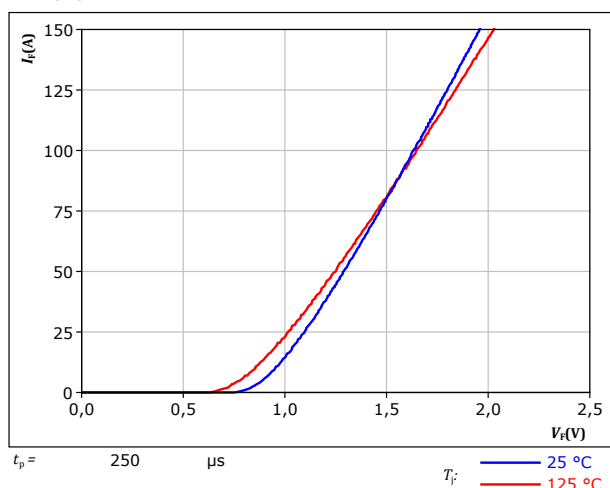


figure 16.

Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

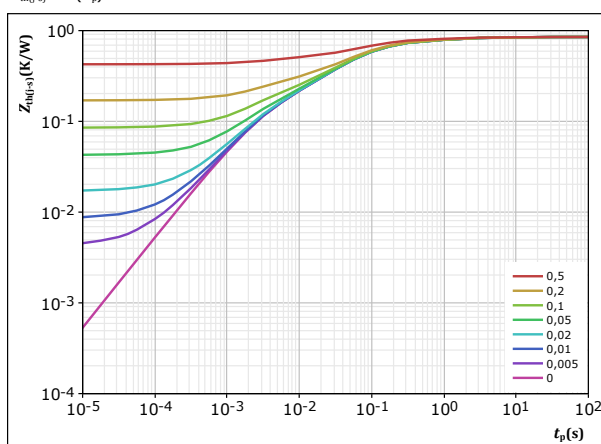

| | | |
|--------------------------------|------------|-----|
| $D =$ | t_p / T | |
| $R_{th(j-s)} =$ | 0,851 | K/W |
| Rectifier thermal model values | | |
| R (K/W) | τ (s) | |
| 2,48E-02 | 9,86E+00 | |
| 1,03E-01 | 9,64E-01 | |
| 3,29E-01 | 1,14E-01 | |
| 2,76E-01 | 3,21E-02 | |
| 1,18E-01 | 2,84E-03 | |




Thermistor Characteristics

figure 17. Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

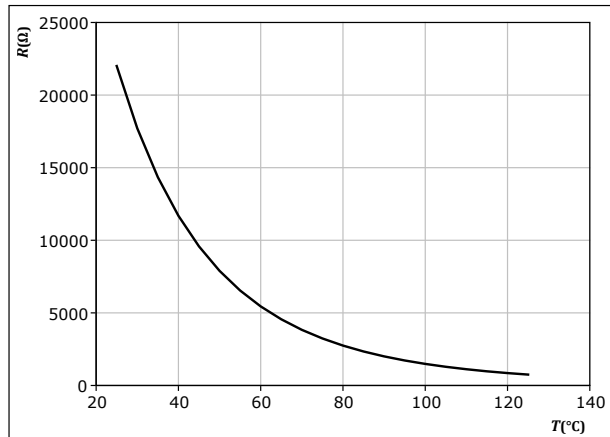



Vincotech

V23990-P580-A46-PM
datasheet


Inverter Switching Characteristics

figure 18.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_c)$$

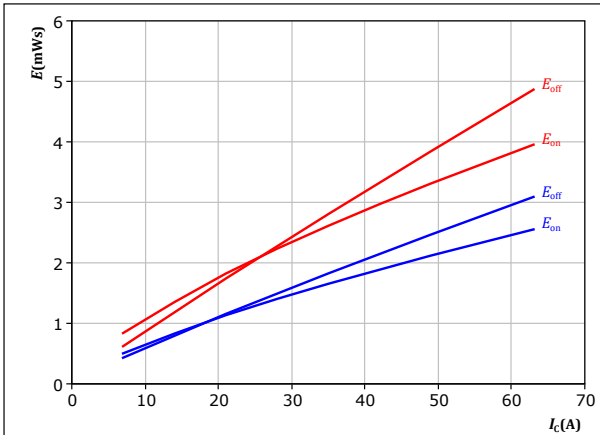

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω
 $R_{goff} = 16$ Ω


T_j : — 25 °C
— 150 °C

figure 19.

IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor

$$E = f(R_g)$$

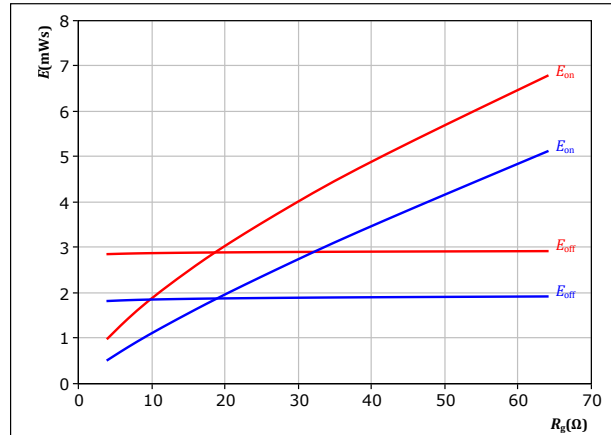

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 35$ A


T_j : — 25 °C
— 150 °C

figure 20.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_c)$$

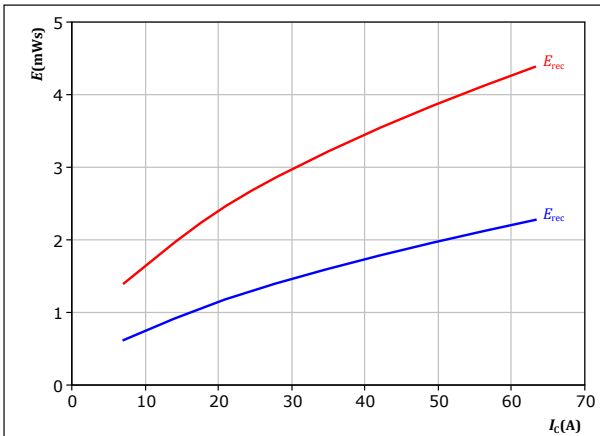

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω


T_j : — 25 °C
— 150 °C

figure 21.

FWD

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor

$$E_{rec} = f(R_g)$$

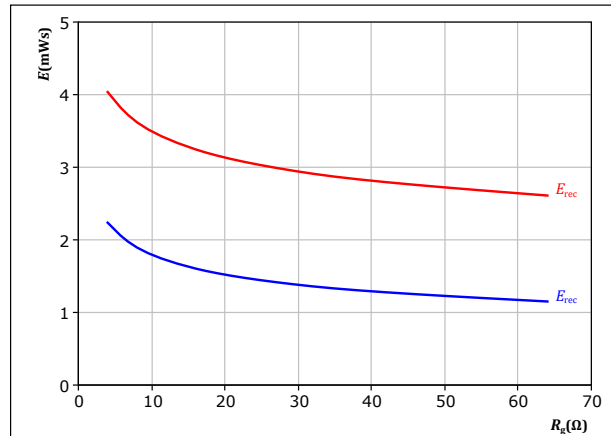

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 35$ A

T_j : — 25 °C
— 150 °C



Vincotech


V23990-P580-A46-PM
datasheet

Inverter Switching Characteristics

figure 22.

IGBT

Typical switching times as a function of collector current
 $t = f(I_C)$

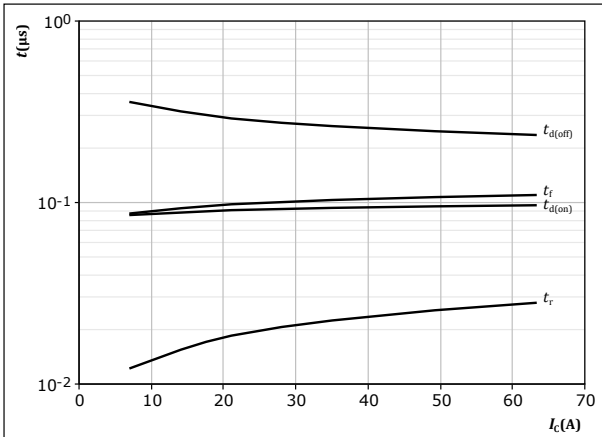


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω
 $R_{goff} = 16$ Ω

figure 23.

IGBT

Typical switching times as a function of IGBT turn on gate resistor
 $t = f(R_g)$

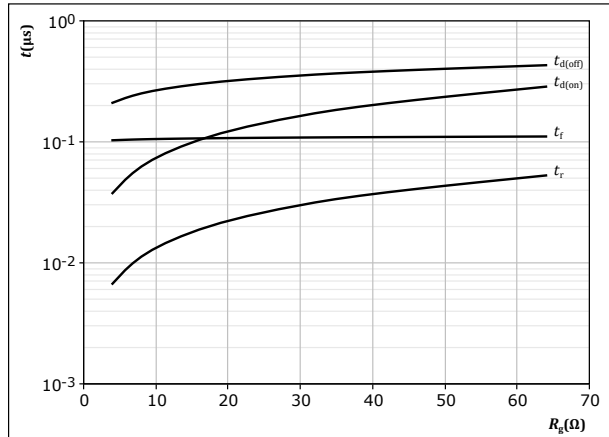


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 35$ A

figure 24.

FWD

Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_C)$

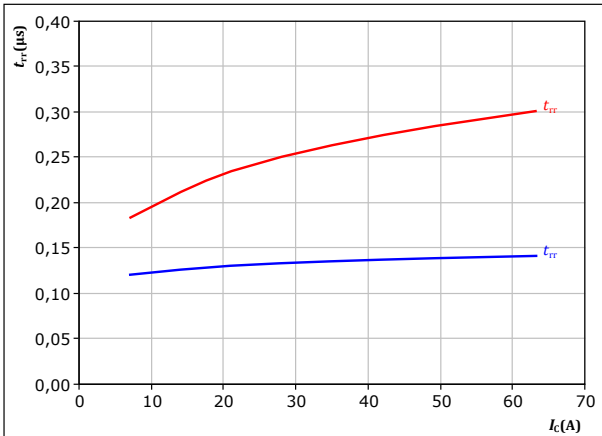

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω

T_j : — 25 °C
— 150 °C

figure 25.

FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor
 $t_{rr} = f(R_{gon})$

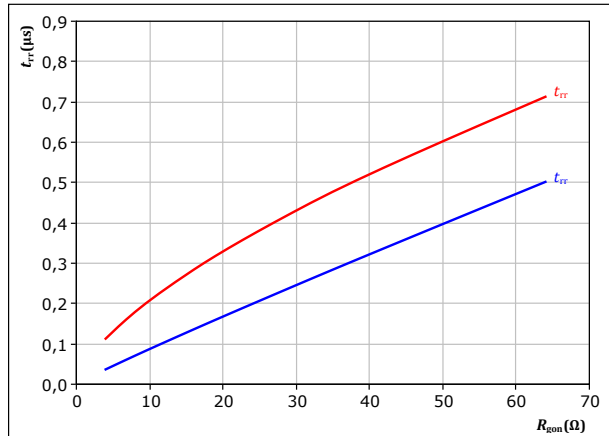

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 35$ A

T_j : — 25 °C
— 150 °C



Vincotech

V23990-P580-A46-PM
datasheet


Inverter Switching Characteristics

figure 26.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

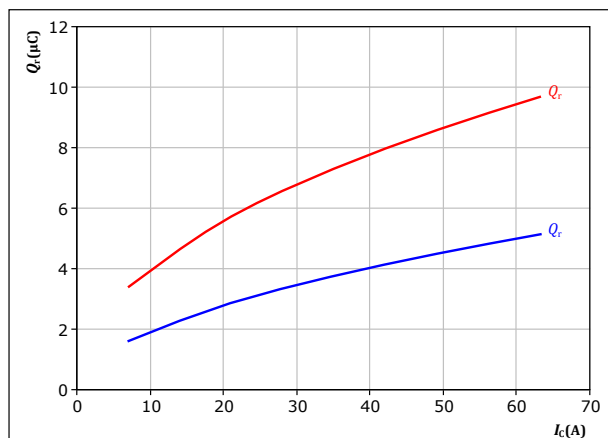

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω


T_j : — 25 °C
— 150 °C

figure 28.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

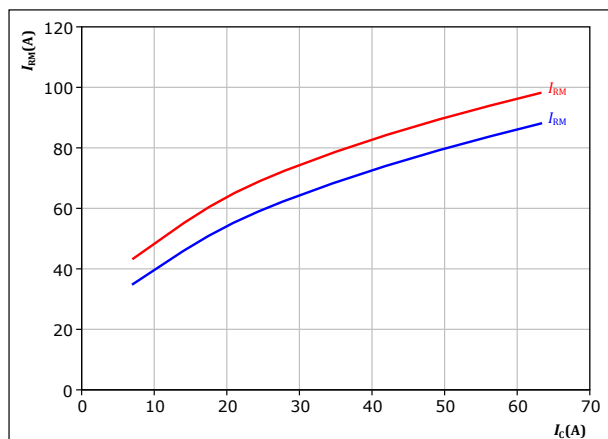

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 16$ Ω


T_j : — 25 °C
— 150 °C

figure 27.

FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

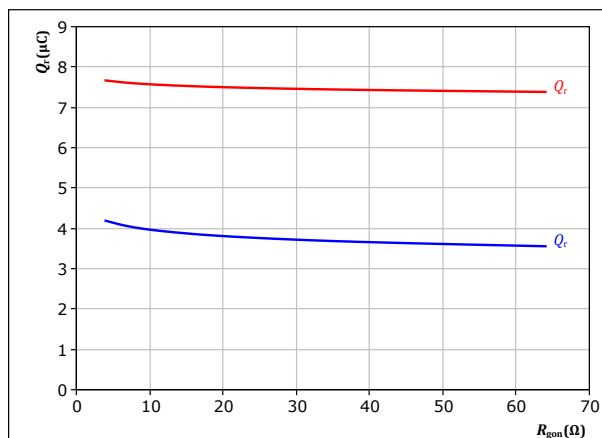

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 35$ A


T_j : — 25 °C
— 150 °C

figure 29.

FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

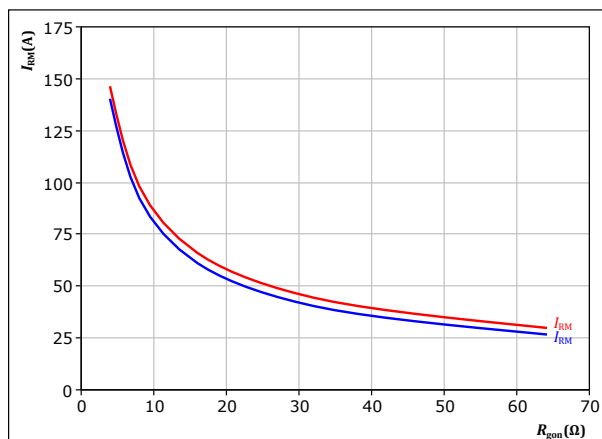

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 35$ A

T_j : — 25 °C
— 150 °C




Vincotech

V23990-P580-A46-PM
datasheet

Inverter Switching Characteristics

figure 30. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

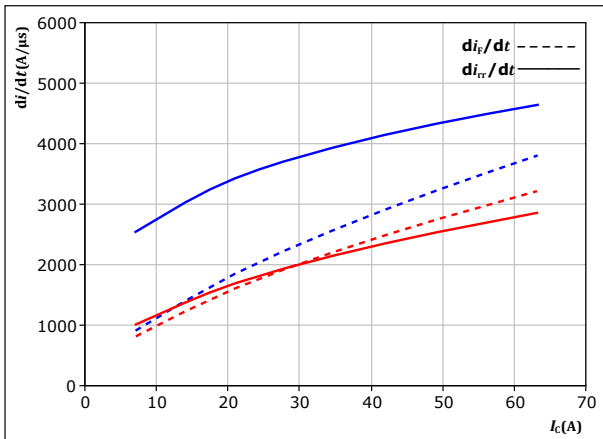

With an inductive load at


$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{gon} = 16 \text{ } \Omega$

T_j : — 25 °C
— 150 °C

figure 32. IGBT

Reverse bias safe operating area


$I_C = f(V_{CE})$

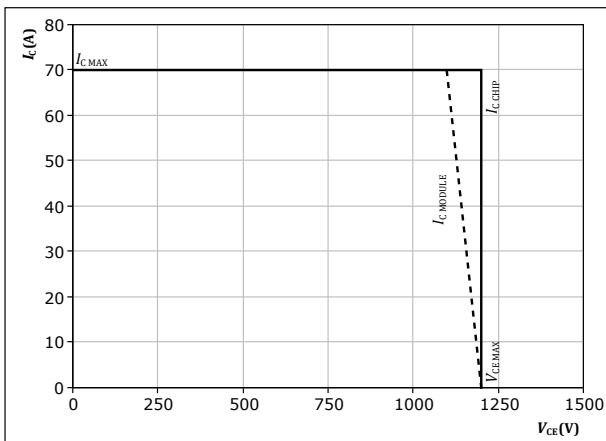

At $T_j = 150 \text{ } ^\circ\text{C}$
 $R_{gon} = 16 \text{ } \Omega$
 $R_{goff} = 16 \text{ } \Omega$

figure 31. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor
 $di_f/dt, di_r/dt = f(R_{gon})$

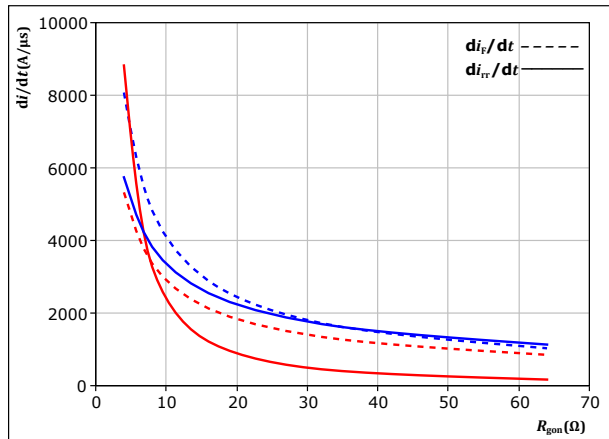

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_C = 35 \text{ A}$

T_j : — 25 °C
— 150 °C



Vincotech

V23990-P580-A46-PM
datasheet


Brake Switching Characteristics

figure 33.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

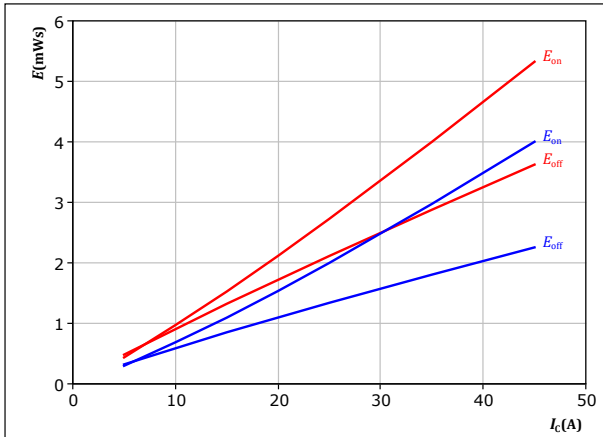

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω
 $R_{goff} = 32$ Ω


T_j : — 25 °C
— 150 °C

figure 34.

IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor

$$E = f(R_g)$$

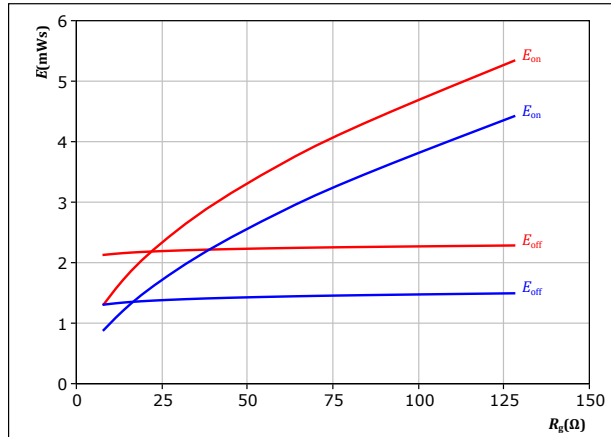

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 25$ A


T_j : — 25 °C
— 150 °C

figure 35.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

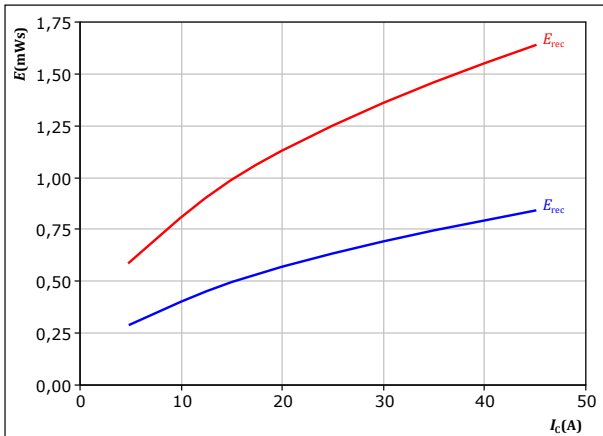

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω


T_j : — 25 °C
— 150 °C

figure 36.

FWD

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor

$$E_{rec} = f(R_g)$$

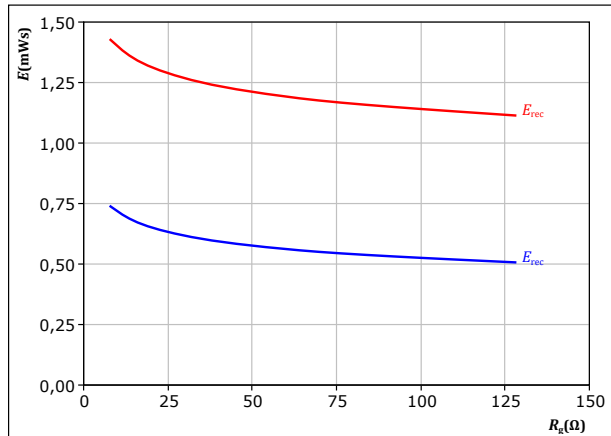

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 25$ A

T_j : — 25 °C
— 150 °C




Brake Switching Characteristics

figure 37.

IGBT

Typical switching times as a function of collector current
 $t = f(I_C)$

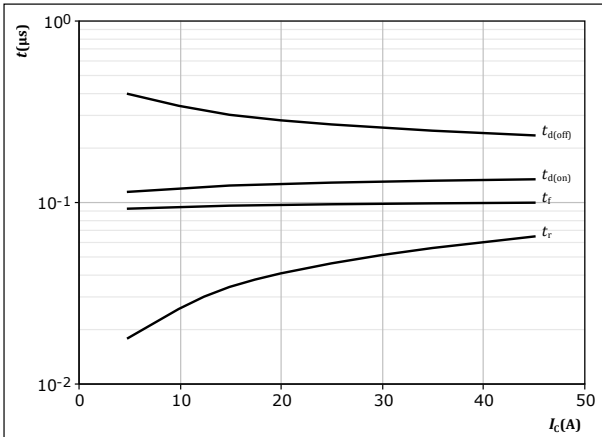


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω
 $R_{goff} = 32$ Ω

figure 38.

IGBT

Typical switching times as a function of IGBT turn on gate resistor
 $t = f(R_g)$

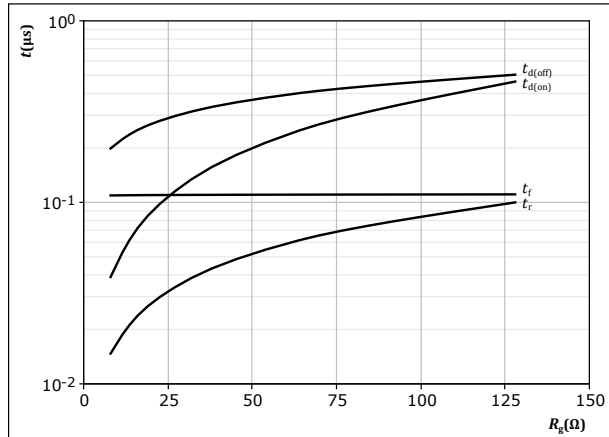


With an inductive load at

$T_j = 150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 25$ A

figure 39.

FWD

Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_C)$

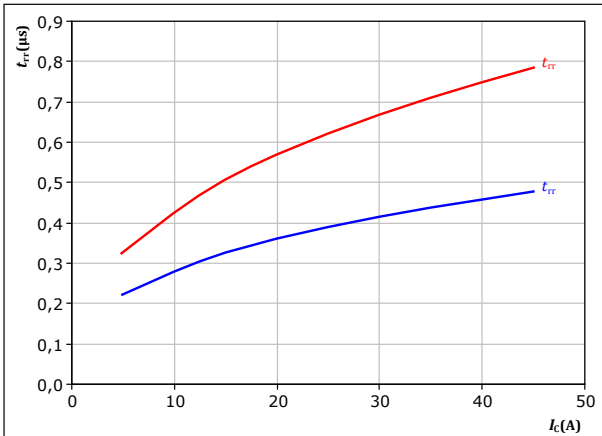

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω

T_j : — 25 °C
— 150 °C

figure 40.

FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor
 $t_{rr} = f(R_{gon})$

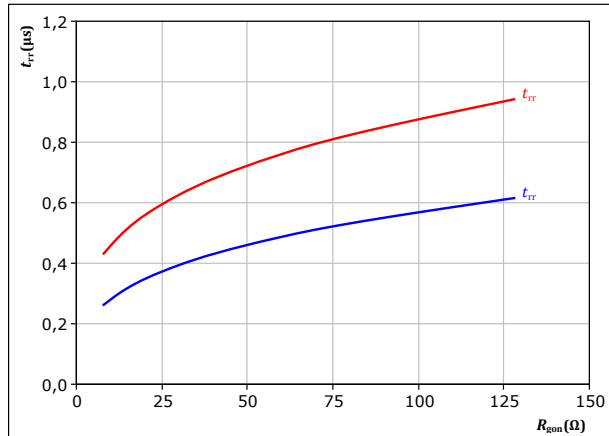

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 25$ A

T_j : — 25 °C
— 150 °C




Brake Switching Characteristics

figure 41.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

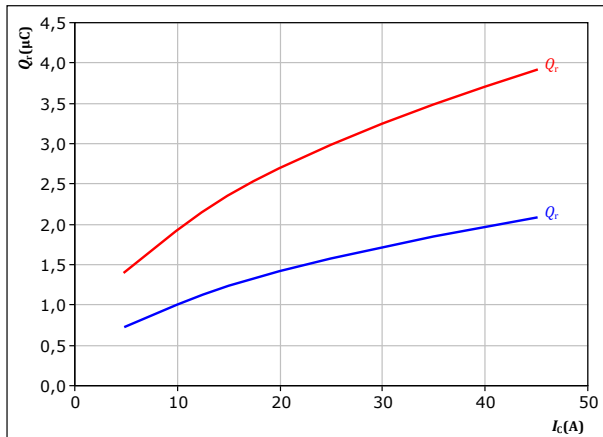

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω


T_j : — 25 °C
— 150 °C

figure 42.

FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

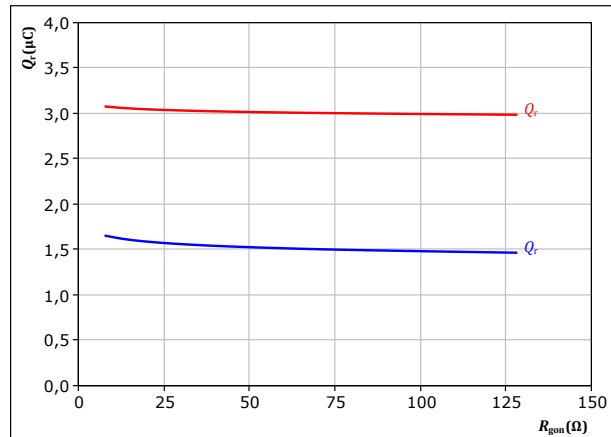

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 25$ A


T_j : — 25 °C
— 150 °C

figure 43.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

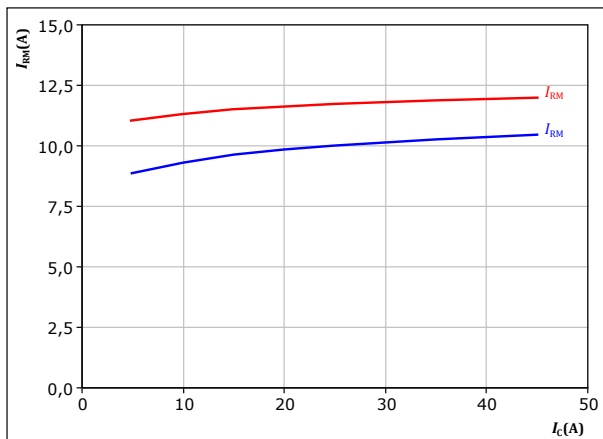

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω


T_j : — 25 °C
— 150 °C

figure 44.

FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

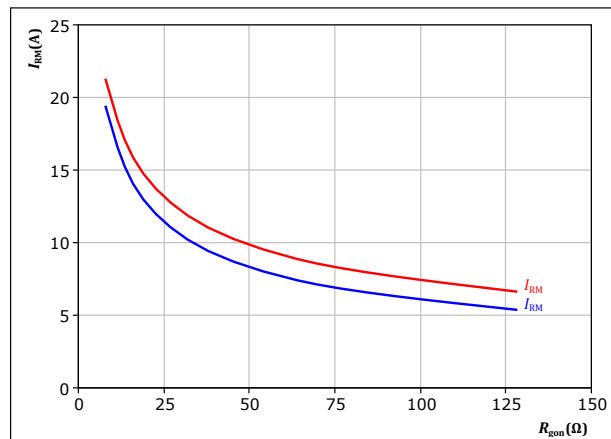

With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 25$ A

T_j : — 25 °C
— 150 °C




Vincotech

V23990-P580-A46-PM
datasheet

Brake Switching Characteristics

figure 45. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_r/dt = f(I_C)$

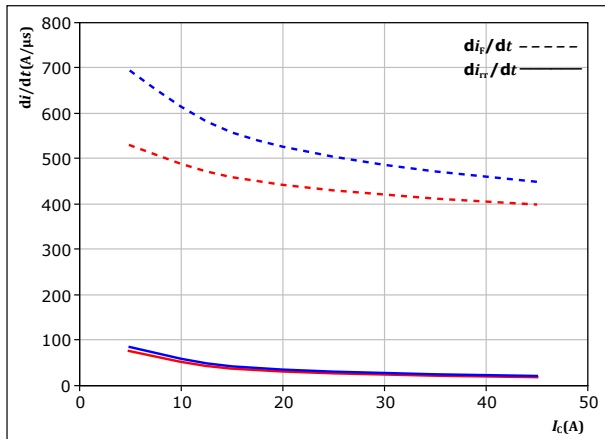


With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 32$ Ω

T_j : — 25 °C
— 150 °C

figure 46. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor
 $di_f/dt, di_r/dt = f(R_{gon})$

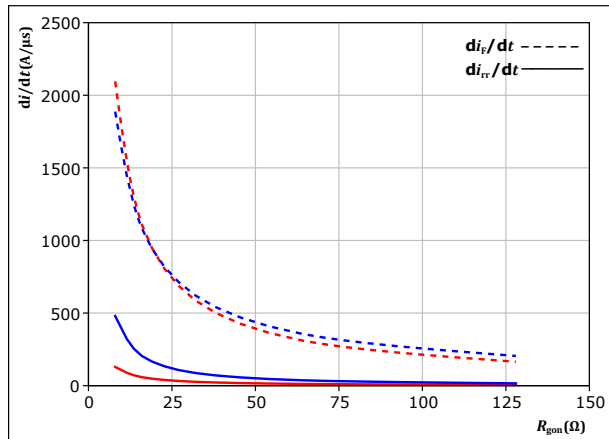

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 25$ A

T_j : — 25 °C
— 150 °C

figure 47. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

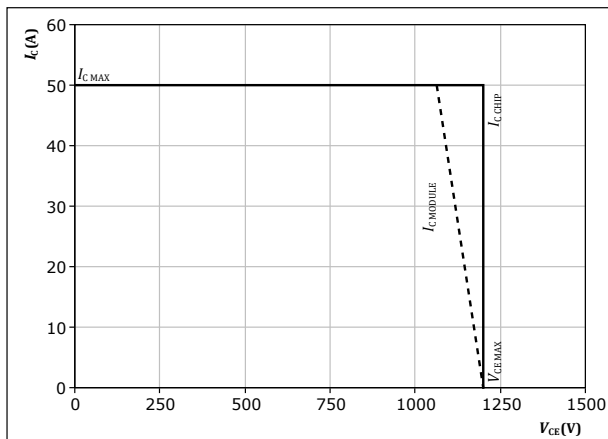

At $T_j = 150$ °C
 $R_{gon} = 32$ Ω
 $R_{goff} = 32$ Ω



Switching Definitions

figure 48. IGBT

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})



figure 49. IGBT

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})




figure 50. IGBT

Turn-off Switching Waveforms & definition of t_f



figure 51. IGBT

Turn-on Switching Waveforms & definition of t_r

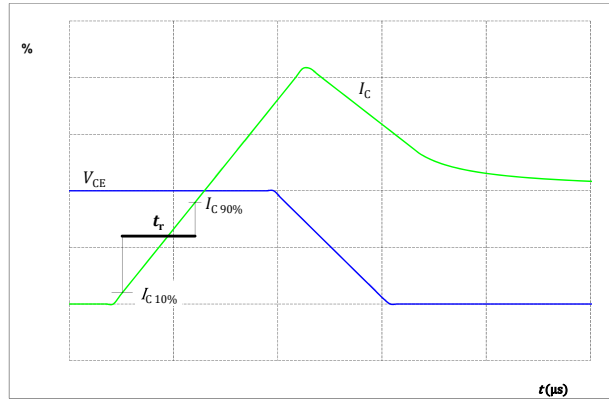



Switching Definitions

figure 52.

FWD

Turn-off Switching Waveforms & definition of t_{rr}



figure 53.

FWD

Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)






Vincotech

V23990-P580-A46-PM

datasheet

| Ordering Code | |
|-----------------------|--------------------|
| Version | Ordering Code |
| Without thermal paste | V23990-P580-A46-PM |

| Marking | | | | | | | |
|---|------------|----------|------------|----------|-----------|------|--------|
|  | Text | VIN | Date code | Type&Ver | UL | Lot | Serial |
| | | VIN | WWYY | TTTTTTTV | UL | LLLL | SSSS |
| | Datamatrix | Type&Ver | Lot number | Serial | Date code | | |
| | | TTTTTTTV | LLLLL | SSSS | WWYY | | |

Outline

Pin table [mm]


| Pin | X | Y | Function |
|-----|-------|------|----------|
| 1 | 52,55 | 0 | BrG |
| 2 | 47,7 | 0 | DC- |
| 3 | 44,8 | 0 | DC- |
| 4 | 37,8 | 0 | DC+ |
| 5 | 37,8 | 2,8 | DC+ |
| 6 | 35 | 0 | Inv+ |
| 7 | 35 | 2,8 | Inv+ |
| 8 | 28 | 0 | R1 |
| 9 | 25,2 | 0 | R2 |
| 10 | 22,4 | 0 | N6 |
| 11 | 19,6 | 0 | G6 |
| 12 | 16,8 | 0 | S6 |
| 13 | 14 | 0 | N4 |
| 14 | 11,2 | 0 | G4 |
| 15 | 8,4 | 0 | S4 |
| 16 | 5,6 | 0 | N2 |
| 17 | 2,8 | 0 | G2 |
| 18 | 0 | 0 | S2 |
| 19 | 0 | 28,5 | U |
| 20 | 2,8 | 28,5 | G1 |
| 21 | 7,5 | 28,5 | S1 |
| 22 | 14,5 | 28,5 | V |
| 23 | 17,3 | 28,5 | G3 |
| 24 | 22 | 28,5 | S3 |
| 25 | 29 | 28,5 | W |
| 26 | 31,8 | 28,5 | G5 |
| 27 | 36,5 | 28,5 | S5 |
| 28 | 43,5 | 28,5 | L1 |
| 29 | 52,55 | 25 | L2 |
| 30 | 52,55 | 16,9 | L3 |
| 31 | 52,55 | 8,6 | BrC |
| 32 | 52,55 | 2,8 | BrE |

The image shows a technical drawing of a package outline. The top view is a rectangle with dimensions 26,25 mm in width (X-axis) and 14,25 mm in height (Y-axis). The bottom view shows the package with pins numbered 1 through 32. The pins are arranged in a grid. The top view shows the package with pins numbered 1 through 32. The pins are arranged in a grid. The top view shows the package with pins numbered 1 through 32. The pins are arranged in a grid.

Tolerance of pinposition: ±0.5mm at the end of pins
Dimension of coordinate axis is only offset without tolerance



Pinout

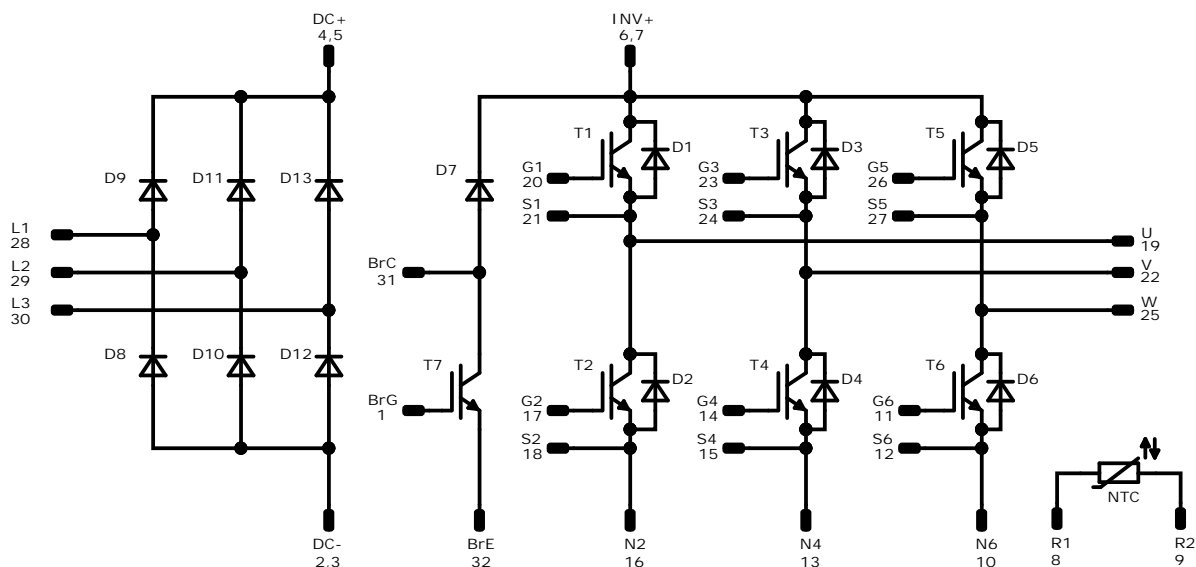

Identification

| ID | Component | Voltage | Current | Function | Comment |
|----------------------------|-----------|---------|---------|-----------------|---------|
| T2, T1, T4, T3, T6, T5 | IGBT | 1200 V | 35 A | Inverter Switch | |
| D1, D2, D3, D4, D5, D6 | FWD | 1200 V | 35 A | Inverter Diode | |
| T7 | IGBT | 1200 V | 25 A | Brake Switch | |
| D7 | FWD | 1200 V | 10 A | Brake Diode | |
| D8, D9, D10, D11, D12, D13 | Rectifier | 1600 V | 50 A | Rectifier Diode | |
| NTC | NTC | | | Thermistor | |



| Packaging instruction | | | | |
|---------------------------------------|------|----------|------|--------|
| Standard packaging quantity (SPQ) 100 | >SPQ | Standard | <SPQ | Sample |

| Handling instruction |
|---|
| Handling instructions for <i>flow 1</i> packages see vincotech.com website. |

| Package data |
|--|
| Package data for <i>flow 1</i> packages see vincotech.com website. |

| Vincotech thermistor reference |
|--|
| See Vincotech thermistor reference table at vincotech.com website. |

| UL recognition and file number |
|---|
| This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. |



| Document No.: | Date: | Modification: | Pages |
|--------------------------|--------------|----------------------------|-------|
| V23990-P580-A46-PM-D2-14 | 15 Nov. 2023 | Correction of Ic/If values | |

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.