



Vincotech

# 30-F212PMA100M7-L880A79

datasheet

flowPIM 2

1200 V / 100 A

## Features

- IGBT M7 with low  $V_{CEsat}$  and improved EMC behavior
- Open emitter configuration
- Compact and low inductive design
- Built-in NTC


## Target applications

- Industrial Drives


## Types

- 30-F212PMA100M7-L880A79

## flow 2 17 mm housing



## Schematic

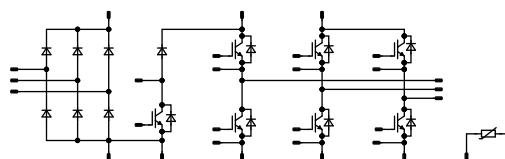



Vincotech

**30-F212PMA100M7-L880A79**  
datasheet

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>Inverter Switch</b>				
Collector-emitter voltage	$V_{CES}$		1200	V
Collector current (DC current)	$I_C$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	116	A
Repetitive peak collector current	$I_{CRM}$	$t_p$ limited by $T_{jmax}$	200	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	222	W
Gate-emitter voltage	$V_{GES}$		±20	V
Short circuit ratings	$t_{SC}$	$V_{GE} = 15\text{ V}$ , $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$	9,5	µs
Maximum junction temperature	$T_{jmax}$		175	°C

## Inverter Diode

Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	87	A
Repetitive peak forward current	$I_{FRM}$	$t_p$ limited by $T_{jmax}$	200	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	165	W
Maximum junction temperature	$T_{jmax}$		175	°C

## Brake Switch

Collector-emitter voltage	$V_{CES}$		1200	V
Collector current (DC current)	$I_C$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	94	A
Repetitive peak collector current	$I_{CRM}$	$t_p$ limited by $T_{jmax}$	150	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	190	W
Gate-emitter voltage	$V_{GES}$		±20	V
Maximum junction temperature	$T_{jmax}$		175	°C



Vincotech

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>Brake Diode</b>				
Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	41	A
Repetitive peak forward current	$I_{FRM}$	$t_p$ limited by $T_{jmax}$	70	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	80	W
Maximum junction temperature	$T_{jmax}$		175	°C

## Brake Sw. Protection Diode

Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	13	A
Repetitive peak forward current	$I_{FRM}$	$t_p$ limited by $T_{jmax}$	10	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	34	W
Maximum junction temperature	$T_{jmax}$		175	°C

## Rectifier Diode

Peak repetitive reverse voltage	$V_{RRM}$		1600	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	126	A
Surge (non-repetitive) forward current	$I_{FSM}$	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	890	A
Surge current capability	$I^2t$		3960	A <sup>2</sup> s
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	156	W
Maximum junction temperature	$T_{jmax}$		150	°C



Vincotech

**30-F212PMA100M7-L880A79**  
datasheet

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
-----------	--------	------------	-------	------

## Module Properties

### Thermal Properties

Storage temperature	$T_{\text{stg}}$		-40...+125	°C
Operation temperature under switching condition	$T_{\text{jop}}$		-40...+( $T_{\text{jmax}}$ - 25)	°C

### Isolation Properties

Isolation voltage	$V_{\text{isol}}$	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Isolation voltage	$V_{\text{isol}}$	AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			>12,7	mm
Clearance			12,01	mm
Comparative Tracking Index	CTI		≥ 200	

\*100 % tested in production





Vincotech

## Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max	

### Inverter Switch

#### Static

Gate-emitter threshold voltage	$V_{GE(th)}$			10	0,01	25	5,4	6	6,6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		100	25 125 150		1,53 1,71 1,75	1,85 <sup>(1)</sup>	V
Collector-emitter cut-off current	$I_{CES}$		0	1200		25			100	µA
Gate-emitter leakage current	$I_{GES}$		20	0		25			0,5	µA
Internal gate resistance	$r_g$							None		Ω
Input capacitance	$C_{ies}$	0	10	25				21000		pF
Output capacitance	$C_{oes}$							700		pF
Reverse transfer capacitance	$C_{res}$							280		pF
Gate charge	$Q_g$	$V_{CC} = 600$ V	15		100	25		700		nC

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,43		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

#### Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 2 \Omega$ $R_{goff} = 2 \Omega$	$\pm 15$	600	100	25 125 150		118,2 118,2 117,6		ns
Rise time	$t_r$					25 125 150		10,2 12,4 13,4		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		173,6 200,4 205,6		ns
Fall time	$t_f$					25 125 150		82,85 96,38 106,77		ns
Turn-on energy (per pulse)	$E_{on}$					25 125 150		3,26 4,87 5,37		mWs
Turn-off energy (per pulse)	$E_{off}$					25 125 150		6,6 8,77 9,49		mWs



Vincotech

# 30-F212PMA100M7-L880A79

datasheet

## Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max	

### Inverter Diode

#### Static

Forward voltage	$V_F$				100	25 125 150		1,82 1,96 1,97	2,1 <sup>(1)</sup>	V
Reverse leakage current	$I_R$	$V_i = 1200$ V				25			40	μA

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,58		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

#### Dynamic

Peak recovery current	$I_{RRM}$	$di/dt=9387$ A/μs $di/dt=7872$ A/μs $di/dt=8350$ A/μs	$\pm 15$	600	100	25 125 150		178,25 165,9 164,61		A
Reverse recovery time	$t_{rr}$					25 125 150		149,24 311,54 339,17		ns
Recovered charge	$Q_r$					25 125 150		11,6 17,27 19,18		μC
Reverse recovered energy	$E_{rec}$					25 125 150		5,14 7,75 8,59		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		4044 2649 2147		A/μs



Vincotech

**30-F212PMA100M7-L880A79**  
datasheet

## Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max	

### Brake Switch

#### Static

Gate-emitter threshold voltage	$V_{GE(th)}$			10	0,0075	25	5,4	6	6,6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		75	25 125 150		1,55 1,7 1,75	1,9 <sup>(1)</sup>	V
Collector-emitter cut-off current	$I_{CES}$		0	1200		25			100	µA
Gate-emitter leakage current	$I_{GES}$		20	0		25			500	nA
Internal gate resistance	$r_g$							4		Ω
Input capacitance	$C_{ies}$	0	10		25			16000		pF
Output capacitance	$C_{oes}$							480		pF
Reverse transfer capacitance	$C_{res}$							190		pF
Gate charge	$Q_g$	$V_{CC} = 600$ V	15		75	25		570		nC

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,5		K/W
--	---------------	---------------------------------------	--	--	--	--	--	-----	--	-----

#### Dynamic

Turn-on delay time	$t_{d(on)}$	$R_{gon} = 4$ Ω $R_{goff} = 4$ Ω	0/15	700	75	25 125 150		104,8 105,4 104		ns
Rise time	$t_r$					25 125 150		38,4 44,8 49		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		410 464 481		ns
Fall time	$t_f$					25 125 150		68,13 84,88 91,43		ns
Turn-on energy (per pulse)	$E_{on}$	$Q_{tFWD}=6,23$ µC $Q_{tFWD}=8,84$ µC $Q_{tFWD}=10,01$ µC				25 125 150		6,77 8,44 8,91		mWs
Turn-off energy (per pulse)	$E_{off}$					25 125 150		5,6 7,79 8,33		mWs



Vincotech

**30-F212PMA100M7-L880A79**  
datasheet

## Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max	

### Brake Diode

#### Static

Forward voltage	$V_F$				35	25 125 150		1,67 1,78 1,78	2,1 <sup>(1)</sup>	V
Reverse leakage current	$I_R$	$V_i = 1200$ V				25			40	µA

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						1,18		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

#### Dynamic

Peak recovery current	$I_{RRM}$	$di/dt=1820$ A/µs $di/dt=1430$ A/µs $di/dt=1500$ A/µs	0/15	700	75	25 125 150		45,4 46,24 46,77		A
Reverse recovery time	$t_{rr}$					25 125 150		319,01 462,28 500,81		ns
Recovered charge	$Q_r$					25 125 150		6,23 8,84 10,01		µC
Reverse recovered energy	$E_{rec}$					25 125 150		2,68 4,03 4,66		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		261,19 258,83 229,88		A/µs



Vincotech

## Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]		Min	Typ	Max	

### Brake Sw. Protection Diode

#### Static

Forward voltage	$V_F$				5	25 125 150		1,57 1,66 1,65	2,1 <sup>(1)</sup>		V
Reverse leakage current	$I_R$	$V_r = 1200$ V				25			20		μA

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						2,76			K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	--	-----

### Rectifier Diode

#### Static

Forward voltage	$V_F$				45	25 125 150		1,01 0,929 0,92	1,21 <sup>(1)</sup> 1,1 <sup>(1)</sup>		V
Reverse leakage current	$I_R$	$V_r = 1600$ V				25			50		μA

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,45			K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	--	-----



## Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max	

### Thermistor

#### Static

Rated resistance	$R$					25		22		kΩ
Deviation of $R_{100}$	$\Delta_{R/R}$	$R_{100} = 1484 \Omega$				100	-5		5	%
Power dissipation	$P$							5		mW
Power dissipation constant	$d$					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 1 \%$						3962		K
B-value	$B_{(25/100)}$	Tol. $\pm 1 \%$						4000		K
Vincotech Thermistor Reference									I	

<sup>(1)</sup> Value at chip level

<sup>(2)</sup> Only valid with pre-applied Vincotech thermal interface material.



Vincotech


# 30-F212PMA100M7-L880A79 datasheet

## Inverter Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

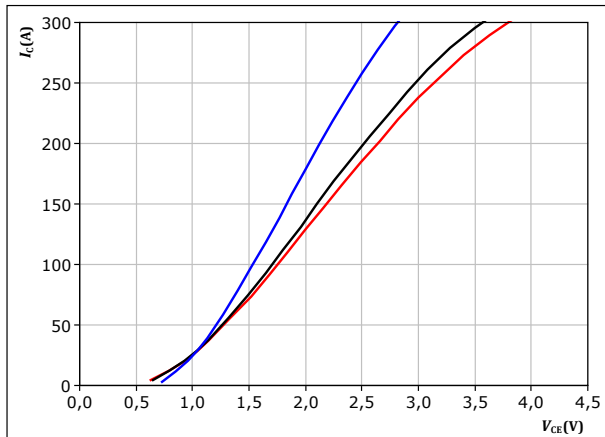


$t_p = 250 \mu s$   
 $V_{GE} = 15 V$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

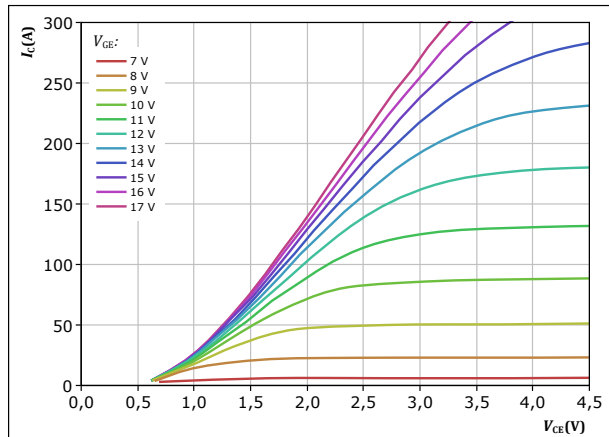


$t_p = 250 \mu s$   
 $T_j = 150 ^\circ C$   
 $V_{GE}$  from 7 V to 17 V in steps of 1 V

figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

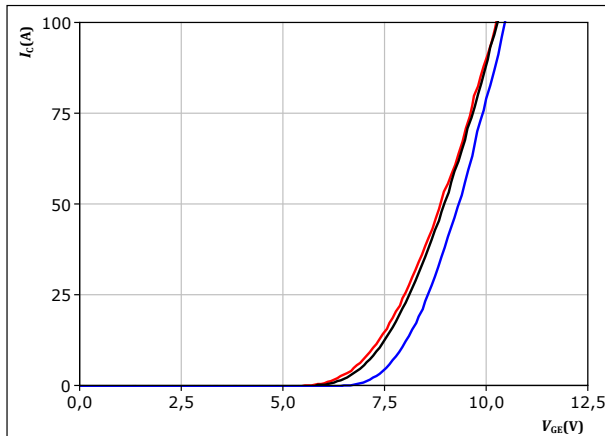


$t_p = 250 \mu s$   
 $V_{CE} = 10 V$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-a)} = f(t_p)$$

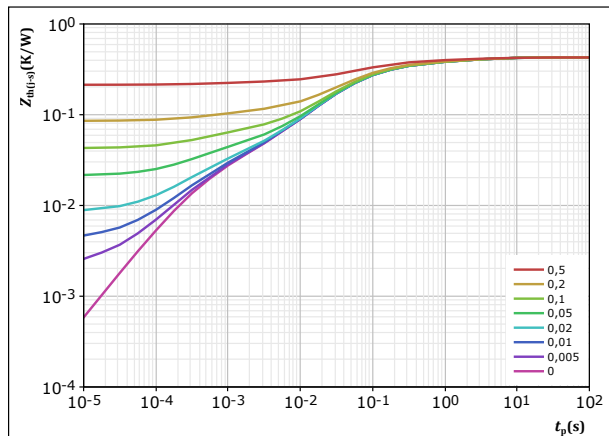

$D = t_p / T$   
 $R_{th(j-a)} = 0,427 K/W$   
IGBT thermal model values  

$R (K/W)$	$\tau (s)$
3,38E-02	4,81E+00
4,26E-02	1,02E+00
7,30E-02	2,26E-01
1,67E-01	6,44E-02
8,34E-02	1,89E-02
1,52E-02	1,20E-03
1,24E-02	3,17E-04



Vincotech


# 30-F212PMA100M7-L880A79 datasheet

## Inverter Switch Characteristics

figure 5. IGBT

Safe operating area

$$I_C = f(V_{CE})$$

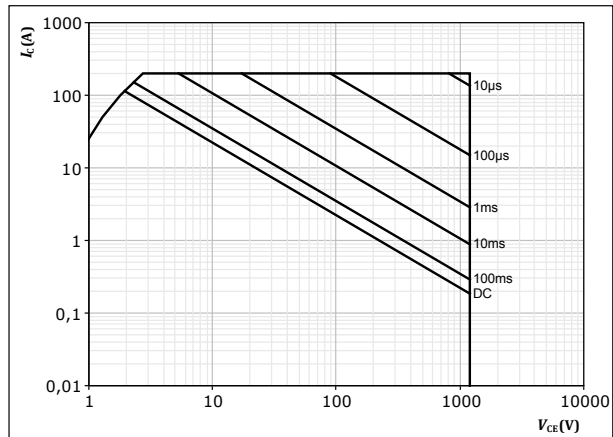


$D =$  single pulse  
 $T_s = 80$  °C  
 $V_{GE} = 15$  V  
 $T_j = T_{jmax}$

figure 6. IGBT

Gate voltage vs gate charge

$$V_{GE} = f(Q_g)$$

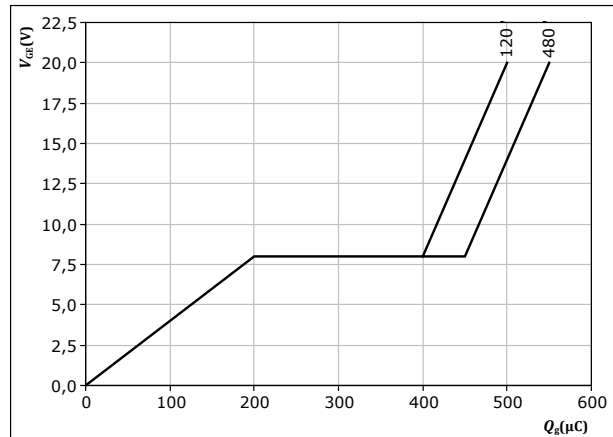

$I_C =$  A  
 $T_j = 25$  °C





Vincotech

# 30-F212PMA100M7-L880A79 datasheet

## Inverter Diode Characteristics

figure 7.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$


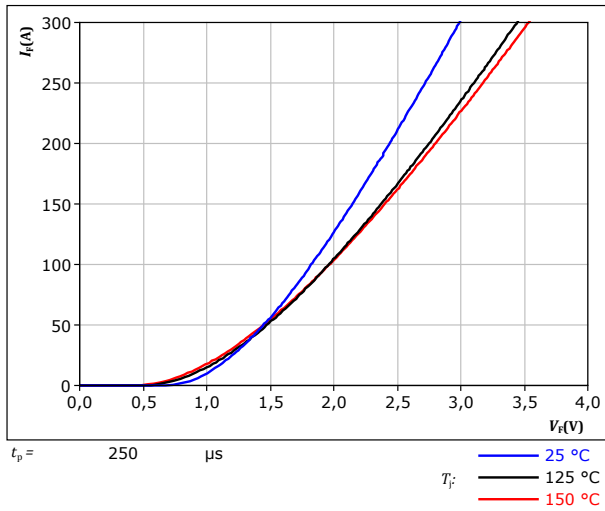


figure 8.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

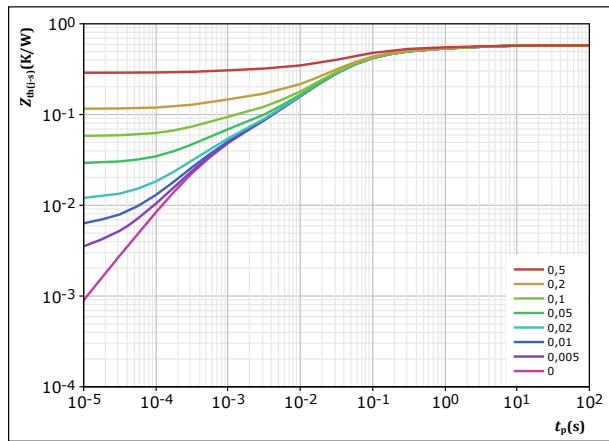

$D =$	$t_p / T$	
$R_{th(j-s)} =$	0,578	K/W
FWD thermal model values		
$R$ (K/W)	$\tau$ (s)	
4,89E-02	3,41E+00	
7,07E-02	4,06E-01	
2,02E-01	7,46E-02	
1,90E-01	2,27E-02	
3,24E-02	3,47E-03	
3,35E-02	4,78E-04	



Vincotech

# 30-F212PMA100M7-L880A79 datasheet


## Brake Switch Characteristics

figure 9.

IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

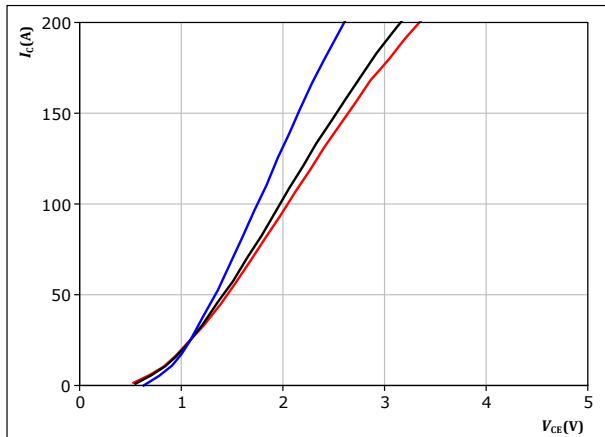

$t_p = 250 \mu s$   
 $V_{GE} = 15 V$


$T_j$ : 25 °C  
125 °C  
150 °C

figure 10.

IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

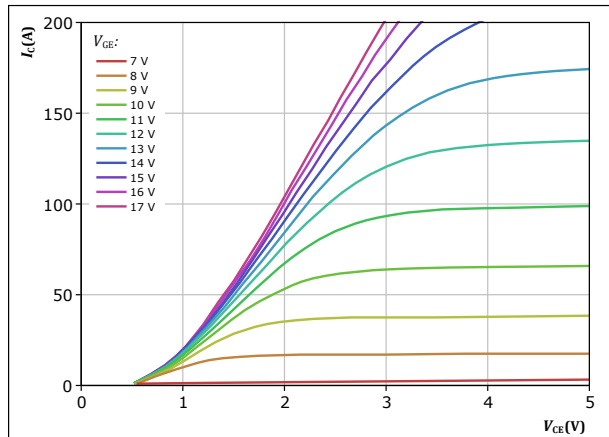


$t_p = 250 \mu s$   
 $T_j = 150 ^\circ C$   
 $V_{GE}$  from 7 V to 17 V in steps of 1 V

figure 11.

IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

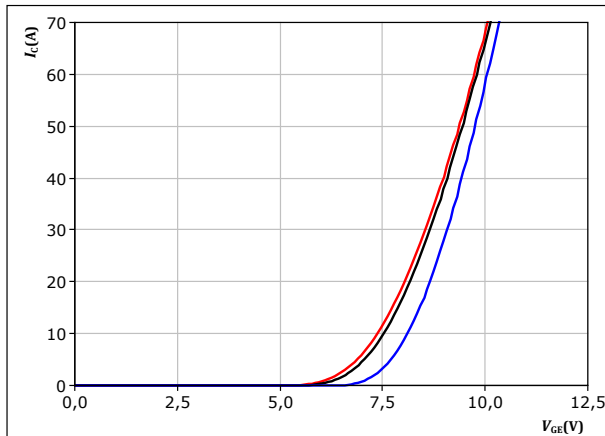

$t_p = 250 \mu s$   
 $V_{CE} = 10 V$


$T_j$ : 25 °C  
125 °C  
150 °C

figure 12.

IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

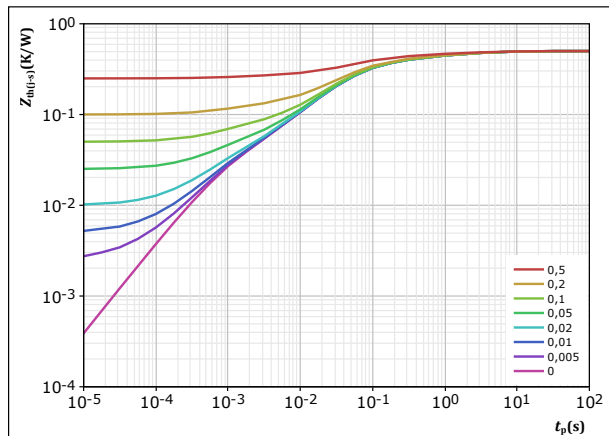

$D = t_p / T$   
 $R_{th(j-s)} = 0,5 K/W$   
IGBT thermal model values  

$R (K/W)$	$\tau (s)$
3,92E-02	4,73E+00
6,01E-02	9,48E-01
1,18E-01	1,70E-01
2,25E-01	3,80E-02
3,32E-02	9,18E-03
2,48E-02	8,63E-04



Vincotech

**30-F212PMA100M7-L880A79**  
datasheet


## Brake Switch Characteristics

figure 13.

IGBT

Safe operating area

$$I_C = f(V_{CE})$$

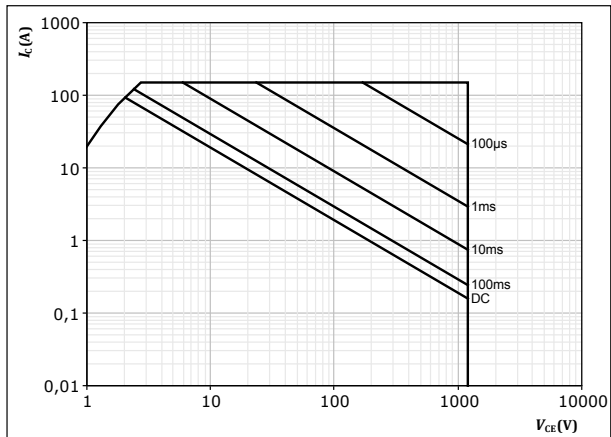

$D$  = single pulse

$T_s = 80$  °C

$V_{GE} = 15$  V

$T_j = T_{jmax}$



Vincotech

**30-F212PMA100M7-L880A79**  
datasheet

## Brake Diode Characteristics

figure 14.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$


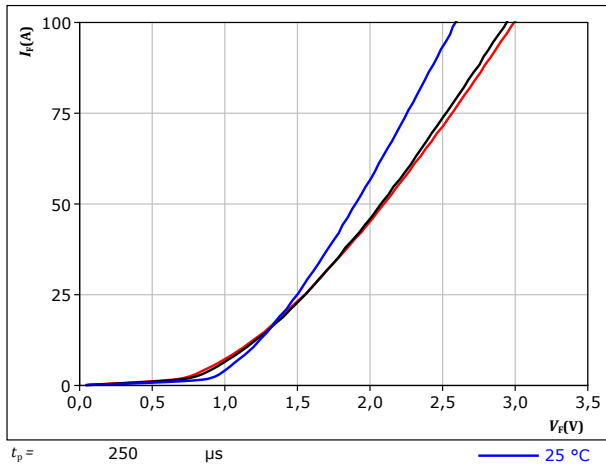


figure 15.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

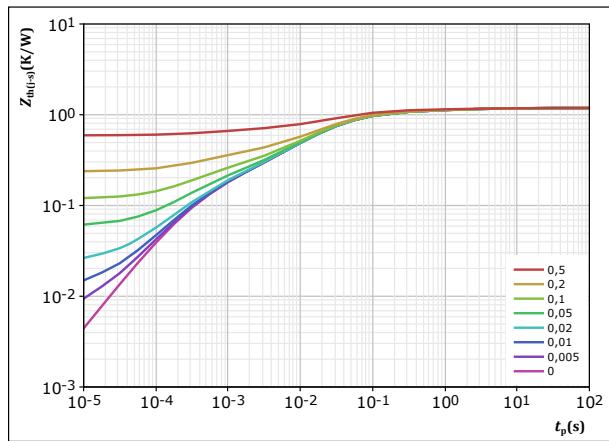



Vincotech

## 30-F212PMA100M7-L880A79 datasheet


### Brake Sw. Protection Diode Characteristics

figure 16.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$

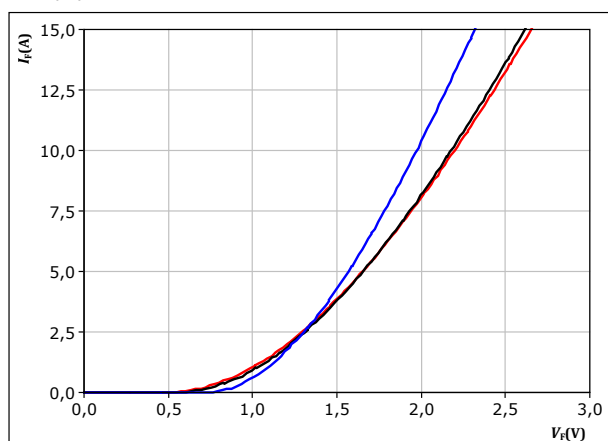

$t_p = 250 \mu s$


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 17.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

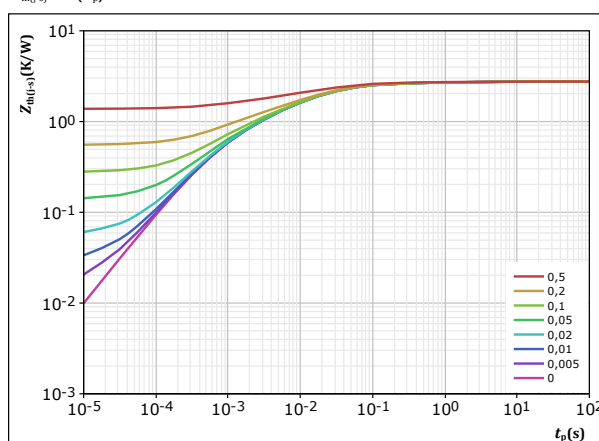

$D = t_p / T$   
 $R_{th(j-s)} = 2,759 \text{ K/W}$

FWD thermal model values

$R$ (K/W)	$\tau$ (s)
6,58E-02	4,81E+00
1,43E-01	3,47E-01
6,08E-01	4,61E-02
8,65E-01	1,40E-02
7,08E-01	2,91E-03
3,69E-01	5,42E-04



Vincotech


## Rectifier Diode Characteristics

figure 18.

Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$

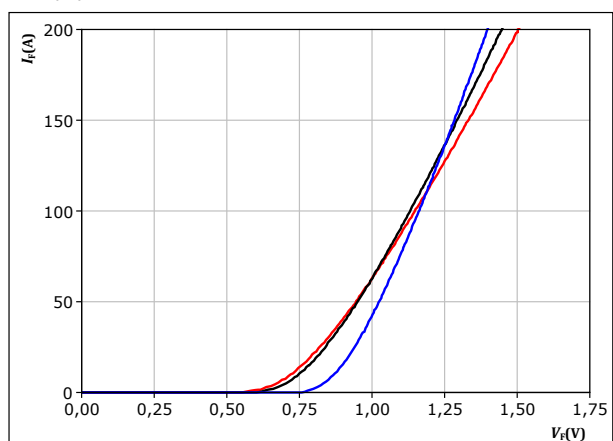

$t_p = 250 \mu s$


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 19.

Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

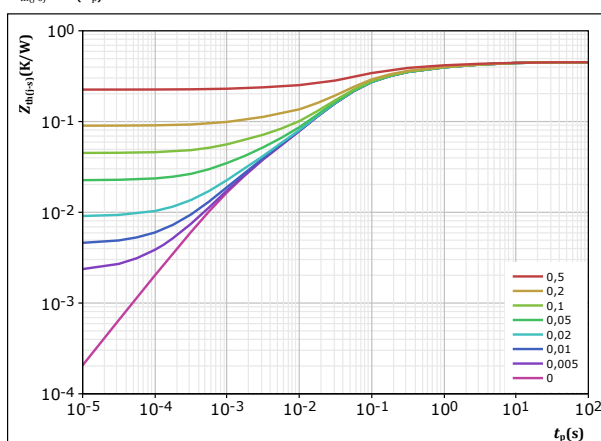

$D = t_p / T$   
 $R_{th(j-s)} = 0,45 \text{ K/W}$

Rectifier thermal model values

$R \text{ (K/W)}$	$\tau \text{ (s)}$
3,06E-02	7,38E+00
5,87E-02	1,30E+00
1,21E-01	1,90E-01
2,00E-01	4,49E-02
2,12E-02	9,83E-03
1,85E-02	1,38E-03



Vincotech

**30-F212PMA100M7-L880A79**  
datasheet


## Thermistor Characteristics

figure 20.

Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

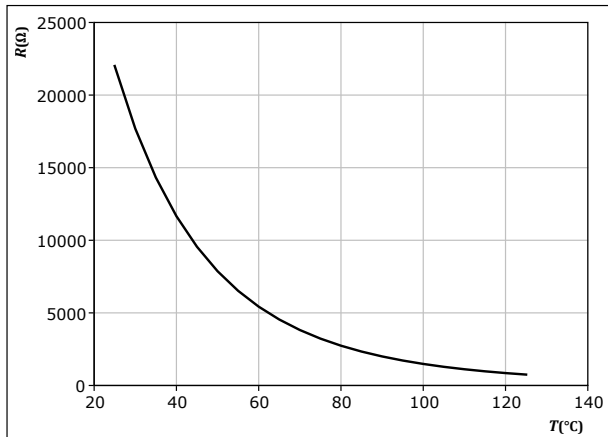



Vincotech

# 30-F212PMA100M7-L880A79 datasheet


## Inverter Switching Characteristics

figure 21.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

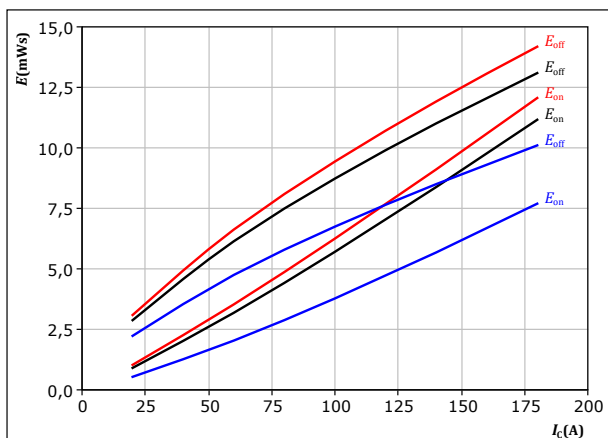

With an inductive load at

$V_{CE} = 600 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{gon} = 2 \text{ } \Omega$   
 $R_{goff} = 2 \text{ } \Omega$


$T_j$ : 25 °C  
125 °C  
150 °C

figure 22.

IGBT

Typical switching energy losses as a function of gate resistor

$$E = f(R_g)$$

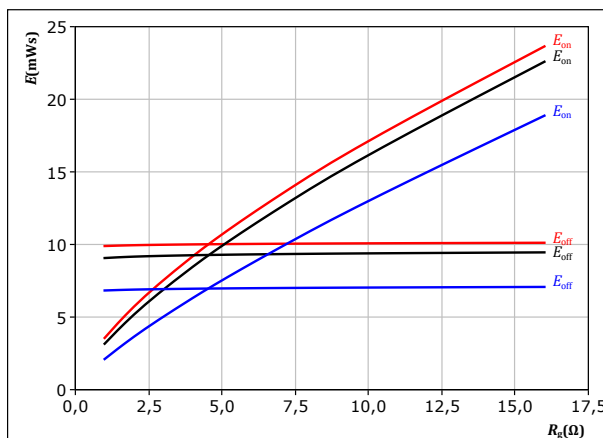

With an inductive load at

$V_{CE} = 600 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_C = 100 \text{ A}$


$T_j$ : 25 °C  
125 °C  
150 °C

figure 23.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

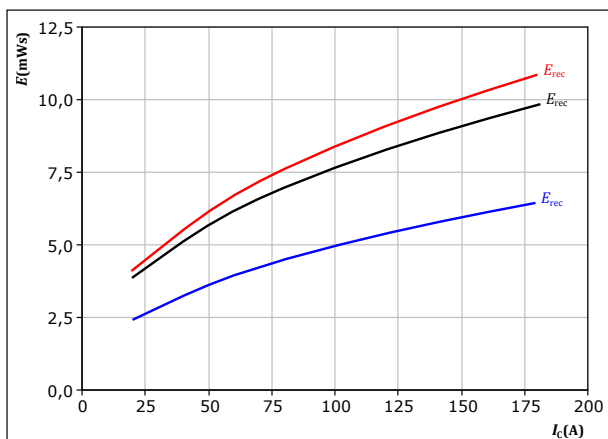

With an inductive load at

$V_{CE} = 600 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{gon} = 2 \text{ } \Omega$


$T_j$ : 25 °C  
125 °C  
150 °C

figure 24.

FWD

Typical reverse recovered energy loss as a function of gate resistor

$$E_{rec} = f(R_g)$$

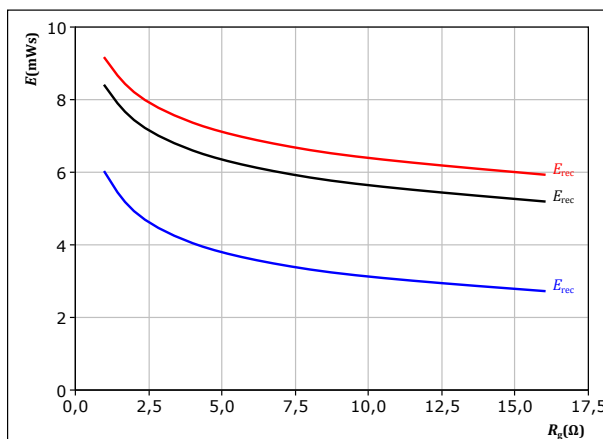

With an inductive load at

$V_{CE} = 600 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_C = 100 \text{ A}$

$T_j$ : 25 °C  
125 °C  
150 °C






Vincotech

30-F212PMA100M7-L880A79  
datasheet

## Inverter Switching Characteristics

figure 25. IGBT

Typical switching times as a function of collector current  
 $t = f(I_C)$

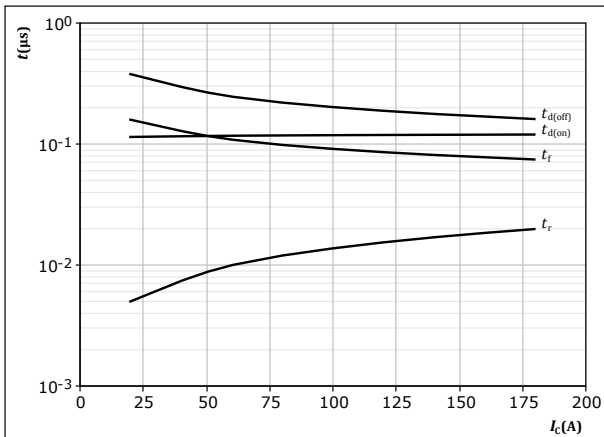


With an inductive load at

$T_j = 150$  °C  
 $V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 2$   $\Omega$   
 $R_{goff} = 2$   $\Omega$

figure 26. IGBT

Typical switching times as a function of gate resistor  
 $t = f(R_g)$

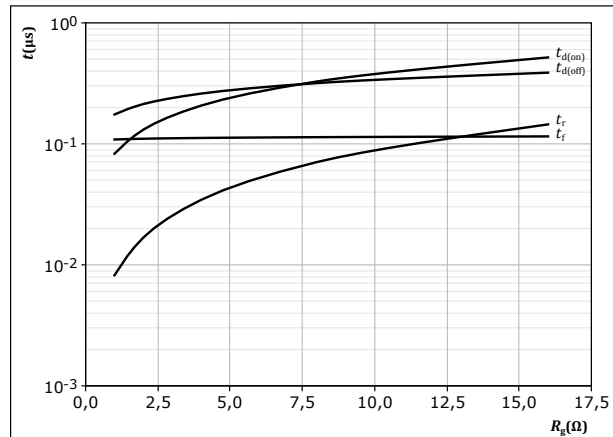


With an inductive load at

$T_j = 150$  °C  
 $V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_C = 100$  A

figure 27. FWD

Typical reverse recovery time as a function of collector current  
 $t_{rr} = f(I_C)$

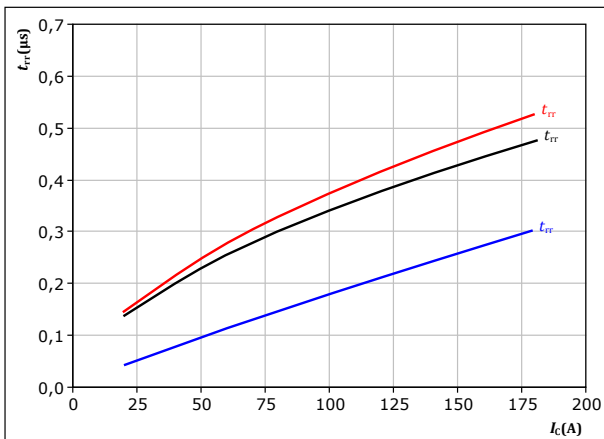


With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 2$   $\Omega$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 28. FWD

Typical reverse recovery time as a function of IGBT turn off gate resistor  
 $t_{rr} = f(R_{goff})$

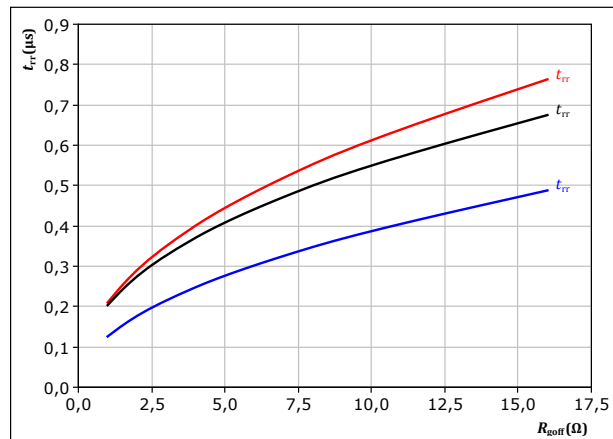

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_C = 100$  A

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C



Vincotech

30-F212PMA100M7-L880A79  
datasheet


## Inverter Switching Characteristics

figure 29.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

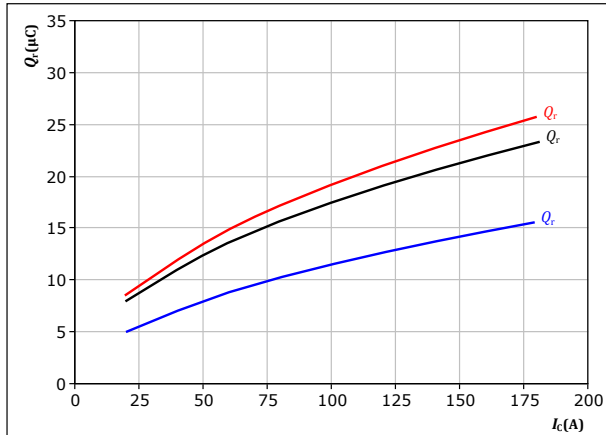

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 2$  Ω


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 31.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

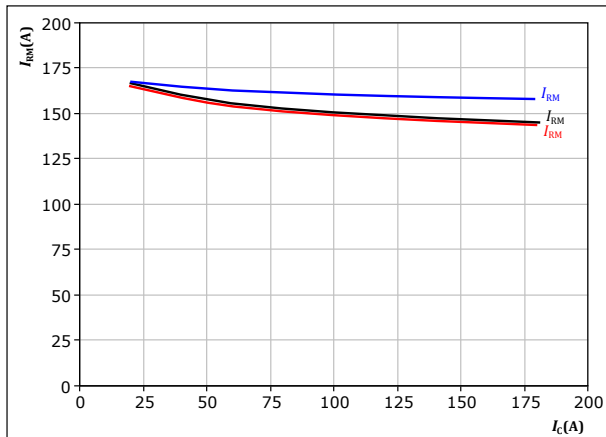

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 2$  Ω


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 30.

FWD

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

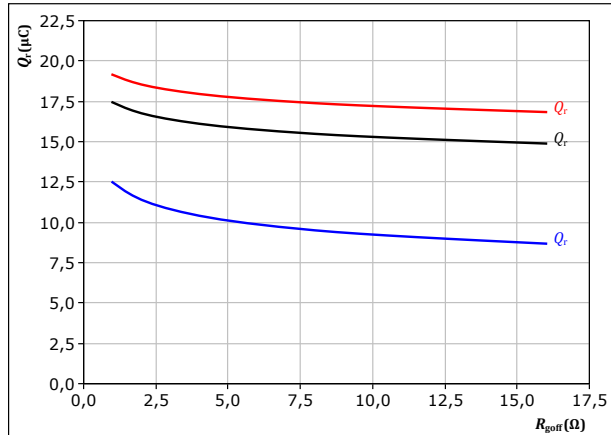

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 100$  A


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 32.

FWD

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

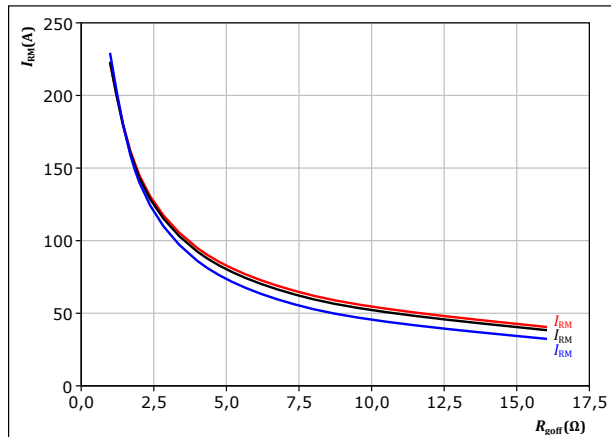

With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 100$  A

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C




Vincotech

30-F212PMA100M7-L880A79  
datasheet

## Inverter Switching Characteristics

figure 33. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current  
 $di_f/dt, di_r/dt = f(I_C)$

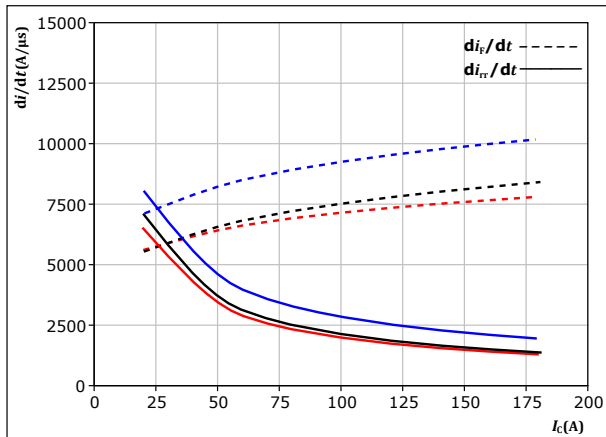


With an inductive load at

$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 2$   $\Omega$

$T_j = 25$  °C  
125 °C  
150 °C

figure 34. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor  
 $di_f/dt, di_r/dt = f(R_{goff})$

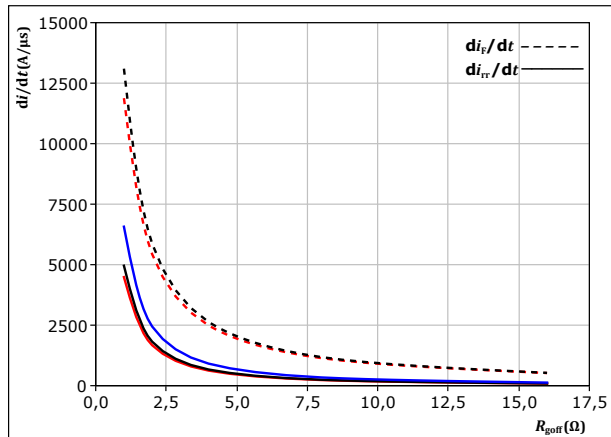

With an inductive load at


$V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_C = 100$  A

$T_j = 25$  °C  
125 °C  
150 °C

figure 35. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

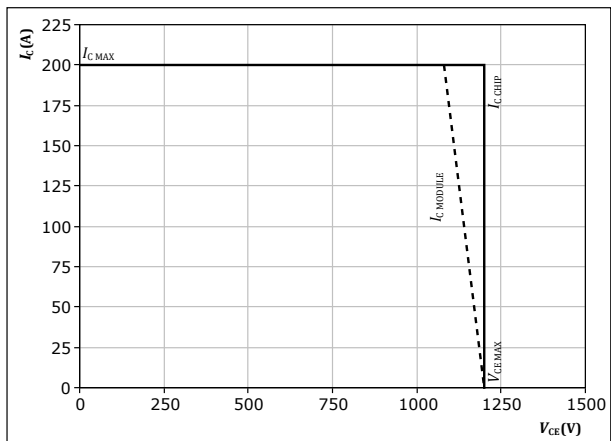

At  $T_j = 150$  °C  
 $R_{gon} = 2$   $\Omega$   
 $R_{goff} = 2$   $\Omega$



Vincotech

# 30-F212PMA100M7-L880A79 datasheet


## Brake Switching Characteristics

figure 36.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_c)$$

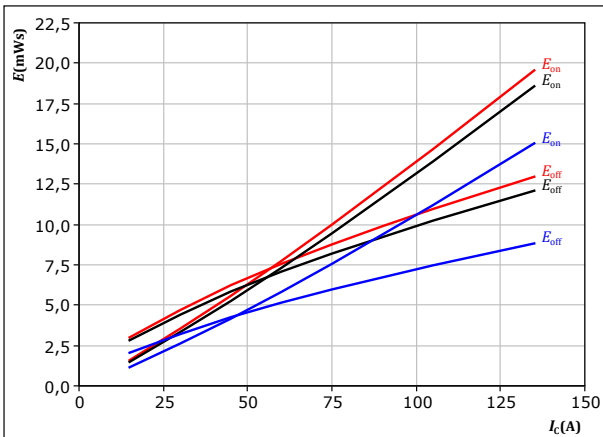

With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = 0/15 \text{ V}$   
 $R_{gon} = 4 \text{ } \Omega$   
 $R_{goff} = 4 \text{ } \Omega$


$T_j$ :  $25 \text{ } ^\circ\text{C}$  (blue)  
 $125 \text{ } ^\circ\text{C}$  (black)  
 $150 \text{ } ^\circ\text{C}$  (red)

figure 38.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_c)$$

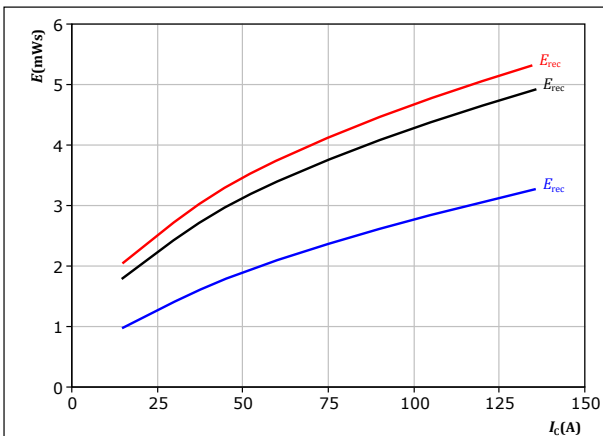

With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = 0/15 \text{ V}$   
 $R_{gon} = 4 \text{ } \Omega$


$T_j$ :  $25 \text{ } ^\circ\text{C}$  (blue)  
 $125 \text{ } ^\circ\text{C}$  (black)  
 $150 \text{ } ^\circ\text{C}$  (red)

figure 37.

IGBT

Typical switching energy losses as a function of gate resistor

$$E = f(R_g)$$

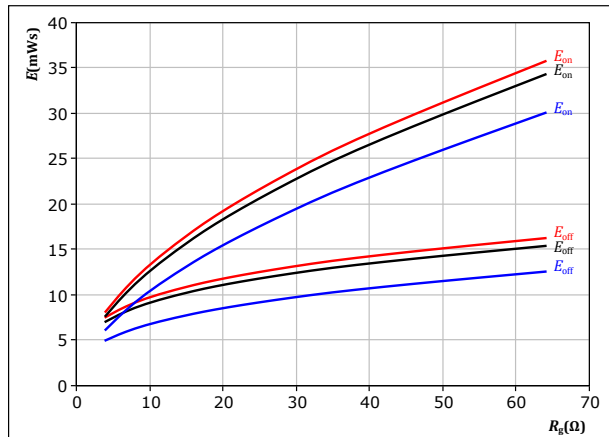

With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = 0/15 \text{ V}$   
 $I_c = 75 \text{ A}$


$T_j$ :  $25 \text{ } ^\circ\text{C}$  (blue)  
 $125 \text{ } ^\circ\text{C}$  (black)  
 $150 \text{ } ^\circ\text{C}$  (red)

figure 39.

FWD

Typical reverse recovered energy loss as a function of gate resistor

$$E_{rec} = f(R_g)$$

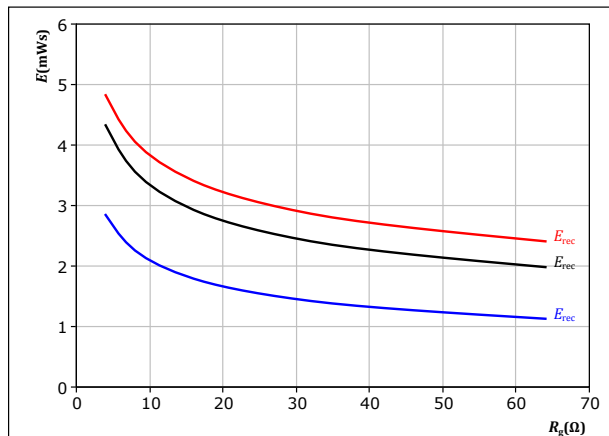

With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = 0/15 \text{ V}$   
 $I_c = 75 \text{ A}$

$T_j$ :  $25 \text{ } ^\circ\text{C}$  (blue)  
 $125 \text{ } ^\circ\text{C}$  (black)  
 $150 \text{ } ^\circ\text{C}$  (red)



Vincotech

30-F212PMA100M7-L880A79  
datasheet


## Brake Switching Characteristics

figure 40.

IGBT

Typical switching times as a function of collector current

$$t = f(I_C)$$

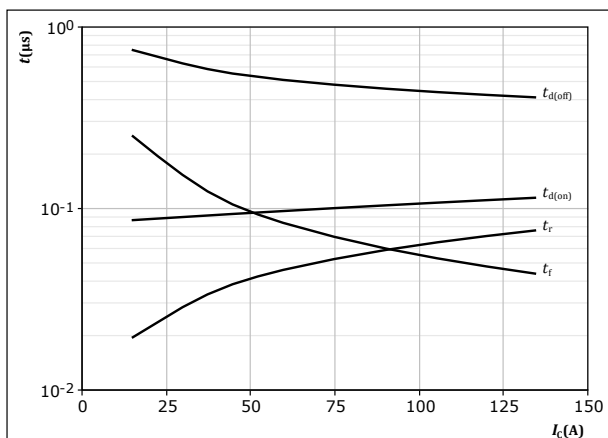

With an inductive load at


$T_j = 150 \text{ } ^\circ\text{C}$   
 $V_{CE} = 700 \text{ V}$   
 $V_{GE} = 0/15 \text{ V}$   
 $R_{gon} = 4 \text{ } \Omega$   
 $R_{goff} = 4 \text{ } \Omega$

figure 41.

IGBT

Typical switching times as a function of gate resistor

$$t = f(R_g)$$

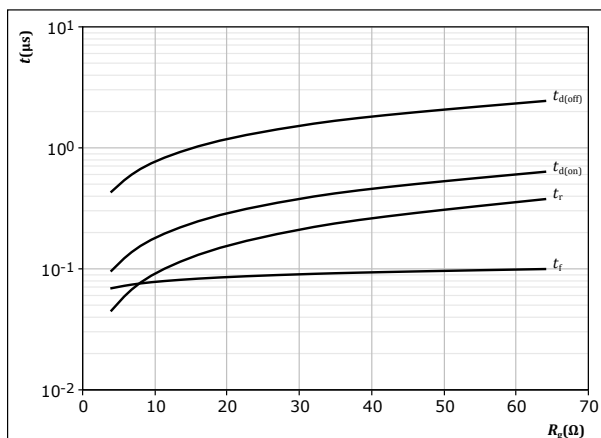

With an inductive load at


$T_j = 150 \text{ } ^\circ\text{C}$   
 $V_{CE} = 700 \text{ V}$   
 $V_{GE} = 0/15 \text{ V}$   
 $I_C = 75 \text{ A}$

figure 42.

FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_C)$$

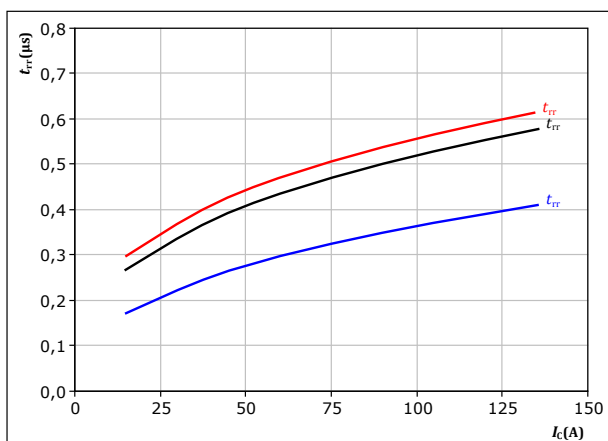

With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = 0/15 \text{ V}$   
 $R_{gon} = 4 \text{ } \Omega$


$T_j$ : 25 °C  
 125 °C  
 150 °C

figure 43.

FWD

Typical reverse recovery time as a function of IGBT turn off gate resistor

$$t_{rr} = f(R_{goff})$$

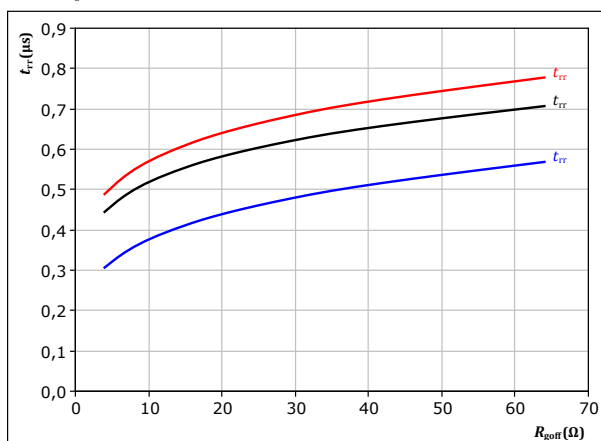

With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = 0/15 \text{ V}$   
 $I_C = 75 \text{ A}$

$T_j$ : 25 °C  
 125 °C  
 150 °C



Vincotech

30-F212PMA100M7-L880A79  
datasheet


## Brake Switching Characteristics

figure 44.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

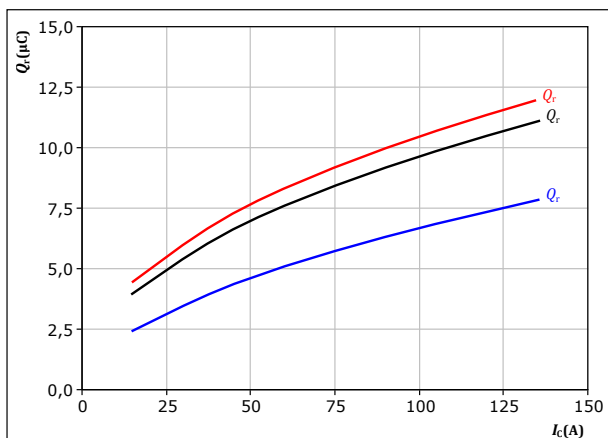

With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $R_{gon} = 4$  Ω


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 46.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

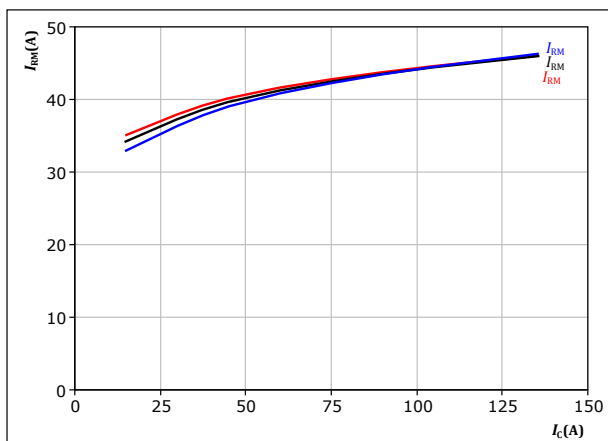

With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $R_{gon} = 4$  Ω


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 45.

FWD

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

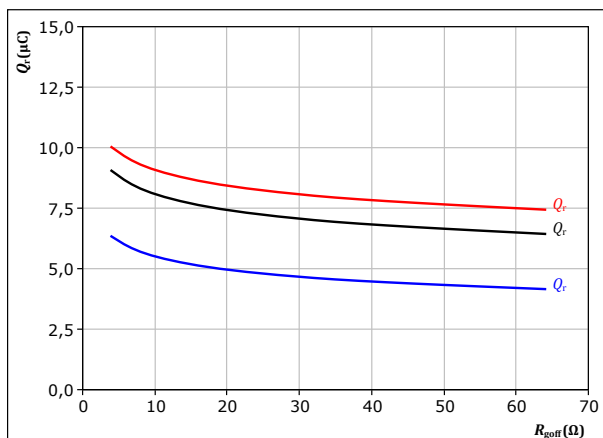

With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $I_c = 75$  A


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 47.

FWD

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

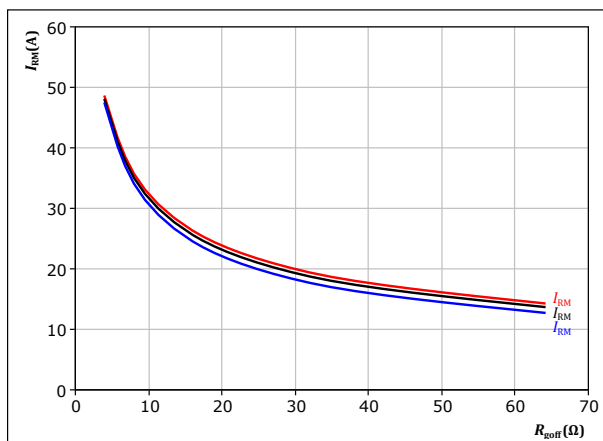

With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $I_c = 75$  A

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C




Vincotech

**30-F212PMA100M7-L880A79**  
datasheet

## Brake Switching Characteristics

**figure 48.** FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current  
 $di_f/dt, di_r/dt = f(I_c)$

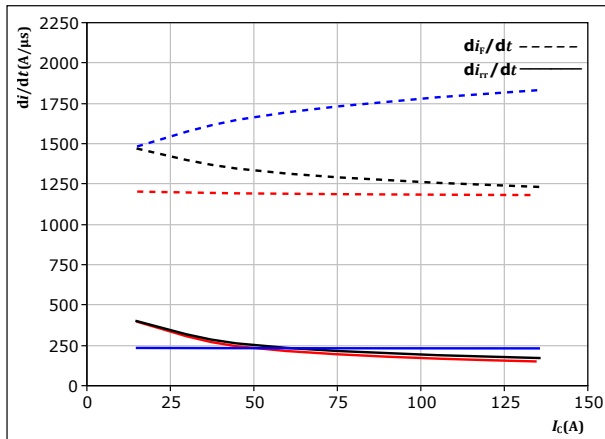


With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $R_{gon} = 4$   $\Omega$   
 $T_j: 25^\circ\text{C}$  (blue),  $125^\circ\text{C}$  (black),  $150^\circ\text{C}$  (red)

**figure 49.** FWD

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor  
 $di_f/dt, di_r/dt = f(R_{goff})$

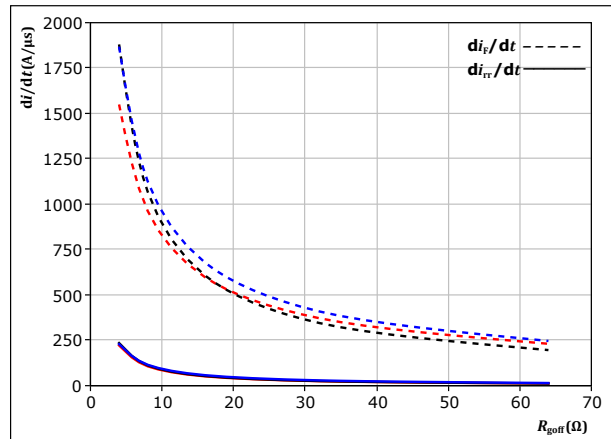


With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = 0/15$  V  
 $I_c = 75$  A  
 $T_j: 25^\circ\text{C}$  (blue),  $125^\circ\text{C}$  (black),  $150^\circ\text{C}$  (red)

**figure 50.** IGBT

Reverse bias safe operating area

$I_c = f(V_{CE})$

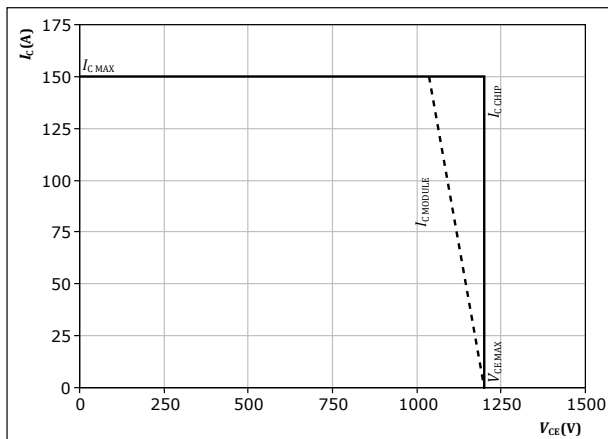

At  $T_j = 150^\circ\text{C}$   
 $R_{gon} = 4$   $\Omega$   
 $R_{goff} = 4$   $\Omega$



Vincotech

## Switching Definitions

figure 51. IGBT

Turn-off Switching Waveforms & definition of  $t_{doff}$ ,  $t_{Eoff}$  ( $t_{Eoff}$  = integrating time for  $E_{off}$ )

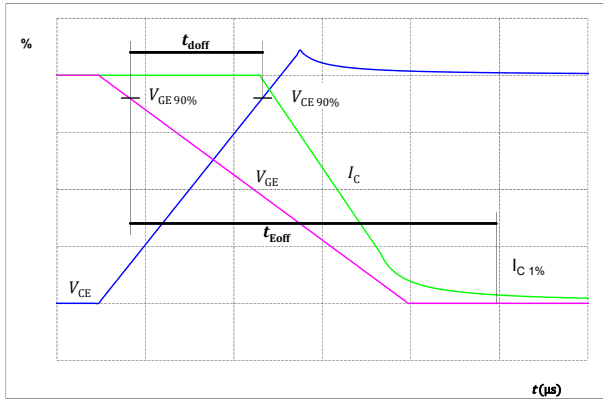


figure 52. IGBT

Turn-on Switching Waveforms & definition of  $t_{don}$ ,  $t_{Eon}$  ( $t_{Eon}$  = integrating time for  $E_{on}$ )

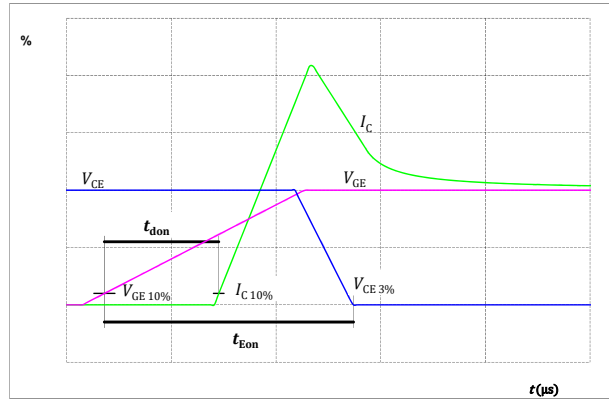


figure 53. IGBT

Turn-off Switching Waveforms & definition of  $t_f$


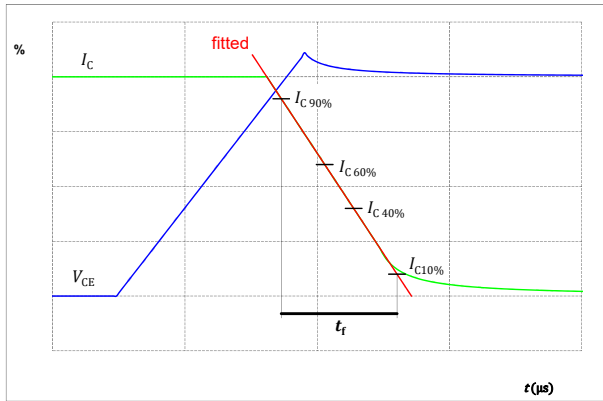


figure 54. IGBT

Turn-on Switching Waveforms & definition of  $t_r$





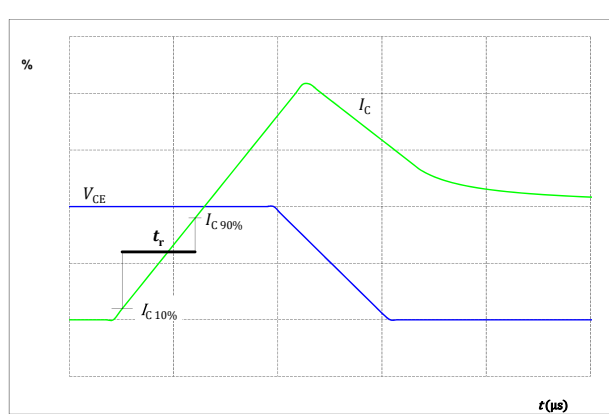

Vincotech

# 30-F212PMA100M7-L880A79

datasheet

## Switching Definitions

figure 55. FWD

Turn-off Switching Waveforms & definition of  $t_{rr}$


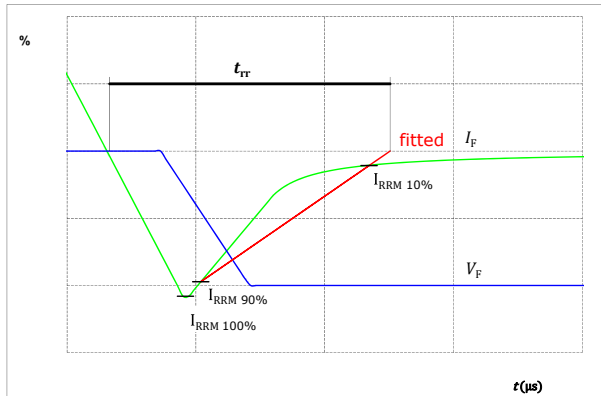


figure 56. FWD

Turn-on Switching Waveforms & definition of  $t_{Qr}$  ( $t_{Qr}$  = integrating time for  $Q_r$ )



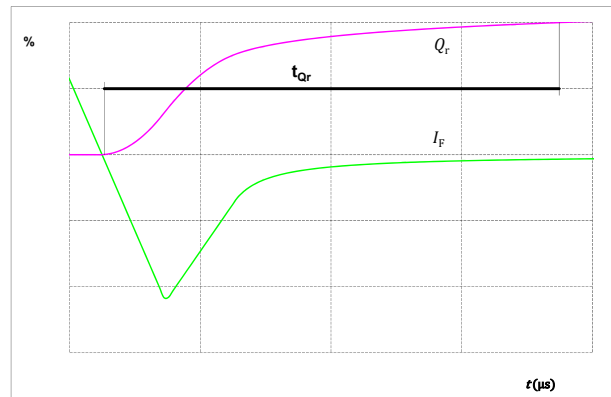

Vincotech

# 30-F212PMA100M7-L880A79

datasheet

Ordering Code	
Version	Ordering Code
Without thermal paste	30-F212PMA100M7-L880A79
With thermal paste (3,4 W/mK, PSX-P7)	30-F212PMA100M7-L880A79-/3/

Marking						
	Text	Name	Date code	UL & VIN	Lot	Serial
		NN-NNNNNNNNNNNNNNNNNNNN- TTTTUVV	WWYY	UL VIN	LLLL	SSSS
	Datamatrix	Type&Ver	Lot number	Serial	Date code	
		TTTTTUVV	LLLLL	SSSS	WWYY	

Outline							
Pin table [mm]							
Pin	X	Y	Function	29	0	37,2	Ph3
1	71,2	0	DC-Rect	30	2,5	37,2	Ph3
2	68,7	0	DC-Rect	31	5	37,2	Ph3
3	66,2	0	DC-Rect	32	7,8	37,2	S16
4	63,7	0	DC-Rect	33	10,6	37,2	G16
5	55,95	0	DC+Rect	34	18,45	37,2	G14
6	53,45	0	DC+Rect	35	21,25	37,2	S14
7	55,95	2,8	DC+Rect	36	24,05	37,2	Ph2
8	53,45	2,8	DC+Rect	37	26,55	37,2	Ph2
9	48,4	0	DC+Inv1	38	29,05	37,2	Ph2
10	45,9	0	DC+Inv1	39	36,1	37,2	Ph1
11	38,9	0	S11	40	38,6	37,2	Ph1
12	36,1	0	DC-1	41	41,1	37,2	Ph1
13	38,9	2,8	G11	42	43,9	37,2	S12
14	36,1	2,8	DC-1	43	46,7	37,2	G12
15	31,3	0	DC-2	44	53,7	37,2	ACIn1
16	28,5	0	S13	45	56,2	37,2	ACIn1
17	31,3	2,8	DC-2	46	58,7	37,2	ACIn1
18	28,5	2,8	G13	47	71,2	37,2	ACIn2
19	19,3	0	Therm2	48	71,2	34,7	ACIn2
20	19,3	2,8	Therm1	49	71,2	32,2	ACIn2
21	12,3	0	DC+Inv2	50	71,2	25,2	ACIn3
22	9,8	0	DC+Inv2	51	71,2	22,7	ACIn3
23	12,3	2,8	DC+Inv2	52	71,2	20,2	ACIn3
24	9,8	2,8	DC+Inv2	53	68,7	12,8	Br
25	2,8	0	S15	54	71,2	12,8	Br
26	0	0	DC-3	55	71,2	5,6	G27
27	2,8	2,8	G15	56	71,2	2,8	DC-Br
28	0	2,8	DC-3				




Vincotech

# 30-F212PMA100M7-L880A79

datasheet

## Pinout

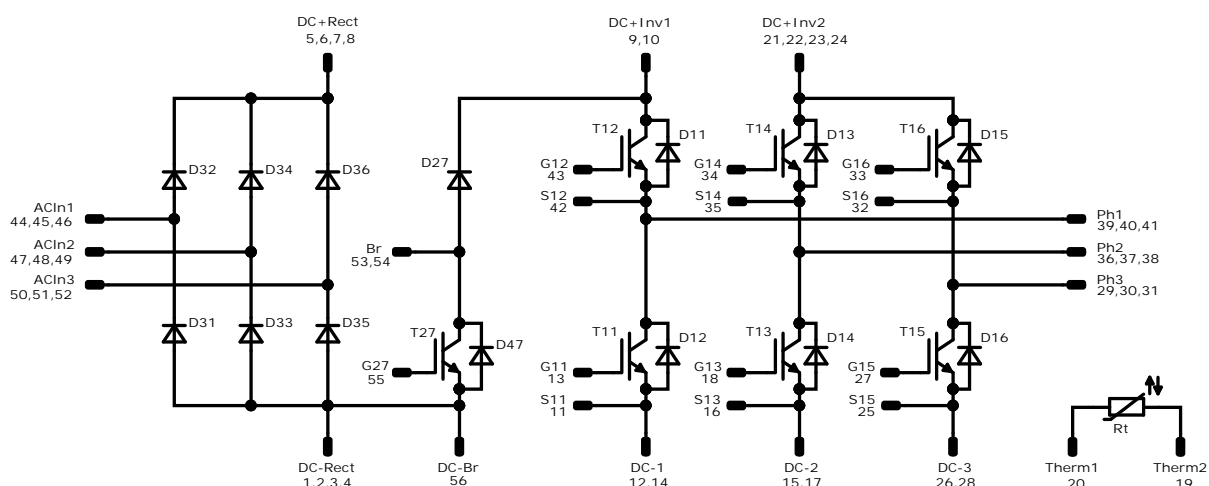


## Identification

ID	Component	Voltage	Current	Function	Comment
T11, T12, T13, T14, T15, T16	IGBT	1200 V	100 A	Inverter Switch	
D11, D12, D13, D14, D15, D16	FWD	1200 V	100 A	Inverter Diode	
T27	IGBT	1200 V	75 A	Brake Switch	
D27	FWD	1200 V	35 A	Brake Diode	
D47	FWD	1200 V	5 A	Brake Sw. Protection Diode	
D31, D32, D33, D34, D35, D36	Rectifier	1600 V	75 A	Rectifier Diode	
Rt	NTC			Thermistor	



Vincotech

**30-F212PMA100M7-L880A79**  
datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 36	>SPQ	Standard	<SPQ	Sample
Handling instruction				
Handling instructions for <i>flow 2</i> packages see vincotech.com website.				
Package data				
Package data for <i>flow 2</i> packages see vincotech.com website.				
Vincotech thermistor reference				
See Vincotech thermistor reference table at vincotech.com website.				
UL recognition and file number				
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website.				

Document No.:	Date:	Modification:	Pages
30-F212PMA100M7-L880A79-D5-14	25 Sep. 2021	Updated maximum current Updated clearance Rectifier forward voltage condition changed Brake diode forward voltage is updated Brake Sw. Protection Diode thermal characteristics updated Separated datasheet for solder pin version New datasheet format module is unchanged	

**DISCLAIMER**

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

**LIFE SUPPORT POLICY**

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.