



Vincotech

# 10-FY073AA050RG01-LK14L08

datasheet

flow3xANPFC 1

650 V / 50 A

## Features

- 3xAdvanced Neutral Boost PFC
- Integrated DC capacitor
- Kelvin Emitter for improved switching performance


## Target applications

- Charging Stations
- Power Supply


## Types

- 10-FY073AA050RG01-LK14L08

## flow 1 12 mm housing



## Schematic

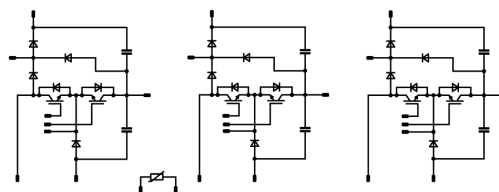



Vincotech

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

| Parameter | Symbol | Conditions | Value | Unit |
|-----------|--------|------------|-------|------|
|-----------|--------|------------|-------|------|

### Negative Neutral Point Switch

|                                   |            |  |          |    |
|-----------------------------------|------------|--|----------|----|
| Collector-emitter voltage         | $V_{CES}$  |  | 650      | V  |
| Collector current (DC current)    | $I_C$      | $T_j = T_{jmax}$<br>$T_s = 80\text{ °C}$ | 46       | A  |
| Repetitive peak collector current | $I_{CRM}$  | $t_p$ limited by $T_{jmax}$              | 200      | A  |
| Total power dissipation           | $P_{tot}$  | $T_j = T_{jmax}$<br>$T_s = 80\text{ °C}$ | 77       | W  |
| Gate-emitter voltage              | $V_{GES}$  |  | $\pm 30$ | V  |
| Maximum junction temperature      | $T_{jmax}$ |  | 175      | °C |

### Positive Neutral Point Switch

|                                   |            |  |          |    |
|-----------------------------------|------------|--|----------|----|
| Collector-emitter voltage         | $V_{CES}$  |  | 650      | V  |
| Collector current (DC current)    | $I_C$      | $T_j = T_{jmax}$<br>$T_s = 80\text{ °C}$ | 46       | A  |
| Repetitive peak collector current | $I_{CRM}$  | $t_p$ limited by $T_{jmax}$              | 200      | A  |
| Total power dissipation           | $P_{tot}$  | $T_j = T_{jmax}$<br>$T_s = 80\text{ °C}$ | 77       | W  |
| Gate-emitter voltage              | $V_{GES}$  |  | $\pm 30$ | V  |
| Maximum junction temperature      | $T_{jmax}$ |  | 175      | °C |

### Negative Boost Diode

|                                 |            |  |     |    |
|---------------------------------|------------|--|-----|----|
| Peak repetitive reverse voltage | $V_{RRM}$  |  | 650 | V  |
| Forward current (DC current)    | $I_F$      | $T_j = T_{jmax}$<br>$T_s = 80\text{ °C}$ | 32  | A  |
| Total power dissipation         | $P_{tot}$  | $T_j = T_{jmax}$<br>$T_s = 80\text{ °C}$ | 48  | W  |
| Maximum junction temperature    | $T_{jmax}$ |  | 175 | °C |

### Positive Boost Diode

|                                 |            |  |     |    |
|---------------------------------|------------|--|-----|----|
| Peak repetitive reverse voltage | $V_{RRM}$  |  | 650 | V  |
| Forward current (DC current)    | $I_F$      | $T_j = T_{jmax}$<br>$T_s = 80\text{ °C}$ | 32  | A  |
| Total power dissipation         | $P_{tot}$  | $T_j = T_{jmax}$<br>$T_s = 80\text{ °C}$ | 48  | W  |
| Maximum junction temperature    | $T_{jmax}$ |  | 175 | °C |



Vincotech

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

| Parameter | Symbol | Conditions | Value | Unit |
|-----------|--------|------------|-------|------|
|-----------|--------|------------|-------|------|

### Negative Neutral Point Diode

|  |            |  |      |                  |
|--|------------|--|------|------------------|
| Peak repetitive reverse voltage        | $V_{RRM}$  |  | 1600 | V                |
| Forward current (DC current)           | $I_F$      | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$                                | 36   | A                |
| Surge (non-repetitive) forward current | $I_{FSM}$  | Single Half Sine Wave,<br>$t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$ | 270  | A                |
| Surge current capability               | $I^2t$     |  | 360  | A <sup>2</sup> s |
| Total power dissipation                | $P_{tot}$  | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$                                | 46   | W                |
| Maximum junction temperature           | $T_{jmax}$ |  | 150  | °C               |

### Positive Neutral Point Diode

|  |            |  |      |                  |
|--|------------|--|------|------------------|
| Peak repetitive reverse voltage        | $V_{RRM}$  |  | 1600 | V                |
| Forward current (DC current)           | $I_F$      | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$                                | 47   | A                |
| Surge (non-repetitive) forward current | $I_{FSM}$  | Single Half Sine Wave,<br>$t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$ | 270  | A                |
| Surge current capability               | $I^2t$     |  | 365  | A <sup>2</sup> s |
| Total power dissipation                | $P_{tot}$  | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$                                | 59   | W                |
| Maximum junction temperature           | $T_{jmax}$ |  | 150  | °C               |

### Positive Boost Diode Protection Diode

|                                 |            |                                       |     |    |
|---------------------------------|------------|---------------------------------------|-----|----|
| Peak repetitive reverse voltage | $V_{RRM}$  |                                       | 650 | V  |
| Forward current (DC current)    | $I_F$      | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 17  | A  |
| Repetitive peak forward current | $I_{FRM}$  | $t_p$ limited by $T_{jmax}$           | 20  | A  |
| Total power dissipation         | $P_{tot}$  | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$ | 33  | W  |
| Maximum junction temperature    | $T_{jmax}$ |                                       | 175 | °C |



Vincotech

10-FY073AA050RG01-LK14L08  
datasheet

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

| Parameter                              | Symbol     | Conditions   | Value | Unit             |
|--|------------|--|-------|------------------|
| <b>Positive Boost Blocking Diode</b>   |            |  |       |                  |
| Peak repetitive reverse voltage        | $V_{RRM}$  |  | 1600  | V                |
| Forward current (DC current)           | $I_F$      | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$                                | 36    | A                |
| Surge (non-repetitive) forward current | $I_{FSM}$  | Single Half Sine Wave,<br>$t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$ | 270   | A                |
| Surge current capability               | $I^2t$     |  | 360   | A <sup>2</sup> s |
| Total power dissipation                | $P_{tot}$  | $T_j = T_{jmax}$ $T_s = 80\text{ °C}$                                | 46    | W                |
| Maximum junction temperature           | $T_{jmax}$ |  | 150   | °C               |

## Capacitor (DC)

|                       |           |  |             |    |
|-----------------------|-----------|--|-------------|----|
| Maximum DC voltage    | $V_{MAX}$ |  | 500         | V  |
| Operation Temperature | $T_{op}$  |  | -55 ... 125 | °C |

## Module Properties

### Thermal Properties

|   |           |  |                            |    |
|---|-----------|--|----------------------------|----|
| Storage temperature                             | $T_{stg}$ |  | -40...+125                 | °C |
| Operation temperature under switching condition | $T_{jop}$ |  | -40...+( $T_{jmax} - 25$ ) | °C |

### Isolation Properties

|                            |            |                                     |         |    |
|----------------------------|------------|-------------------------------------|---------|----|
| Isolation voltage          | $V_{isol}$ | DC Test Voltage* $t_p = 2\text{ s}$ | 6000    | V  |
| Isolation voltage          | $V_{isol}$ | AC Voltage $t_p = 1\text{ min}$     | 2500    | V  |
| Creepage distance          |            |                                     | >12.7mm | mm |
| Clearance                  |            |                                     | 8.58mm  | mm |
| Comparative Tracking Index | CTI        |                                     | ≥ 200   |    |

\*100 % tested in production





Vincotech

## Characteristic Values

| Parameter | Symbol | Conditions |                              |   |                                     |            | Values |     |     | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--------|-----|-----|------|
|           |        |            | $V_{GE}$ [V]<br>$V_{GS}$ [V] | $V_{CE}$ [V]<br>$V_{DS}$ [V]<br>$V_F$ [V] | $I_C$ [A]<br>$I_D$ [A]<br>$I_F$ [A] | $T_j$ [°C] | Min    | Typ | Max |      |

### Negative Neutral Point Switch

#### Static

|                                      |               |                     |    |     |       |                  |   |                    |                    |    |
|--------------------------------------|---------------|---------------------|----|-----|-------|------------------|---|--------------------|--------------------|----|
| Gate-emitter threshold voltage       | $V_{GE(th)}$  |                     |    | 5   | 0,033 | 25               | 5 | 6                  | 7                  | V  |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ |                     | 15 |     | 50    | 25<br>125<br>150 |   | 1,5<br>1,66<br>1,7 | 1,9 <sup>(1)</sup> | V  |
| Collector-emitter cut-off current    | $I_{CES}$     |                     | 0  | 650 |       | 25               |   |                    | 0,01               | mA |
| Gate-emitter leakage current         | $I_{GES}$     |                     | 30 | 0   |       | 25               |   |                    | 0,2                | µA |
| Internal gate resistance             | $r_g$         |                     |    |     |       |                  |   | None               |                    | Ω  |
| Input capacitance                    | $C_{ies}$     | $f = 1 \text{ Mhz}$ | 0  | 30  |       | 25               |   | 4200               |                    | pF |
| Output capacitance                   | $C_{oes}$     |                     |    |     |       |                  |   | 104                |                    | pF |
| Reverse transfer capacitance         | $C_{res}$     |                     |    |     |       |                  |   | 79                 |                    | pF |
| Gate charge                          | $Q_g$         |                     | 15 | 400 | 50    | 25               |   | 141                |                    | nC |

#### Thermal

|  |               |   |  |  |  |  |  |      |  |     |
|--|---------------|---|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink <sup>(2)</sup> | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4 \text{ W/mK}$<br>(PSX) |  |  |  |  |  | 1,23 |  | K/W |
|--|---------------|---|--|--|--|--|--|------|--|-----|

#### Dynamic

|                             |              |   |       |     |    |                  |  |                            |  |     |
|-----------------------------|--------------|---|-------|-----|----|------------------|--|----------------------------|--|-----|
| Turn-on delay time          | $t_{d(on)}$  | $R_{gon} = 8 \Omega$<br>$R_{goff} = 8 \Omega$ | -5/15 | 400 | 50 | 25<br>125<br>150 |  | 95,23<br>87,76<br>85,82    |  | ns  |
| Rise time                   | $t_r$        |   |       |     |    | 25<br>125<br>150 |  | 45,2<br>44,7<br>44,51      |  | ns  |
| Turn-off delay time         | $t_{d(off)}$ |   |       |     |    | 25<br>125<br>150 |  | 139,47<br>155,63<br>160,31 |  | ns  |
| Fall time                   | $t_f$        |   |       |     |    | 25<br>125<br>150 |  | 29,45<br>41,3<br>44,8      |  | ns  |
| Turn-on energy (per pulse)  | $E_{on}$     |   |       |     |    | 25<br>125<br>150 |  | 0,931<br>1,34<br>1,48      |  | mWs |
| Turn-off energy (per pulse) | $E_{off}$    |   |       |     |    | 25<br>125<br>150 |  | 0,84<br>1,11<br>1,18       |  | mWs |



Vincotech

## Characteristic Values

| Parameter | Symbol | Conditions |                              |   |                                     |            | Values |     |     | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--------|-----|-----|------|
|           |        |            | $V_{GE}$ [V]<br>$V_{GS}$ [V] | $V_{CE}$ [V]<br>$V_{DS}$ [V]<br>$V_F$ [V] | $I_C$ [A]<br>$I_D$ [A]<br>$I_F$ [A] | $T_j$ [°C] | Min    | Typ | Max |      |

### Positive Neutral Point Switch

#### Static

|                                      |               |                     |    |     |       |                  |   |                    |                    |    |
|--------------------------------------|---------------|---------------------|----|-----|-------|------------------|---|--------------------|--------------------|----|
| Gate-emitter threshold voltage       | $V_{GE(th)}$  |                     |    | 5   | 0,033 | 25               | 5 | 6                  | 7                  | V  |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ |                     | 15 |     | 50    | 25<br>125<br>150 |   | 1,5<br>1,66<br>1,7 | 1,9 <sup>(1)</sup> | V  |
| Collector-emitter cut-off current    | $I_{CES}$     |                     | 0  | 650 |       | 25               |   |                    | 0,01               | mA |
| Gate-emitter leakage current         | $I_{GES}$     |                     | 30 | 0   |       | 25               |   |                    | 0,2                | μA |
| Internal gate resistance             | $r_g$         |                     |    |     |       |                  |   | None               |                    | Ω  |
| Input capacitance                    | $C_{ies}$     | $f = 1 \text{ Mhz}$ | 0  | 30  | 25    |                  |   | 4200               |                    | pF |
| Output capacitance                   | $C_{oes}$     |                     |    |     |       |                  |   | 104                |                    | pF |
| Reverse transfer capacitance         | $C_{res}$     |                     |    |     |       |                  |   | 79                 |                    | pF |
| Gate charge                          | $Q_g$         |                     | 15 | 400 | 50    | 25               |   | 141                |                    | nC |

#### Thermal

|  |               |   |  |  |  |  |  |      |  |     |
|--|---------------|---|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink <sup>(2)</sup> | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4 \text{ W/mK}$<br>(PSX) |  |  |  |  |  | 1,23 |  | K/W |
|--|---------------|---|--|--|--|--|--|------|--|-----|

#### Dynamic

|                             |              |   |       |     |    |                  |  |                           |  |     |
|-----------------------------|--------------|---|-------|-----|----|------------------|--|---------------------------|--|-----|
| Turn-on delay time          | $t_{d(on)}$  | $R_{gon} = 8 \Omega$<br>$R_{goff} = 8 \Omega$   | -5/15 | 400 | 50 | 25<br>125<br>150 |  | 97,41<br>89,46<br>86,89   |  | ns  |
| Rise time                   | $t_r$        |   |       |     |    | 25<br>125<br>150 |  | 45,18<br>45,16<br>45,85   |  | ns  |
| Turn-off delay time         | $t_{d(off)}$ |   |       |     |    | 25<br>125<br>150 |  | 137,8<br>154,41<br>159,11 |  | ns  |
| Fall time                   | $t_f$        |   |       |     |    | 25<br>125<br>150 |  | 36,74<br>34,76<br>32,99   |  | ns  |
| Turn-on energy (per pulse)  | $E_{on}$     | $Q_{tFWD}=0,429 \mu\text{C}$<br>$Q_{tFWD}=1,58 \mu\text{C}$<br>$Q_{tFWD}=2 \mu\text{C}$ |       |     |    | 25<br>125<br>150 |  | 0,872<br>1,31<br>1,46     |  | mWs |
| Turn-off energy (per pulse) | $E_{off}$    |   |       |     |    | 25<br>125<br>150 |  | 1,38<br>2,04<br>2,24      |  | mWs |



Vincotech

## Characteristic Values

| Parameter | Symbol | Conditions |                              |   |                                     |            | Values |     |     | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--------|-----|-----|------|
|           |        |            | $V_{GE}$ [V]<br>$V_{GS}$ [V] | $V_{CE}$ [V]<br>$V_{DS}$ [V]<br>$V_F$ [V] | $I_C$ [A]<br>$I_D$ [A]<br>$I_F$ [A] | $T_j$ [°C] | Min    | Typ | Max |      |

### Negative Boost Diode

#### Static

|                         |       |               |  |  |    |                  |  |                      |                  |    |
|-------------------------|-------|---------------|--|--|----|------------------|--|----------------------|------------------|----|
| Forward voltage         | $V_F$ |               |  |  | 30 | 25<br>125<br>150 |  | 2,33<br>1,76<br>1,65 | 3 <sup>(1)</sup> | V  |
| Reverse leakage current | $I_R$ | $V_i = 650$ V |  |  |    | 25               |  |                      | 7                | µA |

#### Thermal

|  |               |                                       |  |  |  |  |  |      |  |     |
|--|---------------|---------------------------------------|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink <sup>(2)</sup> | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4$ W/mK<br>(PSX) |  |  |  |  |  | 1,96 |  | K/W |
|--|---------------|---------------------------------------|--|--|--|--|--|------|--|-----|

#### Dynamic

|                                       |                      |   |       |     |    |                  |  |                              |  |      |
|---------------------------------------|----------------------|---|-------|-----|----|------------------|--|------------------------------|--|------|
| Peak recovery current                 | $I_{RRM}$            | $di/dt=1398$ A/µs<br>$di/dt=1424$ A/µs<br>$di/dt=1290$ A/µs | -5/15 | 400 | 50 | 25<br>125<br>150 |  | 19,55<br>35,04<br>39,96      |  | A    |
| Reverse recovery time                 | $t_{rr}$             |   |       |     |    | 25<br>125<br>150 |  | 57,83<br>86,57<br>98,83      |  | ns   |
| Recovered charge                      | $Q_r$                |   |       |     |    | 25<br>125<br>150 |  | 0,437<br>1,61<br>2,04        |  | µC   |
| Reverse recovered energy              | $E_{rec}$            |   |       |     |    | 25<br>125<br>150 |  | 0,096<br>0,381<br>0,486      |  | mWs  |
| Peak rate of fall of recovery current | $(di_{rr}/dt)_{max}$ |   |       |     |    | 25<br>125<br>150 |  | 2204,92<br>952,07<br>1057,36 |  | A/µs |



Vincotech

## Characteristic Values

| Parameter | Symbol | Conditions |                              |   |                                     |            | Values |     |     | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--------|-----|-----|------|
|           |        |            | $V_{GE}$ [V]<br>$V_{GS}$ [V] | $V_{CE}$ [V]<br>$V_{DS}$ [V]<br>$V_F$ [V] | $I_C$ [A]<br>$I_D$ [A]<br>$I_F$ [A] | $T_j$ [°C] | Min    | Typ | Max |      |

### Positive Boost Diode

#### Static

|                         |       |               |  |  |    |                  |  |                      |                  |    |
|-------------------------|-------|---------------|--|--|----|------------------|--|----------------------|------------------|----|
| Forward voltage         | $V_F$ |               |  |  | 30 | 25<br>125<br>150 |  | 2,33<br>1,76<br>1,65 | 3 <sup>(1)</sup> | V  |
| Reverse leakage current | $I_R$ | $V_i = 650$ V |  |  |    | 25               |  |                      | 7                | μA |

#### Thermal

|  |               |                                       |  |  |  |  |  |      |  |     |
|--|---------------|---------------------------------------|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink <sup>(2)</sup> | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4$ W/mK<br>(PSX) |  |  |  |  |  | 1,96 |  | K/W |
|--|---------------|---------------------------------------|--|--|--|--|--|------|--|-----|

#### Dynamic

|                                       |                      |   |       |     |    |                  |  |                              |  |      |
|---------------------------------------|----------------------|---|-------|-----|----|------------------|--|------------------------------|--|------|
| Peak recovery current                 | $I_{RRM}$            | $di/dt=1385$ A/μs<br>$di/dt=1466$ A/μs<br>$di/dt=1348$ A/μs | -5/15 | 400 | 50 | 25<br>125<br>150 |  | 20,19<br>36,15<br>40,92      |  | A    |
| Reverse recovery time                 | $t_{rr}$             |   |       |     |    | 25<br>125<br>150 |  | 44,97<br>83,1<br>94,81       |  | ns   |
| Recovered charge                      | $Q_r$                |   |       |     |    | 25<br>125<br>150 |  | 0,429<br>1,58<br>2           |  | μC   |
| Reverse recovered energy              | $E_{rec}$            |   |       |     |    | 25<br>125<br>150 |  | 0,095<br>0,386<br>0,485      |  | mWs  |
| Peak rate of fall of recovery current | $(di_{rr}/dt)_{max}$ |   |       |     |    | 25<br>125<br>150 |  | 563,19<br>1064,32<br>1164,61 |  | A/μs |



Vincotech

## Characteristic Values

| Parameter | Symbol | Conditions |                              |   |                                     |            |  | Values |     |     | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--|--------|-----|-----|------|
|           |        |            | $V_{GE}$ [V]<br>$V_{GS}$ [V] | $V_{CE}$ [V]<br>$V_{DS}$ [V]<br>$V_F$ [V] | $I_C$ [A]<br>$I_D$ [A]<br>$I_F$ [A] | $T_j$ [°C] |  | Min    | Typ | Max |      |

### Negative Neutral Point Diode

#### Static

|                         |       |                |  |  |    |                  |  |              |  |    |
|-------------------------|-------|----------------|--|--|----|------------------|--|--------------|--|----|
| Forward voltage         | $V_F$ |                |  |  | 30 | 25<br>125<br>150 |  | 1,24<br>1,22 | 1,29 <sup>(1)</sup><br>1,26 <sup>(1)</sup> | V  |
| Reverse leakage current | $I_R$ | $V_i = 1600$ V |  |  |    | 25<br>150        |  |              | 10<br>1                                    | μA |

#### Thermal

|  |               |                                    |  |  |  |  |  |      |  |     |
|--|---------------|------------------------------------|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink <sup>(2)</sup> | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4$ W/mK (PSX) |  |  |  |  |  | 1,51 |  | K/W |
|--|---------------|------------------------------------|--|--|--|--|--|------|--|-----|

### Positive Neutral Point Diode

#### Static

|                         |       |                |  |  |    |                  |  |              |   |    |
|-------------------------|-------|----------------|--|--|----|------------------|--|--------------|---|----|
| Forward voltage         | $V_F$ |                |  |  | 50 | 25<br>125<br>150 |  | 1,27<br>1,27 | 1,3 <sup>(1)</sup><br>1,37 <sup>(1)</sup> | V  |
| Reverse leakage current | $I_R$ | $V_i = 1600$ V |  |  |    | 25<br>150        |  |              | 20<br>1500                                | μA |

#### Thermal

|  |               |                                    |  |  |  |  |  |      |  |     |
|--|---------------|------------------------------------|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink <sup>(2)</sup> | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4$ W/mK (PSX) |  |  |  |  |  | 1,19 |  | K/W |
|--|---------------|------------------------------------|--|--|--|--|--|------|--|-----|



Vincotech

## Characteristic Values

| Parameter | Symbol | Conditions |                              |   |                                     |            |  | Values |     |     | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--|--------|-----|-----|------|
|           |        |            | $V_{GE}$ [V]<br>$V_{GS}$ [V] | $V_{CE}$ [V]<br>$V_{DS}$ [V]<br>$V_F$ [V] | $I_C$ [A]<br>$I_D$ [A]<br>$I_F$ [A] | $T_j$ [°C] |  | Min    | Typ | Max |      |

### Positive Boost Diode Protection Diode

#### Static

|                         |       |               |  |  |    |           |  |      |              |                     |    |
|-------------------------|-------|---------------|--|--|----|-----------|--|------|--------------|---------------------|----|
| Forward voltage         | $V_F$ |               |  |  | 10 | 25<br>125 |  | 1,23 | 1,67<br>1,56 | 1,87 <sup>(1)</sup> | V  |
| Reverse leakage current | $I_R$ | $V_r = 650$ V |  |  |    | 25        |  |      |              | 0,14                | μA |

#### Thermal

|  |               |                                       |  |  |  |  |  |  |      |  |     |
|--|---------------|---------------------------------------|--|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink <sup>(2)</sup> | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4$ W/mK<br>(PSX) |  |  |  |  |  |  | 2,87 |  | K/W |
|--|---------------|---------------------------------------|--|--|--|--|--|--|------|--|-----|

### Positive Boost Blocking Diode

#### Static

|                         |       |                |  |  |    |                  |  |              |  |         |    |
|-------------------------|-------|----------------|--|--|----|------------------|--|--------------|--|---------|----|
| Forward voltage         | $V_F$ |                |  |  | 30 | 25<br>125<br>150 |  | 1,24<br>1,22 | 1,29 <sup>(1)</sup><br>1,26 <sup>(1)</sup> |         | V  |
| Reverse leakage current | $I_R$ | $V_r = 1600$ V |  |  |    | 25<br>150        |  |              |  | 10<br>1 | μA |

#### Thermal

|  |               |                                       |  |  |  |  |  |  |      |  |     |
|--|---------------|---------------------------------------|--|--|--|--|--|--|------|--|-----|
| Thermal resistance junction to sink <sup>(2)</sup> | $R_{th(j-s)}$ | $\lambda_{paste} = 3,4$ W/mK<br>(PSX) |  |  |  |  |  |  | 1,51 |  | K/W |
|--|---------------|---------------------------------------|--|--|--|--|--|--|------|--|-----|

### Capacitor (DC)

#### Static

|                    |     |                          |  |  |  |    |     |     |    |  |    |
|--------------------|-----|--------------------------|--|--|--|----|-----|-----|----|--|----|
| Capacitance        | $C$ | DC bias voltage =<br>0 V |  |  |  | 25 |     | 150 |    |  | nF |
| Tolerance          |     |                          |  |  |  |    | -10 |     | 10 |  | %  |
| Dissipation factor |     | $f = 1$ kHz              |  |  |  | 25 |     | 2,5 |    |  | %  |



Vincotech

## Characteristic Values

| Parameter | Symbol | Conditions |                              |   |                                     |            | Values |     |     | Unit |
|-----------|--------|------------|------------------------------|---|-------------------------------------|------------|--------|-----|-----|------|
|           |        |            | $V_{GE}$ [V]<br>$V_{GS}$ [V] | $V_{CE}$ [V]<br>$V_{DS}$ [V]<br>$V_F$ [V] | $I_C$ [A]<br>$I_D$ [A]<br>$I_F$ [A] | $T_j$ [°C] | Min    | Typ | Max |      |

### Thermistor

#### Static

|                                |                |                         |  |  |  |     |    |      |   |      |
|--------------------------------|----------------|-------------------------|--|--|--|-----|----|------|---|------|
| Rated resistance               | $R$            |                         |  |  |  | 25  |    | 22   |   | kΩ   |
| Deviation of $R_{100}$         | $\Delta_{R/R}$ | $R_{100} = 1484 \Omega$ |  |  |  | 100 | -5 |      | 5 | %    |
| Power dissipation              | $P$            |                         |  |  |  | 25  |    | 130  |   | mW   |
| Power dissipation constant     | $d$            |                         |  |  |  | 25  |    | 1,5  |   | mW/K |
| B-value                        | $B_{(25/50)}$  | Tol. $\pm 1 \%$         |  |  |  |     |    | 3962 |   | K    |
| B-value                        | $B_{(25/100)}$ | Tol. $\pm 1 \%$         |  |  |  |     |    | 4000 |   | K    |
| Vincotech Thermistor Reference |                |                         |  |  |  |     |    |      | I |      |

<sup>(1)</sup> Value at chip level

<sup>(2)</sup> Only valid with pre-applied Vincotech thermal interface material.



Vincotech

# 10-FY073AA050RG01-LK14L08


datasheet

## Negative Neutral Point Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_c = f(V_{CE})$$

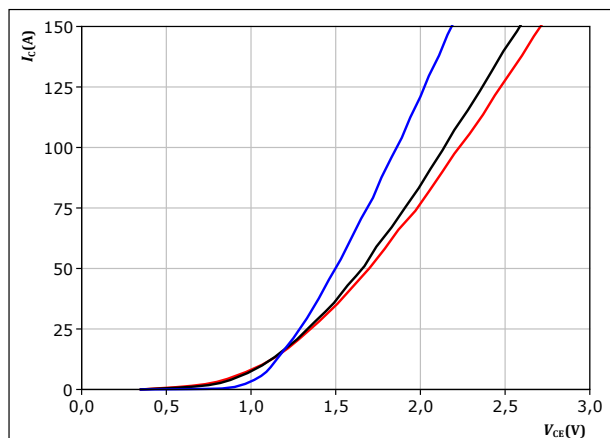


$t_p = 250 \mu s$   
 $V_{GE} = 15 V$

$T_j$ : 25 °C  
125 °C  
150 °C

figure 2. IGBT

Typical output characteristics

$$I_c = f(V_{CE})$$

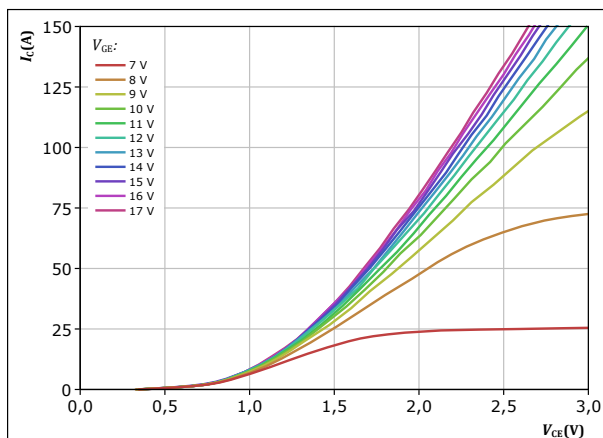


$t_p = 250 \mu s$   
 $T_j = 150 ^\circ C$   
 $V_{GE}$  from 7 V to 17 V in steps of 1 V

figure 3. IGBT

Typical transfer characteristics

$$I_c = f(V_{GE})$$

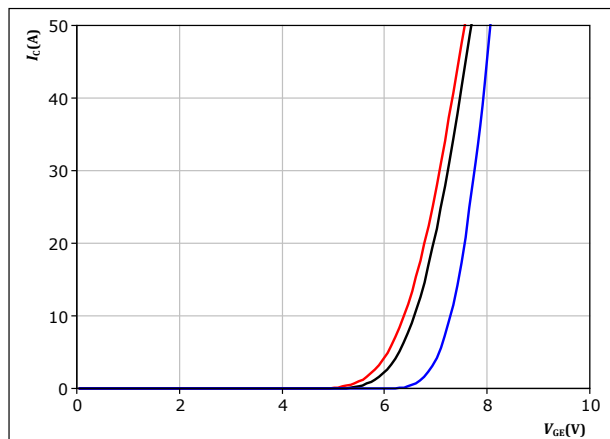


$t_p = 250 \mu s$   
 $V_{CE} = 10 V$

$T_j$ : 25 °C  
125 °C  
150 °C

figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

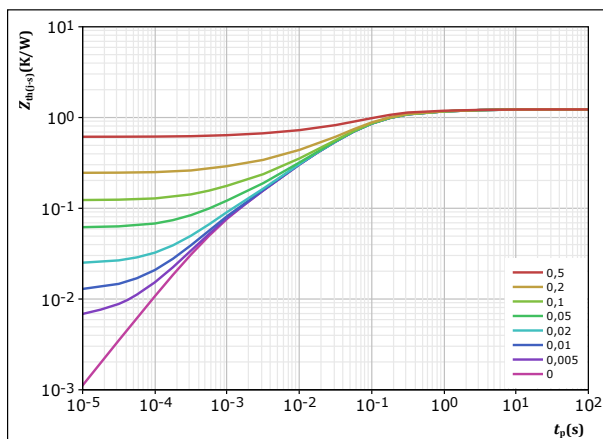

$D = t_p / T$   
 $R_{th(j-s)} = 1,228 K/W$   
IGBT thermal model values  

| $R (K/W)$ | $\tau (s)$ |
|-----------|------------|
| 5,07E-02  | 3,25E+00   |
| 1,43E-01  | 5,26E-01   |
| 5,97E-01  | 9,03E-02   |
| 2,58E-01  | 2,71E-02   |
| 1,27E-01  | 5,65E-03   |
| 5,33E-02  | 7,25E-04   |





Vincotech


**10-FY073AA050RG01-LK14L08**  
datasheet

## Negative Neutral Point Switch Characteristics

**figure 5.** IGBT

Safe operating area

$$I_C = f(V_{CE})$$

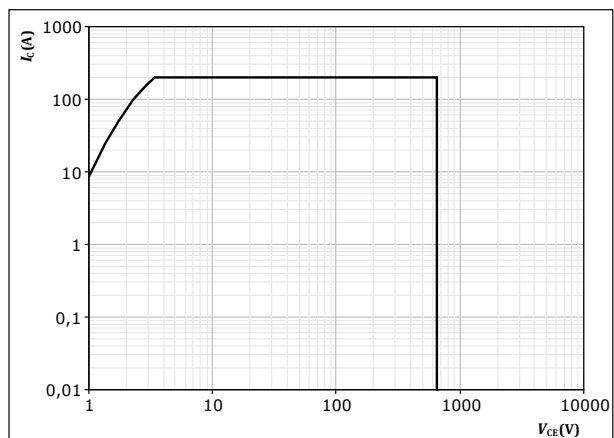

$D =$  single pulse

$T_s = 80$  °C

$V_{GE} = 15$  V

$T_j = T_{jmax}$



Vincotech

# 10-FY073AA050RG01-LK14L08


datasheet

## Positive Neutral Point Switch Characteristics

figure 6. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

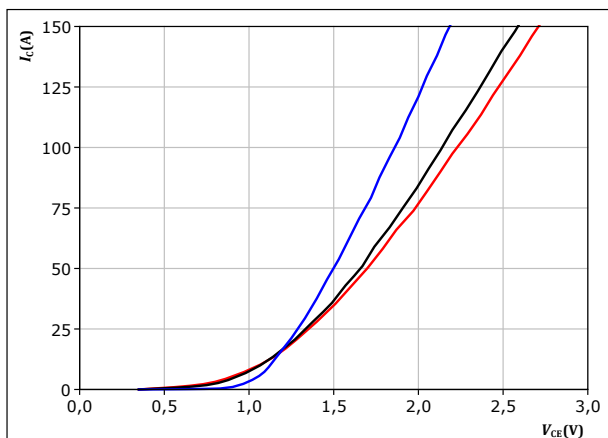


$t_p = 250 \mu s$   
 $V_{GE} = 15 V$   
 $T_j$ : 25 °C, 125 °C, 150 °C

figure 7. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

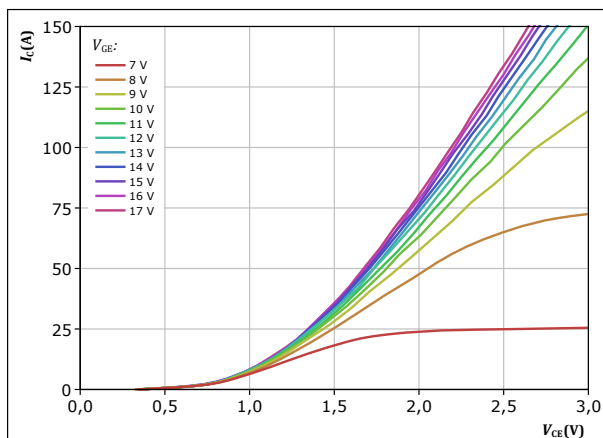


$t_p = 250 \mu s$   
 $T_j = 150 \text{ } ^\circ C$   
 $V_{GE}$  from 7 V to 17 V in steps of 1 V

figure 8. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

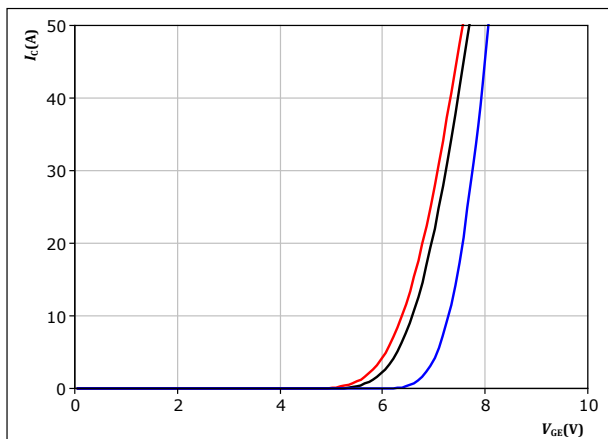


$t_p = 250 \mu s$   
 $V_{CE} = 10 V$   
 $T_j$ : 25 °C, 125 °C, 150 °C

figure 9. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

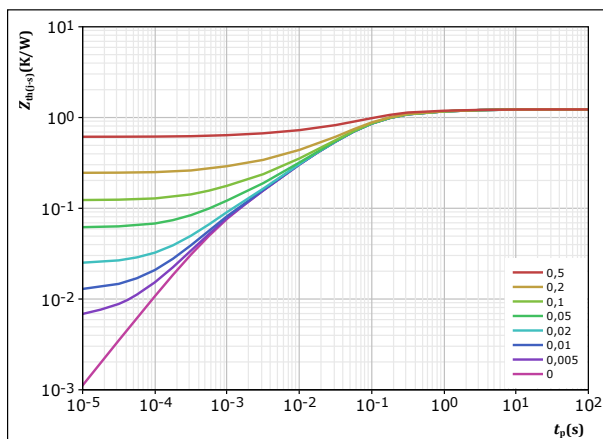

$D = 1.228$   
 $R_{th(j-s)} = 1.228 K/W$   
IGBT thermal model values  

| $R (K/W)$ | $\tau (s)$ |
|-----------|------------|
| 5,07E-02  | 3,25E+00   |
| 1,43E-01  | 5,26E-01   |
| 5,97E-01  | 9,03E-02   |
| 2,58E-01  | 2,71E-02   |
| 1,27E-01  | 5,65E-03   |
| 5,33E-02  | 7,25E-04   |



Vincotech


**10-FY073AA050RG01-LK14L08**  
datasheet

## Positive Neutral Point Switch Characteristics

**figure 10.** IGBT

Safe operating area

$$I_C = f(V_{CE})$$

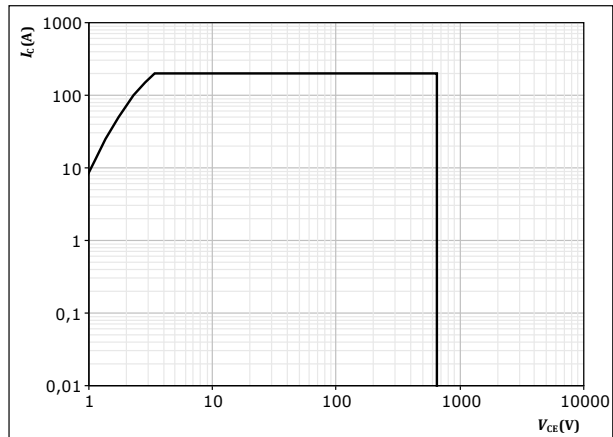

$D = \text{single pulse}$

$T_s = 80 \text{ } ^\circ\text{C}$

$V_{GE} = 15 \text{ V}$

$T_j = T_{jmax}$



Vincotech

## Negative Boost Diode Characteristics

figure 11.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$


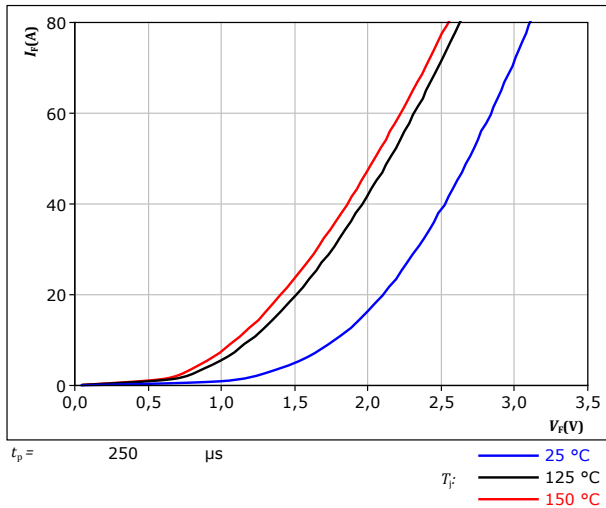


figure 12.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

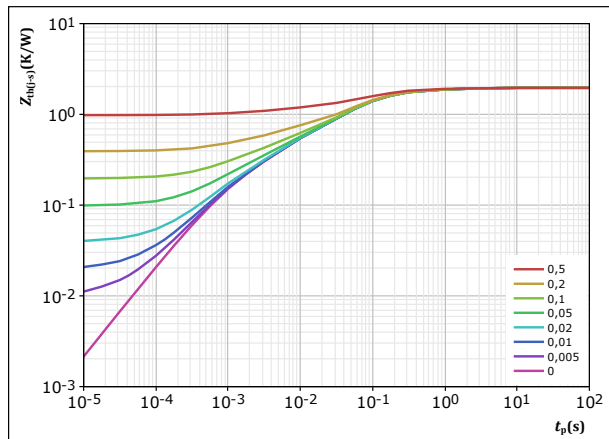

|                          |            |
|--------------------------|------------|
| $D =$                    | $t_p / T$  |
| $R_{th(j-s)} =$          | 1,96 K/W   |
| FWD thermal model values |            |
| $R$ (K/W)                | $\tau$ (s) |
| 1,16E-01                 | 2,07E+00   |
| 3,73E-01                 | 2,36E-01   |
| 1,04E+00                 | 6,08E-02   |
| 3,05E-01                 | 5,87E-03   |
| 1,23E-01                 | 8,48E-04   |



Vincotech

## Positive Boost Diode Characteristics

figure 13.

FWD

Typical forward characteristics

$$I_F = f(V_F)$$


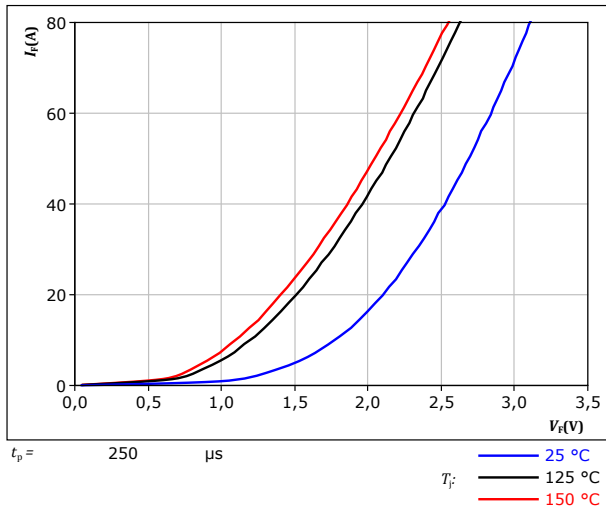


figure 14.

FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

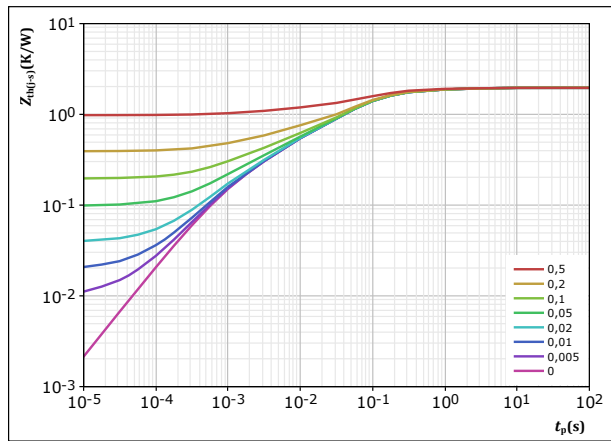

|                          |            |
|--------------------------|------------|
| $D =$                    | $t_p / T$  |
| $R_{th(j-s)} =$          | 1,96 K/W   |
| FWD thermal model values |            |
| $R$ (K/W)                | $\tau$ (s) |
| 1,16E-01                 | 2,07E+00   |
| 3,73E-01                 | 2,36E-01   |
| 1,04E+00                 | 6,08E-02   |
| 3,05E-01                 | 5,87E-03   |
| 1,23E-01                 | 8,48E-04   |



Vincotech

10-FY073AA050RG01-LK14L08  
datasheet

## Negative Neutral Point Diode Characteristics

figure 15. Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$


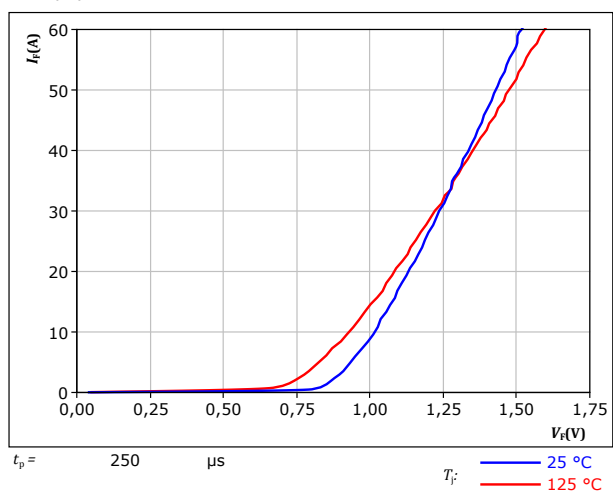


figure 16. Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

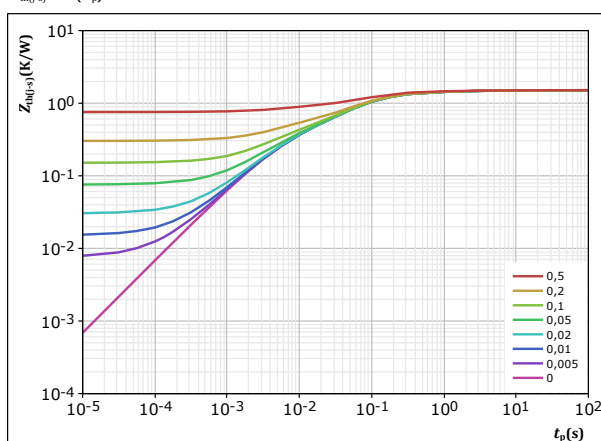

|                                |            |     |
|--------------------------------|------------|-----|
| $D =$                          | $t_p / T$  |     |
| $R_{th(j-s)} =$                | 1,511      | K/W |
| Rectifier thermal model values |            |     |
| $R$ (K/W)                      | $\tau$ (s) |     |
| 3,93E-02                       | 9,06E+00   |     |
| 1,22E-01                       | 9,78E-01   |     |
| 5,85E-01                       | 1,29E-01   |     |
| 5,38E-01                       | 3,98E-02   |     |
| 2,27E-01                       | 4,50E-03   |     |



Vincotech

## Positive Neutral Point Diode Characteristics

figure 17.

Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$


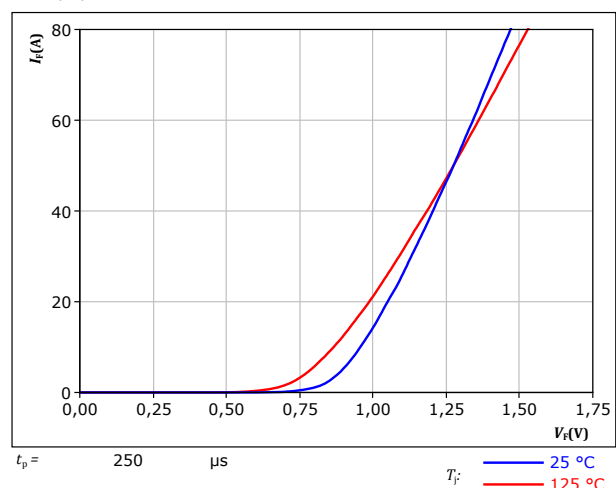


figure 18.

Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

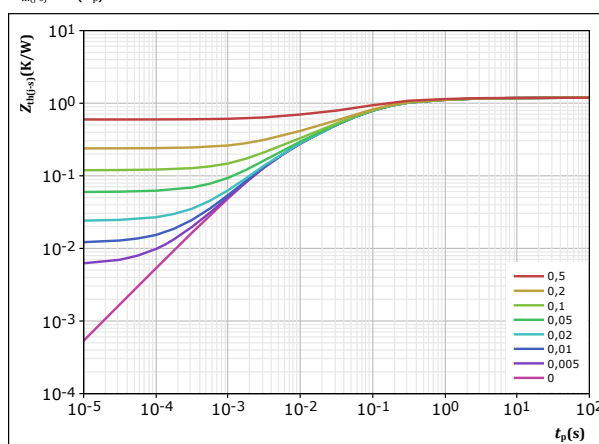

|                                |            |     |
|--------------------------------|------------|-----|
| $D =$                          | $t_p / T$  |     |
| $R_{th(j-s)} =$                | 1,192      | K/W |
| Rectifier thermal model values |            |     |
| $R$ (K/W)                      | $\tau$ (s) |     |
| 2,46E-02                       | 2,42E+01   |     |
| 1,39E-01                       | 1,10E+00   |     |
| 5,40E-01                       | 1,24E-01   |     |
| 3,49E-01                       | 2,80E-02   |     |
| 1,41E-01                       | 3,85E-03   |     |



Vincotech

# 10-FY073AA050RG01-LK14L08

datasheet

## Positive Boost Diode Protection Diode Characteristics

figure 19. FWD

Typical forward characteristics

$$I_F = f(V_F)$$


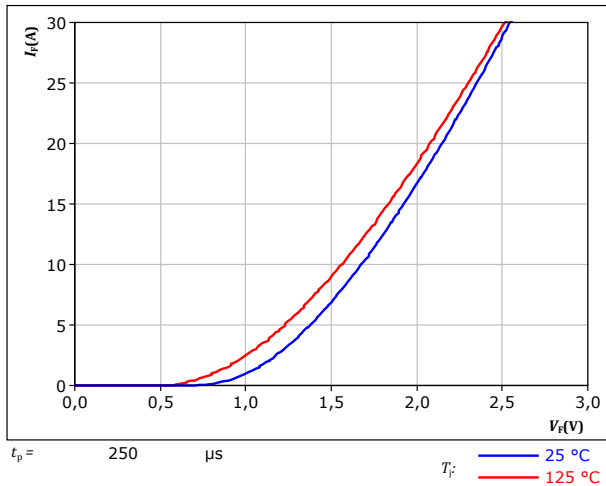


figure 20. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

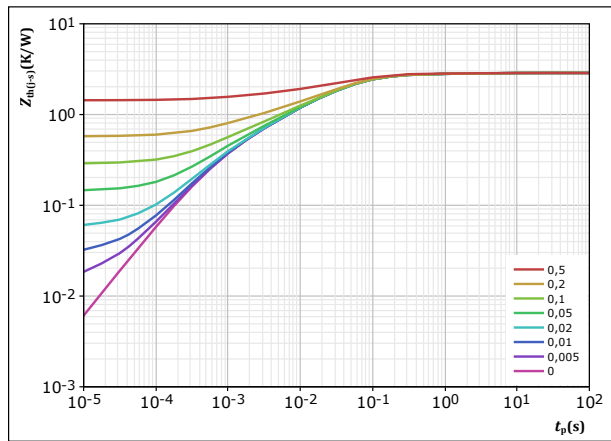

|                          |            |     |
|--------------------------|------------|-----|
| $D =$                    | $t_p / T$  |     |
| $R_{th(j-s)} =$          | 2,873      | K/W |
| FWD thermal model values |            |     |
| $R$ (K/W)                | $\tau$ (s) |     |
| 6,53E-02                 | 3,94E+00   |     |
| 1,48E-01                 | 4,48E-01   |     |
| 1,31E+00                 | 5,96E-02   |     |
| 7,32E-01                 | 1,36E-02   |     |
| 4,04E-01                 | 2,79E-03   |     |
| 2,11E-01                 | 5,37E-04   |     |





Vincotech

10-FY073AA050RG01-LK14L08  
datasheet

## Positive Boost Blocking Diode Characteristics

figure 21.

Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$


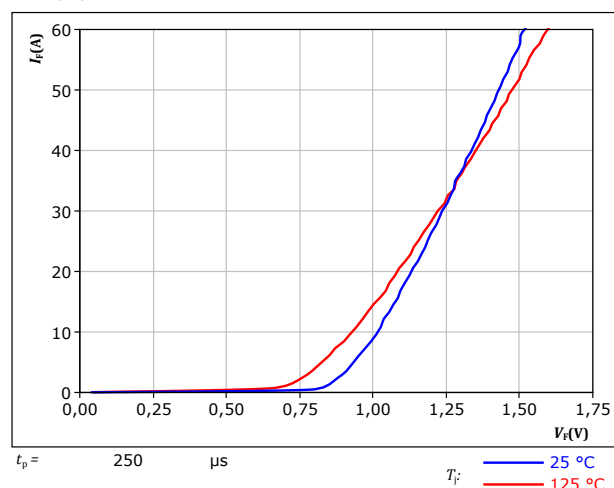


figure 22.

Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

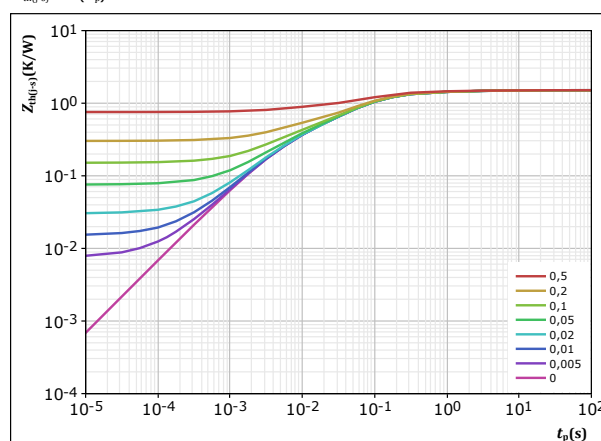

|                                |            |     |
|--------------------------------|------------|-----|
| $D =$                          | $t_p / T$  |     |
| $R_{th(j-s)} =$                | 1,511      | K/W |
| Rectifier thermal model values |            |     |
| $R$ (K/W)                      | $\tau$ (s) |     |
| 3,93E-02                       | 9,06E+00   |     |
| 1,22E-01                       | 9,78E-01   |     |
| 5,85E-01                       | 1,29E-01   |     |
| 5,38E-01                       | 3,98E-02   |     |
| 2,27E-01                       | 4,50E-03   |     |



Vincotech


**10-FY073AA050RG01-LK14L08**  
datasheet

## Thermistor Characteristics

**figure 23.** Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

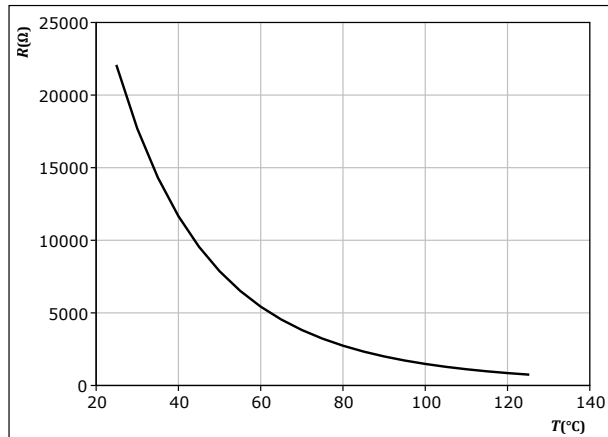



Vincotech


10-FY073AA050RG01-LK14L08  
datasheet

## Negative Neutral Point Switching Characteristics

figure 24. IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_c)$$

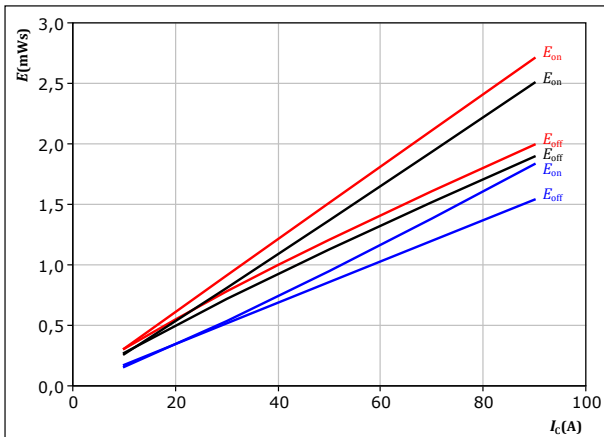

With an inductive load at


$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $R_{gon} = 8 \text{ } \Omega$   
 $R_{goff} = 8 \text{ } \Omega$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 25. IGBT

Typical switching energy losses as a function of gate resistor

$$E = f(R_g)$$

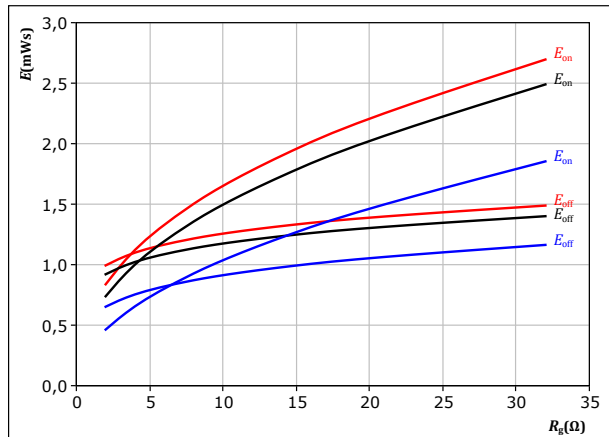

With an inductive load at


$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $I_c = 50 \text{ A}$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 26. FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_c)$$

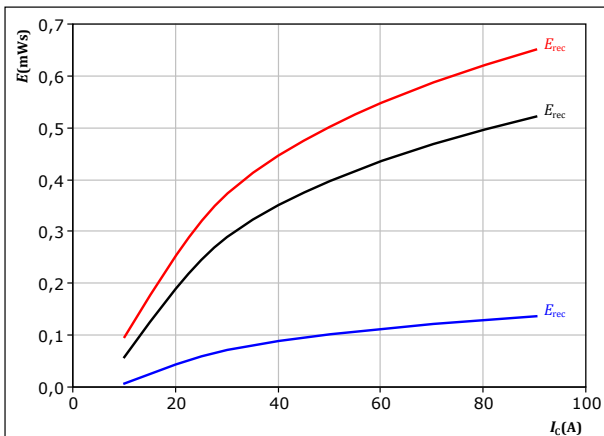

With an inductive load at


$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $R_{gon} = 8 \text{ } \Omega$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 27. FWD

Typical reverse recovered energy loss as a function of gate resistor

$$E_{rec} = f(R_g)$$

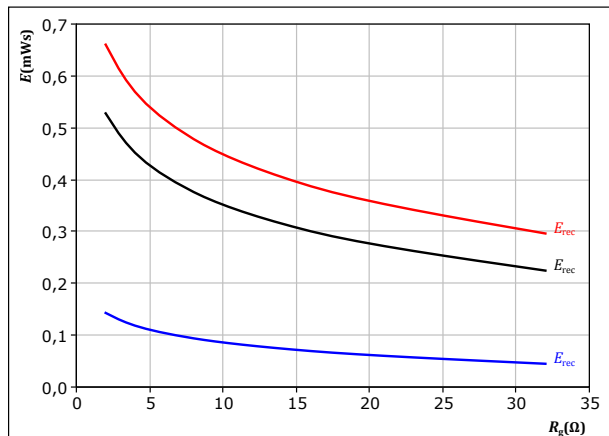

With an inductive load at

$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $I_c = 50 \text{ A}$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C



Vincotech


10-FY073AA050RG01-LK14L08  
datasheet

## Negative Neutral Point Switching Characteristics

figure 28.

IGBT

Typical switching times as a function of collector current  
 $t = f(I_C)$

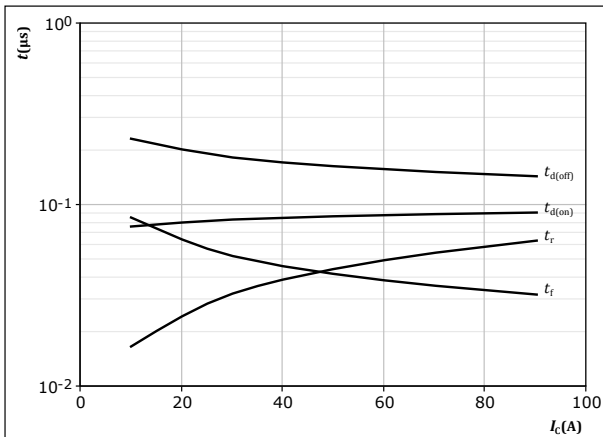


With an inductive load at

$T_j = 150$  °C  
 $V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $R_{gon} = 8$  Ω  
 $R_{goff} = 8$  Ω

figure 29.

IGBT

Typical switching times as a function of gate resistor  
 $t = f(R_g)$

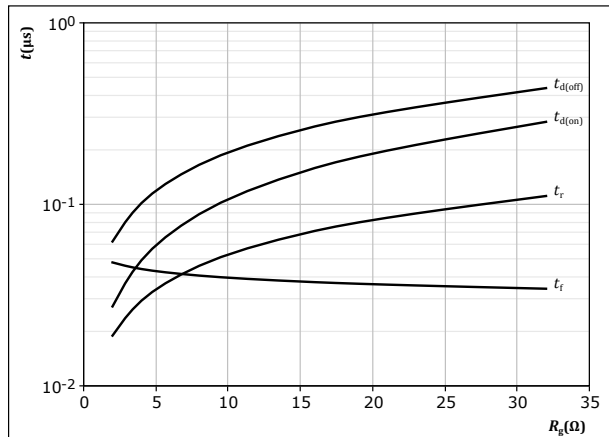


With an inductive load at

$T_j = 150$  °C  
 $V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $I_C = 50$  A

figure 30.

FWD

Typical reverse recovery time as a function of collector current  
 $t_{rr} = f(I_C)$

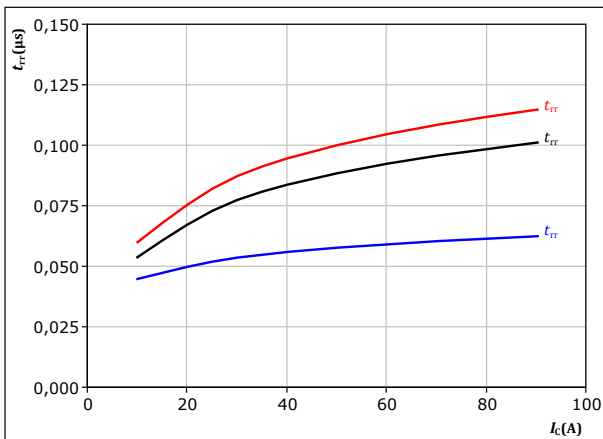

With an inductive load at


$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $R_{gon} = 8$  Ω

$T_j$ : 25 °C (blue)  
125 °C (black)  
150 °C (red)

figure 31.

FWD

Typical reverse recovery time as a function of IGBT turn off gate resistor  
 $t_{rr} = f(R_{goff})$

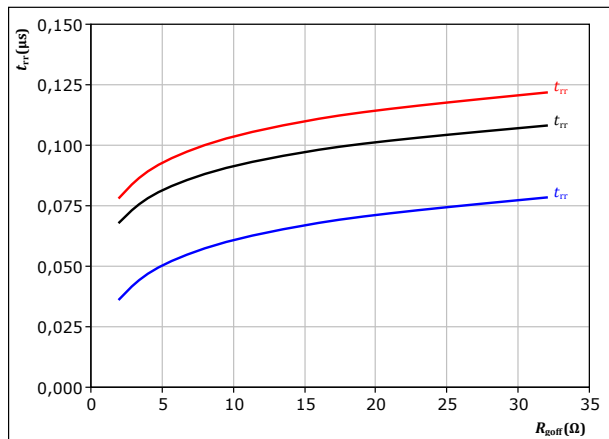

With an inductive load at

$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $I_C = 50$  A

$T_j$ : 25 °C (blue)  
125 °C (black)  
150 °C (red)



Vincotech

10-FY073AA050RG01-LK14L08  
datasheet


## Negative Neutral Point Switching Characteristics

figure 32.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

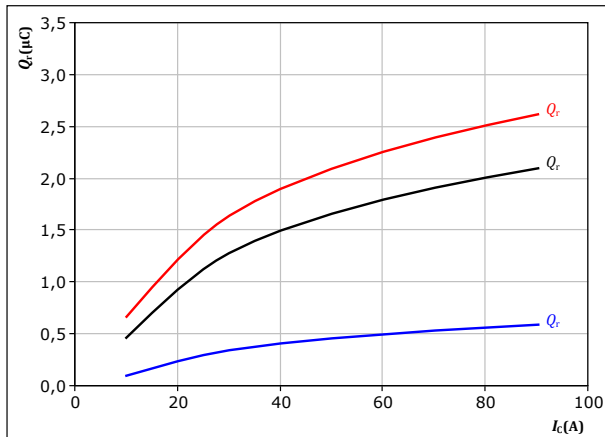

With an inductive load at

$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $R_{gon} = 8$  Ω


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 33.

FWD

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

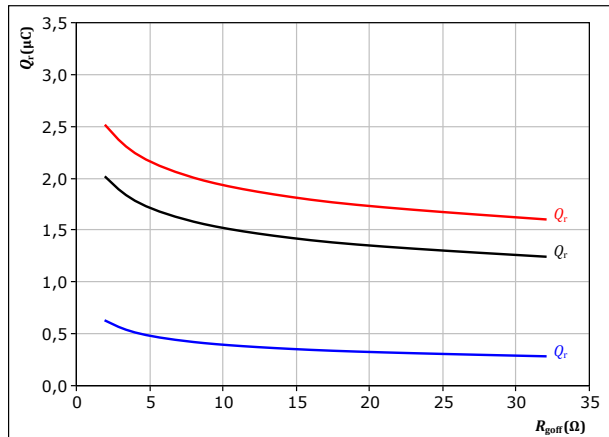

With an inductive load at

$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $I_c = 50$  A


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 34.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

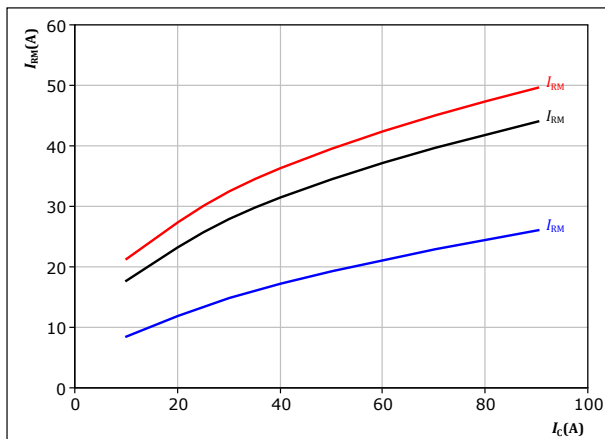

With an inductive load at

$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $R_{gon} = 8$  Ω


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 35.

FWD

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

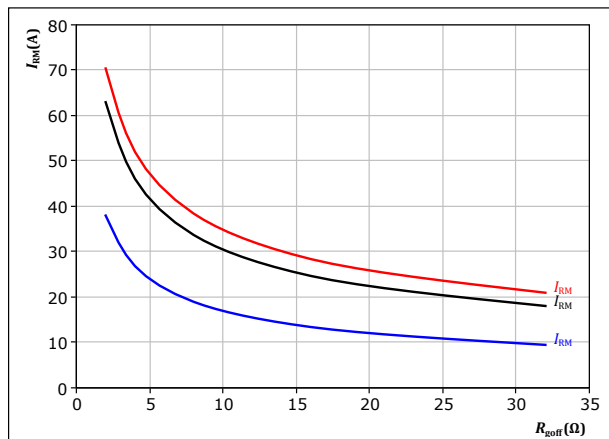

With an inductive load at

$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $I_c = 50$  A

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C




Vincotech

10-FY073AA050RG01-LK14L08  
datasheet

## Negative Neutral Point Switching Characteristics

figure 36. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current  
 $di_f/dt, di_r/dt = f(I_C)$

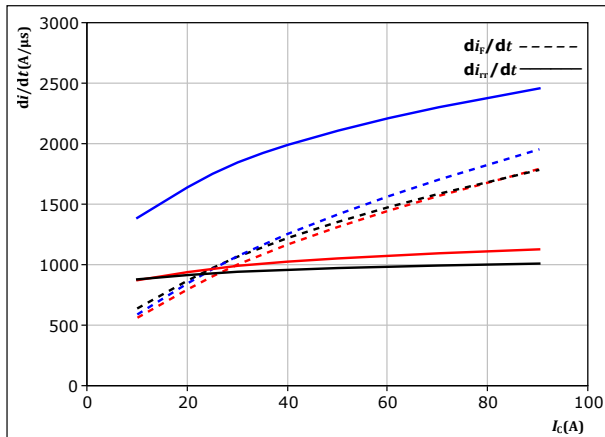


With an inductive load at

$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $R_{goff} = 8 \text{ } \Omega$

$T_j$ : 25 °C  
125 °C  
150 °C

figure 37. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor  
 $di_f/dt, di_r/dt = f(R_{goff})$

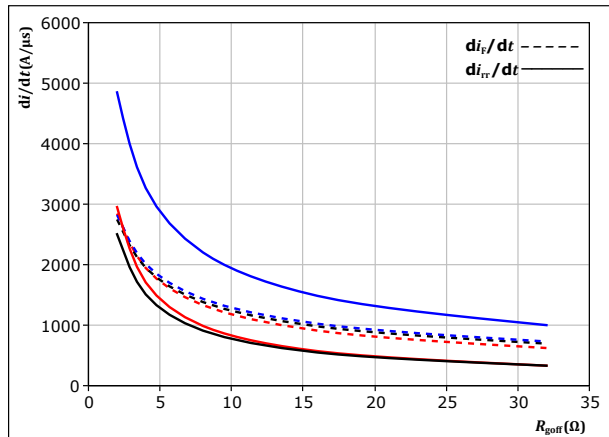

With an inductive load at


$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $I_C = 50 \text{ A}$

$T_j$ : 25 °C  
125 °C  
150 °C

figure 38. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

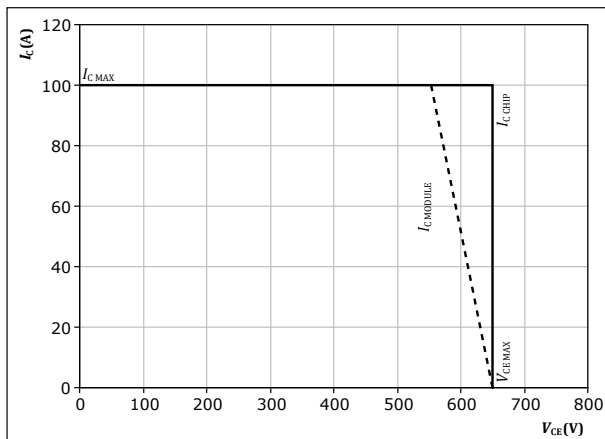

At  $T_j = 150 \text{ } ^\circ\text{C}$   
 $R_{goff} = 8 \text{ } \Omega$   
 $R_{goff} = 8 \text{ } \Omega$



Vincotech

# 10-FY073AA050RG01-LK14L08

datasheet


## Positive Neutral Point Switching Characteristics

figure 39.

IGBT

Typical switching energy losses as a function of collector current

$$E = f(I_C)$$

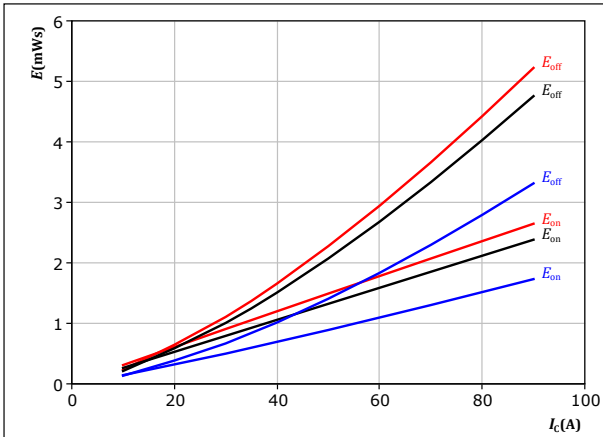

With an inductive load at

$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $R_{gon} = 8 \text{ } \Omega$   
 $R_{goff} = 8 \text{ } \Omega$


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 40.

IGBT

Typical switching energy losses as a function of gate resistor

$$E = f(R_g)$$

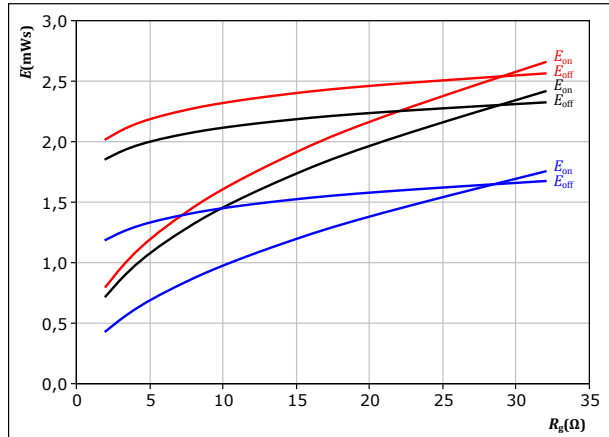

With an inductive load at

$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $I_C = 50 \text{ A}$


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 41.

FWD

Typical reverse recovered energy loss as a function of collector current

$$E_{rec} = f(I_C)$$

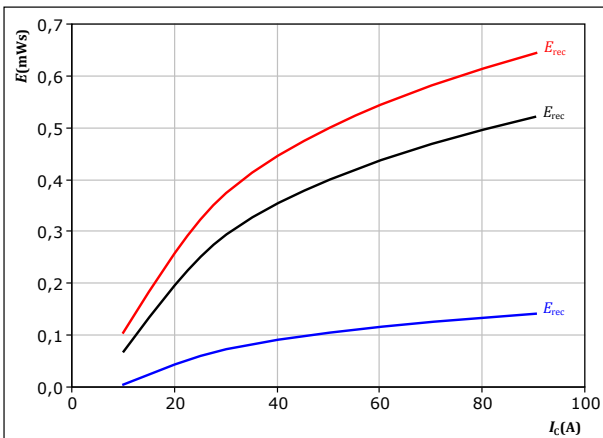

With an inductive load at

$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $R_{gon} = 8 \text{ } \Omega$


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 42.

FWD

Typical reverse recovered energy loss as a function of gate resistor

$$E_{rec} = f(R_g)$$

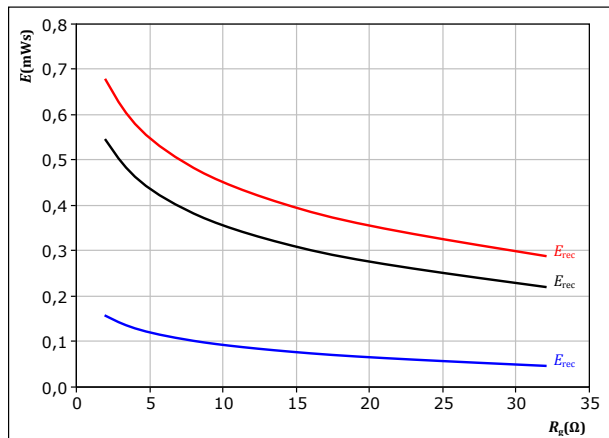

With an inductive load at

$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $I_C = 50 \text{ A}$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C



Vincotech

10-FY073AA050RG01-LK14L08  
datasheet


## Positive Neutral Point Switching Characteristics

figure 43.

IGBT

Typical switching times as a function of collector current

$$t = f(I_C)$$

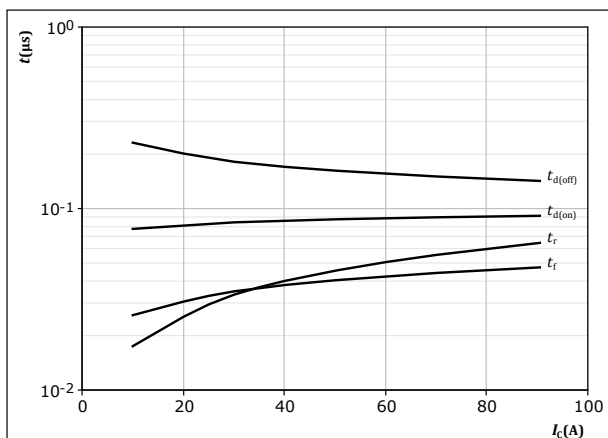

With an inductive load at


$T_j = 150$  °C  
 $V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $R_{gon} = 8$  Ω  
 $R_{goff} = 8$  Ω

figure 44.

IGBT

Typical switching times as a function of gate resistor

$$t = f(R_g)$$

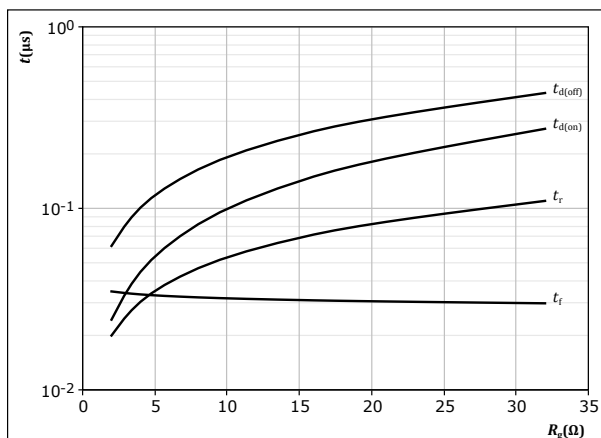

With an inductive load at


$T_j = 150$  °C  
 $V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $I_C = 50$  A

figure 45.

FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_C)$$

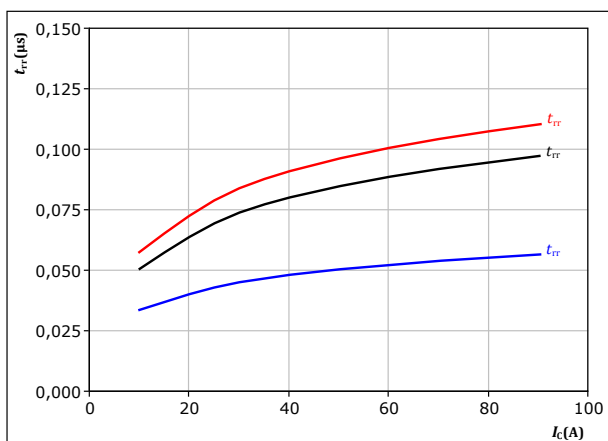

With an inductive load at

$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $R_{gon} = 8$  Ω


$T_j$ : 25 °C  
125 °C  
150 °C

figure 46.

FWD

Typical reverse recovery time as a function of IGBT turn off gate resistor

$$t_{rr} = f(R_{goff})$$

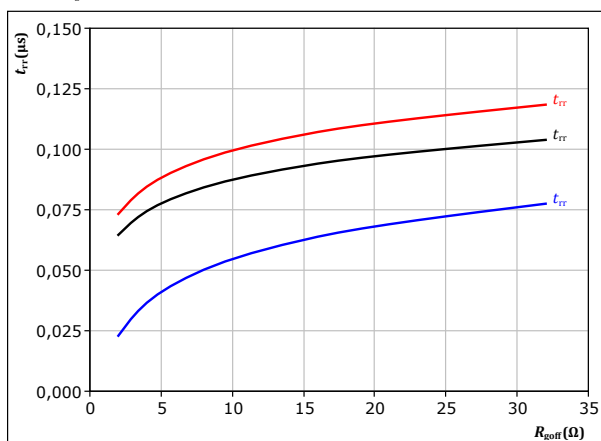

With an inductive load at

$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $I_C = 50$  A

$T_j$ : 25 °C  
125 °C  
150 °C





Vincotech

10-FY073AA050RG01-LK14L08  
datasheet


## Positive Neutral Point Switching Characteristics

figure 47.

FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

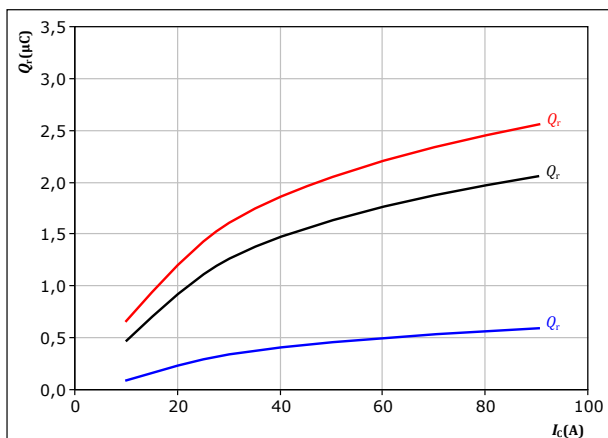

With an inductive load at

$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $R_{gon} = 8$  Ω


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 49.

FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

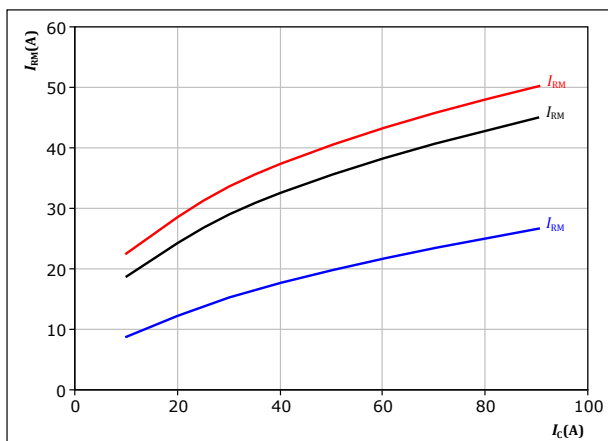

With an inductive load at

$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $R_{gon} = 8$  Ω


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 48.

FWD

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

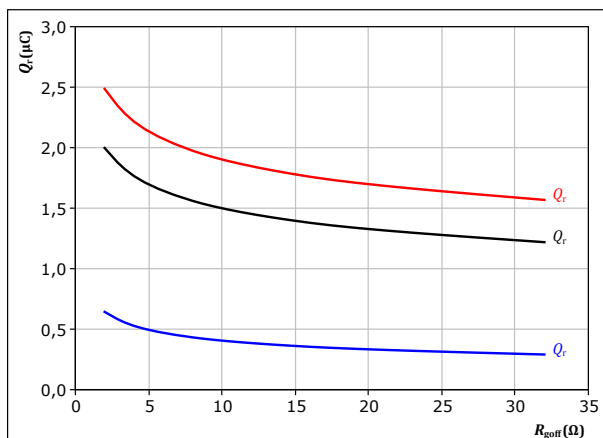

With an inductive load at

$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $I_c = 50$  A


$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 50.

FWD

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

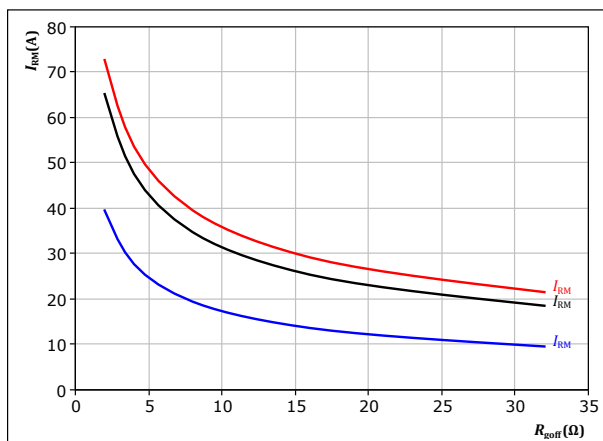

With an inductive load at

$V_{CE} = 400$  V  
 $V_{GE} = -5/15$  V  
 $I_c = 50$  A

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C




Vincotech

10-FY073AA050RG01-LK14L08  
datasheet

## Positive Neutral Point Switching Characteristics

figure 51. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current  
 $di_f/dt, di_r/dt = f(I_C)$

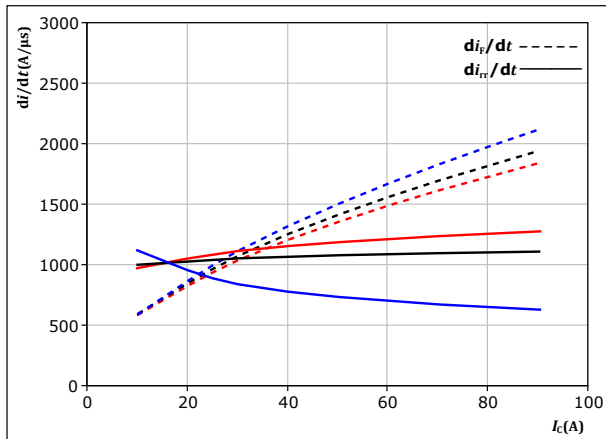


With an inductive load at

$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $R_{gon} = 8 \text{ } \Omega$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 52. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor  
 $di_f/dt, di_r/dt = f(R_{goff})$

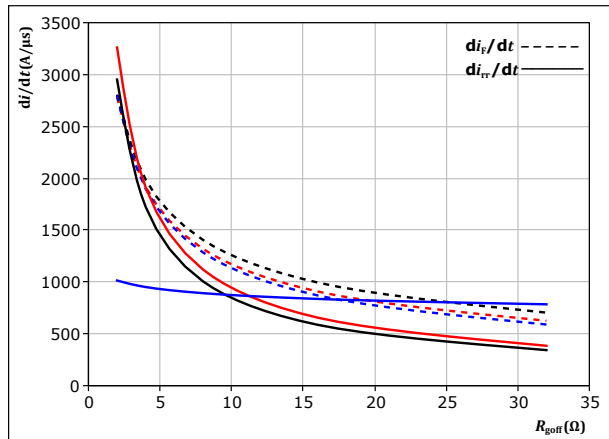

With an inductive load at


$V_{CE} = 400 \text{ V}$   
 $V_{GE} = -5/15 \text{ V}$   
 $I_C = 50 \text{ A}$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 53. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

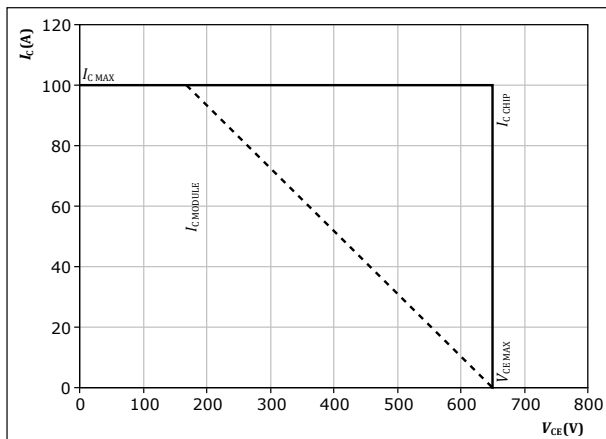

At  $T_j = 150 \text{ } ^\circ\text{C}$   
 $R_{gon} = 8 \text{ } \Omega$   
 $R_{goff} = 8 \text{ } \Omega$



Vincotech

## Switching Definitions

figure 54. IGBT

Turn-off Switching Waveforms & definition of  $t_{doff}$ ,  $t_{Eoff}$  ( $t_{Eoff}$  = integrating time for  $E_{off}$ )

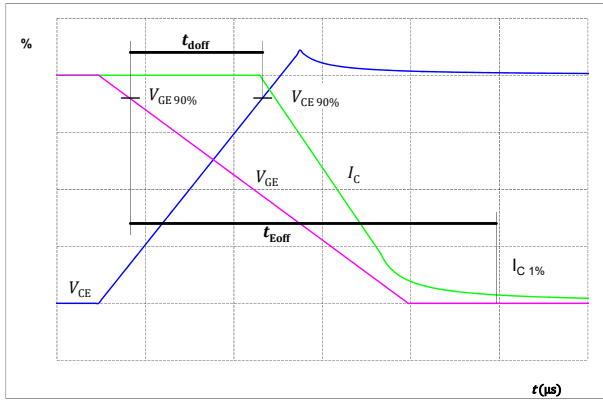


figure 55. IGBT

Turn-on Switching Waveforms & definition of  $t_{don}$ ,  $t_{Eon}$  ( $t_{Eon}$  = integrating time for  $E_{on}$ )

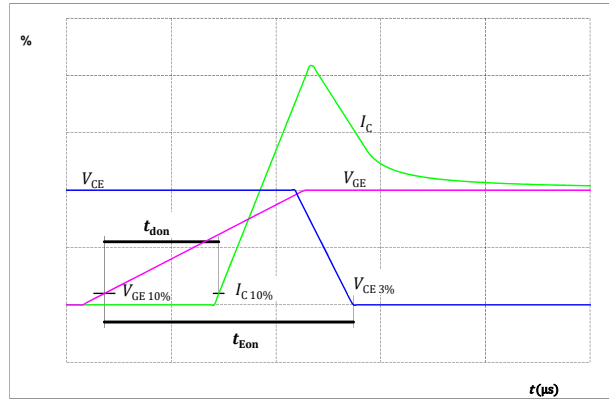


figure 56. IGBT

Turn-off Switching Waveforms & definition of  $t_f$


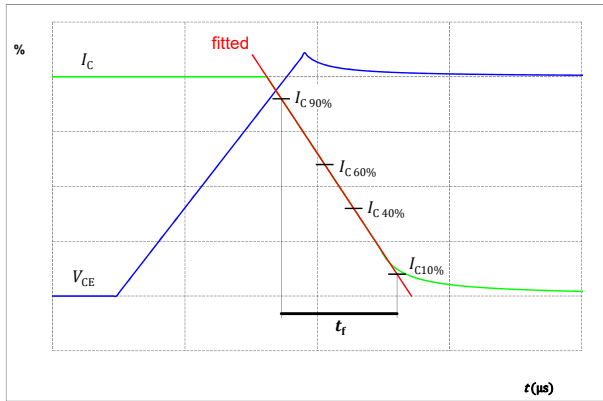


figure 57. IGBT

Turn-on Switching Waveforms & definition of  $t_r$



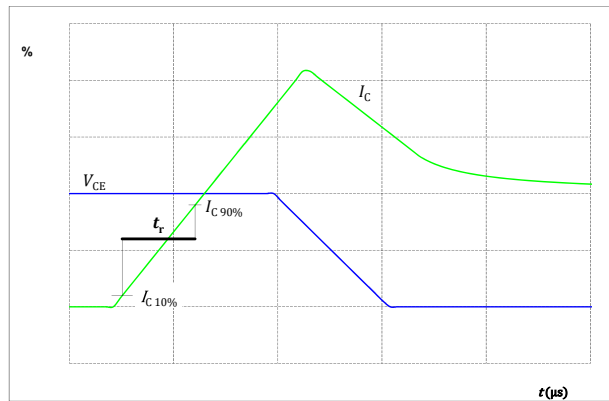

Vincotech

## Switching Definitions

figure 58.

FWD

Turn-off Switching Waveforms & definition of  $t_{rr}$


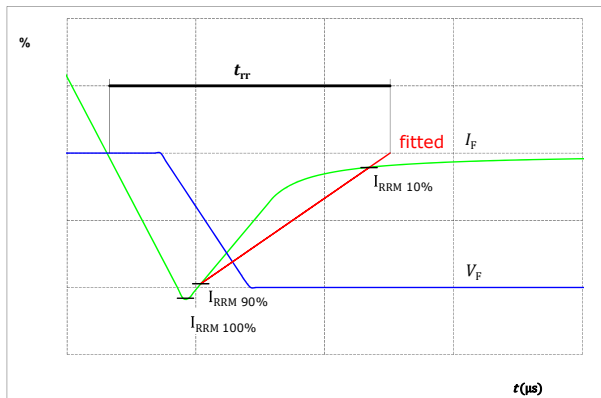


figure 59.

FWD

Turn-on Switching Waveforms & definition of  $t_{Qr}$  ( $t_{Qr}$  = integrating time for  $Q_r$ )



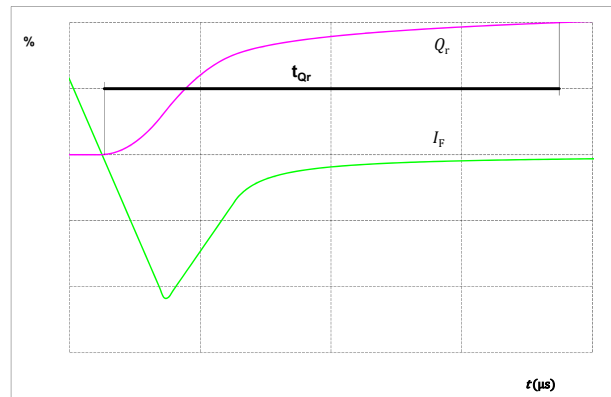


Vincotech


# 10-FY073AA050RG01-LK14L08

datasheet

| Ordering Code                            |                               |
|--|-------------------------------|
| Version                                  | Ordering Code                 |
| Without thermal paste                    | 10-FY073AA050RG01-LK14L08     |
| With thermal paste (5,2 W/mK, PTM6000HV) | 10-FY073AA050RG01-LK14L08-/7/ |
| With thermal paste (3,4 W/mK, PSX-P7)    | 10-FY073AA050RG01-LK14L08-/3/ |

| Marking   |          |                               |           |           |       |        |
|---|----------|-------------------------------|-----------|-----------|-------|--------|
|  | Text     | Name                          | Date code | UL & VIN  | Lot   | Serial |
|   |          | NN-NNNNNNNNNNNNNN-<br>TTTTTUV | WWYY      | UL VIN    | LLLLL | SSSS   |
| Datamatrix  | Type&Ver | Lot number                    | Serial    | Date code |       |        |
|   | TTTTTUV  | LLLLL                         | SSSS      | WWYY      |       |        |

| Outline        |       |       |          |  |
|----------------|-------|-------|----------|--|
| Pin table [mm] |       |       |          |  |
| Pin            | X     | Y     | Function |  |
| 1              | 52,9  | 0     | TM61     |  |
| 2              | 42,35 | 0     | Ph3      |  |
| 3              | 34,25 | 0     | TM51     |  |
| 4              | 23,7  | 0     | Ph2      |  |
| 5              | 15,7  | 0     | TM41     |  |
| 6              | 7,9   | 0     | Ph1      |  |
| 7              | 0     | 0     | Therm1   |  |
| 8              | 0     | 3     | Therm2   |  |
| 9              | 2     | 15,65 | DC-1     |  |
| 10             | 6,35  | 28,9  | G14      |  |
| 11             | 9,35  | 28,9  | G13      |  |
| 12             | 7,85  | 25,9  | S1       |  |
| 13             | 24,9  | 28,9  | G24      |  |
| 14             | 27,9  | 28,9  | G23      |  |
| 15             | 26,4  | 25,9  | S2       |  |
| 16             | 43,55 | 28,9  | G34      |  |
| 17             | 46,55 | 28,9  | G33      |  |
| 18             | 45,05 | 25,9  | S3       |  |
| 19             | 52,75 | 9,35  | DC+3     |  |
| 20             | 45,4  | 11,4  | GND3     |  |
| 21             | 39,2  | 15,65 | DC-3     |  |
| 22             | 34,1  | 9,35  | DC+2     |  |
| 23             | 26,75 | 11,4  | GND2     |  |
| 24             | 20,55 | 15,65 | DC-2     |  |
| 25             | 15,55 | 9,35  | DC+1     |  |
| 26             | 8,2   | 11,4  | GND1     |  |

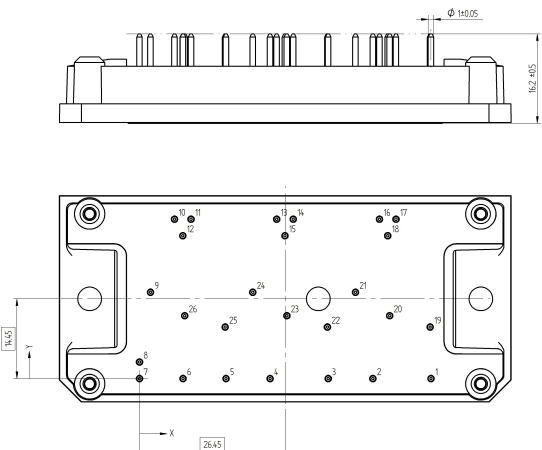


Tolerance of pinpositions: ±0.5mm at the end of pins  
Dimension of coordinate axis is only offset without tolerance



Vincotech

Pinout

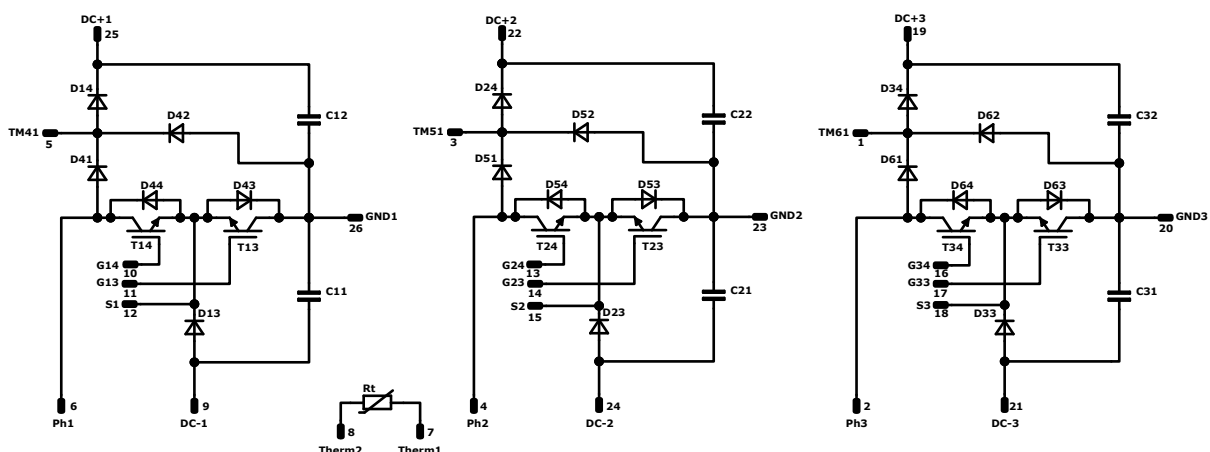


Identification

| ID                           | Component  | Voltage | Current | Function                              | Comment                   |
|------------------------------|------------|---------|---------|---------------------------------------|---------------------------|
| T13, T23, T33                | IGBT       | 650 V   | 50 A    | Negative Neutral Point Switch         |                           |
| T14, T24, T34                | IGBT       | 650 V   | 50 A    | Positive Neutral Point Switch         |                           |
| D13, D23, D33                | FWD        | 650 V   | 30 A    | Negative Boost Diode                  |                           |
| D14, D24, D34                | FWD        | 650 V   | 30 A    | Positive Boost Diode                  |                           |
| D43, D53, D63                | Rectifier  | 1600 V  | 20 A    | Negative Neutral Point Diode          |                           |
| D44, D54, D64                | Rectifier  | 1600 V  | 31 A    | Positive Neutral Point Diode          |                           |
| D42, D52, D62                | FWD        | 650 V   | 10 A    | Positive Boost Diode Protection Diode |                           |
| D41, D51, D61                | Rectifier  | 1600 V  | 20 A    | Positive Boost Blocking Diode         |                           |
| C11, C12, C21, C22, C31, C32 | Capacitor  | 500 V   |         | Capacitor (DC)                        |                           |
| Rt                           | Thermistor |         |         | Thermistor                            | TFT6GEF223F400 (Tateyama) |



Vincotech

10-FY073AA050RG01-LK14L08  
datasheet

| Packaging instruction   |      |          |      |   |
|---|------|----------|------|---|
| Standard packaging quantity (SPQ) 100   | >SPQ | Standard | <SPQ | Sample  |
| Handling instruction  |      |          |      |   |
| Handling instructions for <i>flow</i> 1 packages see vincotech.com website.   |      |          |      |   |
| Package data  |      |          |      |   |
| Package data for <i>flow</i> 1 packages see vincotech.com website.  |      |          |      |   |
| Vincotech thermistor reference  |      |          |      |   |
| See Vincotech thermistor reference table at vincotech.com website.  |      |          |      |   |
| UL recognition and file number  |      |          |      |   |
| This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. |      |          |      |  |

| Document No.:                   | Date:        | Modification:  | Pages |
|---------------------------------|--------------|--|-------|
| 10-FY073AA050RG01-LK14L08-D2-14 | 29 Nov. 2021 | Negative/Positive Boost Diode changed according to PCN-21-2021 |       |

#### DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

#### LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.