



Vincotech

# 10-EY122PA004ME-LU39F18T

datasheet

flowDUAL E2 SiC

1200 V / 4 mΩ

## Topology features

- Temperature sensor
- Half Bridge

## Component features

- Fast intrinsic diode with low reverse recovery
- High blocking voltage with low on-resistance
- High speed switching with low capacitance

## Housing features

- Base isolation: Al<sub>2</sub>O<sub>3</sub>
- Convex shaped substrate for superior thermal contact
- Compact housing
- CTI600 housing material
- Thermo-mechanical push-and-pull force relief
- Press-fit pin
- Reliable cold welding connection


## Target applications

- Charging Stations
- Energy Storage Systems
- General
- Industrial Drives
- Power Supply
- Servo Drives
- Solar Inverters
- UPS


## Types

- 10-EY122PA004ME-LU39F18T

## flow E2 12 mm housing



## Schematic

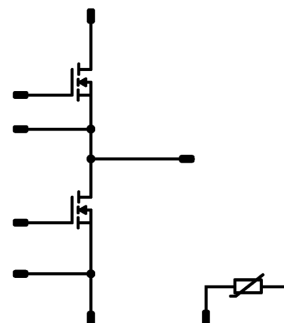



Vincotech

**10-EY122PA004ME-LU39F18T**  
datasheet

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>Inverter Switch</b>				
Drain-source voltage	$V_{DS}$		1200	V
Drain current (DC current)	$I_D$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	207	A
Peak drain current	$I_{DM}$	$t_p$ limited by $T_{jmax}$	912	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	350	W
Gate-source voltage	$V_{GSS}$	static	-4 / 15	V
		dynamic	-8 / 19	V
Maximum Junction Temperature	$T_{jmax}$		175	°C

## Module Properties

### Thermal Properties

Storage temperature	$T_{stg}$		-40...+125	°C
Operation temperature under switching condition	$T_{jop}$		-40...+( $T_{jmax} - 25$ )	°C

### Isolation Properties

Isolation voltage	$V_{isol}$	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Creepage distance			>12,7	mm
Clearance			9,34	mm
Comparative Tracking Index	CTI		≥ 600	

\*100 % tested in production



Vincotech

# 10-EY122PA004ME-LU39F18T

datasheet

## Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max		

### Inverter Switch

#### Static

Drain-source on-state resistance	$r_{DS(on)}$		15		228	25 125 150	3,03	4,86 6,86 7,78	5,63 <sup>(1)</sup>	mΩ
Gate-source threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$			0,0642	25	1,8	2,7	3,6	V
Gate to Source Leakage Current	$I_{GSS}$		15	0		25		60	1500	nA
Zero Gate Voltage Drain Current	$I_{DSS}$		0	1200		25		6	300	μA
Internal gate resistance	$r_g$							0,683		Ω
Gate charge	$Q_g$		-4/15	800	228	25		816		nC
Short-circuit input capacitance	$C_{iss}$	$f = 100 \text{ kHz}$	0	1000	0	25		20820		pF
Short-circuit output capacitance	$C_{oss}$							660		
Reverse transfer capacitance	$C_{rss}$							54		
Diode forward voltage	$V_{SD}$		0		117	25		4,8		V

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 5,2 \text{ W/mK}$ (PTM)						0,27		K/W
--	---------------	---	--	--	--	--	--	------	--	-----



Vincotech

# 10-EY122PA004ME-LU39F18T

datasheet

## Characteristic Values

Parameter	Symbol	Conditions					Values			Unit				
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max					
Dynamic														
Turn-on delay time	$t_{d(on)}$	$R_{gon} = 0,5 \Omega$ $R_{goff} = 0,5 \Omega$	-4/15	600	192	25		26,92		ns				
						125		25,73						
						150		25,92						
Rise time	$t_r$					25		8,95			ns			
						125		8,5						
						150		8,31						
Turn-off delay time	$t_{d(off)}$					25		57,51			ns			
						125		60,98						
						150		62,12						
Fall time	$t_f$					25		13,18			ns			
						125		14,96						
						150		15,12						
Turn-on energy (per pulse)	$E_{on}$	$Q_{rFWD}=2,83 \mu C$ $Q_{rFWD}=4,17 \mu C$ $Q_{rFWD}=5,01 \mu C$	-4/15	600	192	25		0,845		mWs				
						125		0,821						
						150		0,836						
Turn-off energy (per pulse)	$E_{off}$					25		0,692			mWs			
						125		0,715						
						150		0,748						
Peak recovery current	$I_{RRM}$	$di/dt=30165 A/\mu s$ $di/dt=32560 A/\mu s$ $di/dt=28098 A/\mu s$				-4/15	600	192	25		243,77		A	
									125		288,13			
									150		318,7			
Reverse recovery time	$t_{rr}$								25		21,25			ns
									125		23,92			
									150		26,02			
Recovered charge	$Q_r$		25		2,83						$\mu C$			
			125		4,17									
			150		5,01									
Reverse recovered energy	$E_{rec}$		25		2,55						mWs			
			125		3,52									
			150		4,39									
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$	25		27663,4			A/ $\mu s$							
		125		27847,09										
		150		28541										



Vincotech

**10-EY122PA004ME-LU39F18T**  
datasheet

**Characteristic Values**

Parameter	Symbol	Conditions					Values			Unit
			$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max	

**Thermistor**

**Static**

Rated resistance	$R$					25		5		k $\Omega$
Deviation of R100	$\Delta_{R/R}$	$R_{100} = 499 \Omega$				100	3,2		3,3	%
Power dissipation	$P$					25		130		mW
Power dissipation constant	$d$					25		1,3		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 1 \%$						3380		K
Vincotech Thermistor Reference									V	

<sup>(1)</sup> Value at chip level

<sup>(2)</sup> Only valid with pre-applied Vincotech thermal interface material.




Vincotech

## Inverter Switch Characteristics

figure 1. MOSFET

Typical output characteristics

$$I_D = f(V_{DS})$$

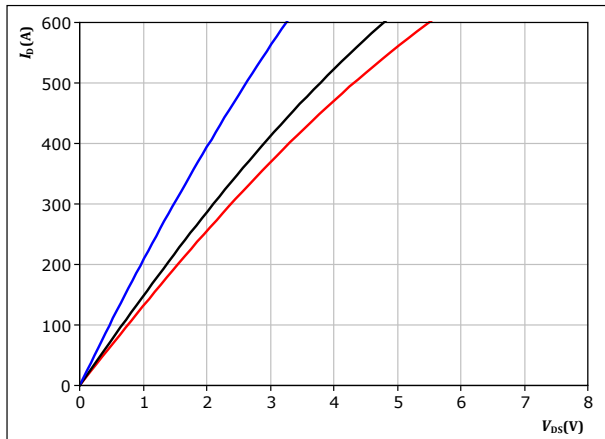


$t_p = 250 \mu s$   
 $V_{GS} = 15 V$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 2. MOSFET

Typical output characteristics

$$I_D = f(V_{DS})$$

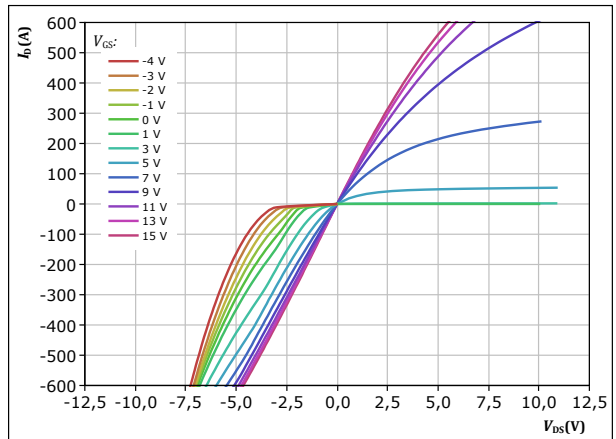


$t_p = 250 \mu s$   
 $T_j = 150 ^\circ C$   
 $V_{GS}$  from -4 V to 15 V in steps of 1 V

figure 3. MOSFET

Typical transfer characteristics

$$I_D = f(V_{GS})$$

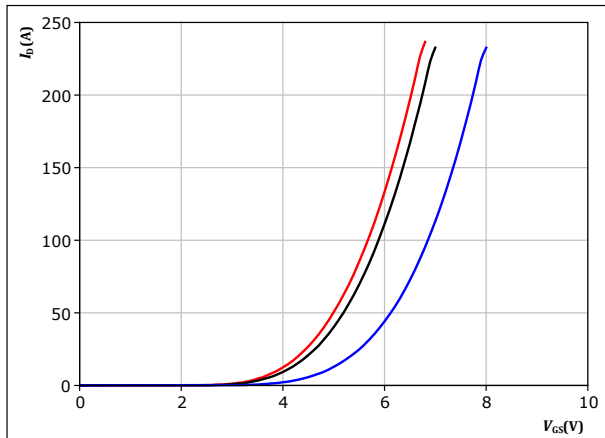


$t_p = 250 \mu s$   
 $V_{DS} = 10 V$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C

figure 4. MOSFET

Typical reverse drain current characteristics

$$I_{SD} = f(V_{SD})$$

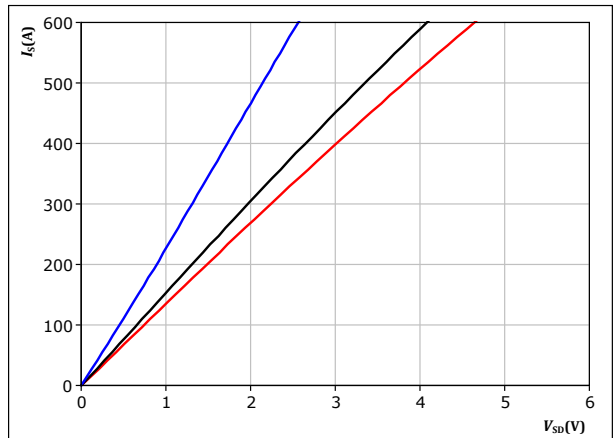

$t_p = 250 \mu s$   
 $V_{GS} = 15 V$

$T_j$ :  
— 25 °C  
— 125 °C  
— 150 °C




Vincotech

## Inverter Switch Characteristics

figure 5. MOSFET

Transient thermal impedance as a function of pulse width

$$Z_{th(j-a)} = f(t_p)$$

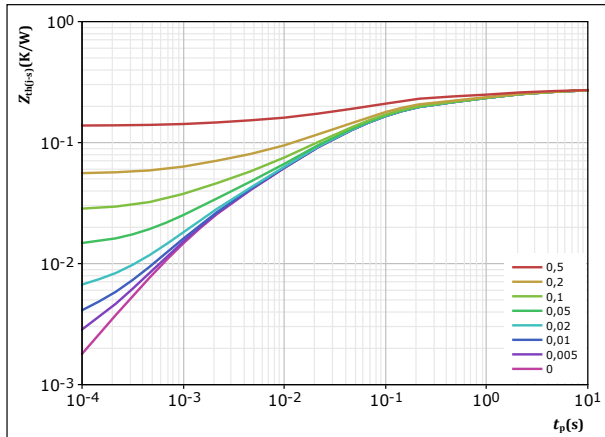

$$D = t_p / T$$

$$R_{th(j-a)} = 0,272 \text{ K/W}$$


MOSFET thermal model values

R (K/W)	$\tau$ (s)
2,94E-02	5,70E+00
5,74E-02	8,34E-01
1,22E-01	7,29E-02
4,96E-02	1,24E-02
1,80E-02	1,42E-03

figure 7. MOSFET

Gate voltage vs gate charge

$$V_{GS} = f(Q_g)$$

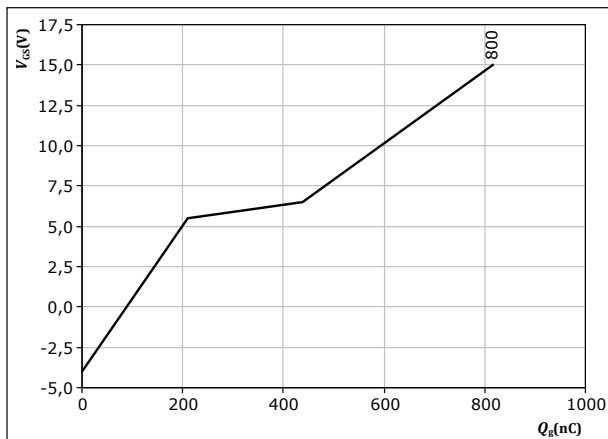


$$I_D = 228 \text{ A}$$

$$T_j = 25 \text{ }^{\circ}\text{C}$$

figure 6. MOSFET

Safe operating area

$$I_D = f(V_{DS})$$

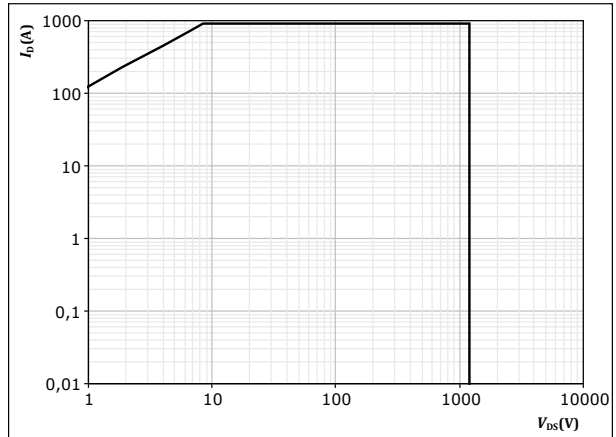

D = single pulse

$$T_s = 80 \text{ }^{\circ}\text{C}$$

$$V_{GS} = 15 \text{ V}$$

$$T_j = T_{jmax}$$



Vincotech


## Thermistor Characteristics

figure 8.

Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

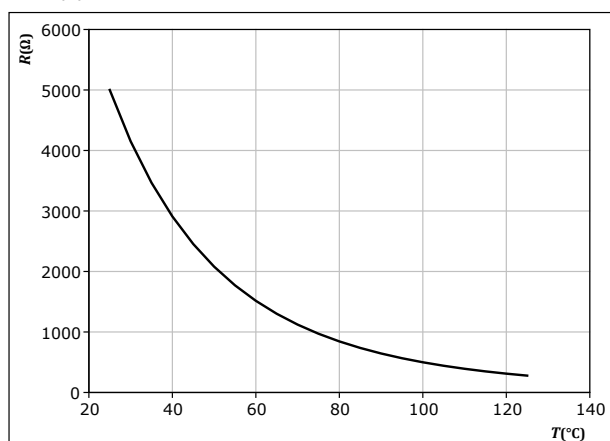





Vincotech

10-EY122PA004ME-LU39F18T  
datasheet


## Inverter Switching Characteristics

figure 9.

MOSFET

Typical switching energy losses as a function of drain current

$$E = f(I_D)$$

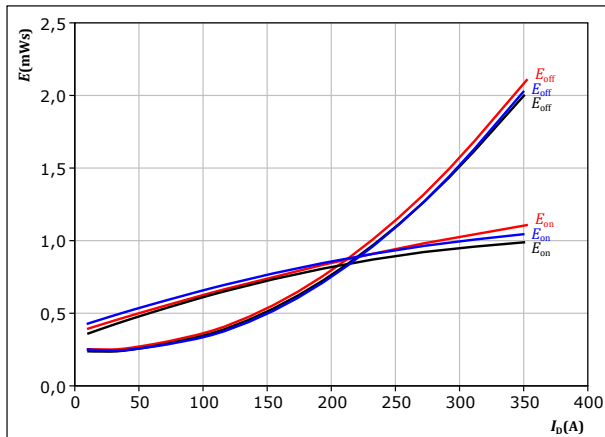

With an inductive load at

$V_{DS} = 600 \text{ V}$   
 $V_{GS} = -4/15 \text{ V}$   
 $R_{gon} = 0,5 \text{ } \Omega$   
 $R_{goff} = 0,5 \text{ } \Omega$


$T_j$ : 25 °C  
125 °C  
150 °C

figure 11.

MOSFET

Typical reverse recovered energy loss as a function of drain current

$$E_{rec} = f(I_D)$$

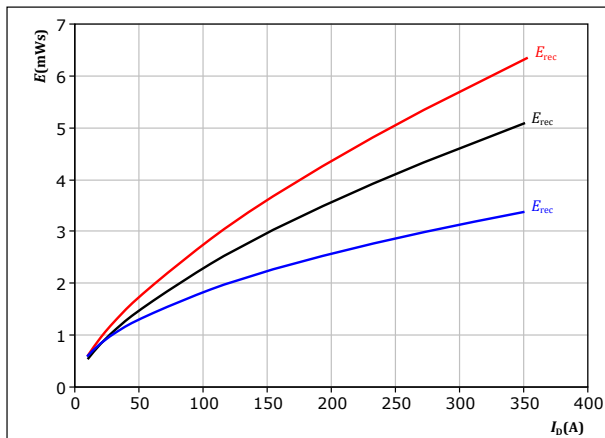

With an inductive load at

$V_{DS} = 600 \text{ V}$   
 $V_{GS} = -4/15 \text{ V}$   
 $R_{gon} = 0,5 \text{ } \Omega$


$T_j$ : 25 °C  
125 °C  
150 °C

figure 10.

MOSFET

Typical switching energy losses as a function of MOSFET turn on gate resistor

$$E = f(R_g)$$

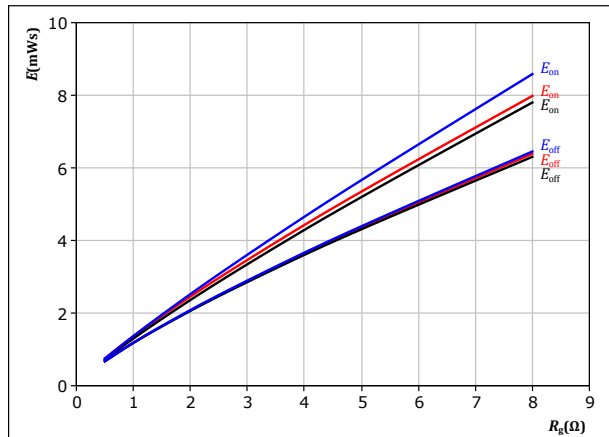

With an inductive load at

$V_{DS} = 600 \text{ V}$   
 $V_{GS} = -4/15 \text{ V}$   
 $I_D = 192 \text{ A}$


$T_j$ : 25 °C  
125 °C  
150 °C

figure 12.

MOSFET

Typical reverse recovered energy loss as a function of MOSFET turn on gate resistor

$$E_{rec} = f(R_g)$$

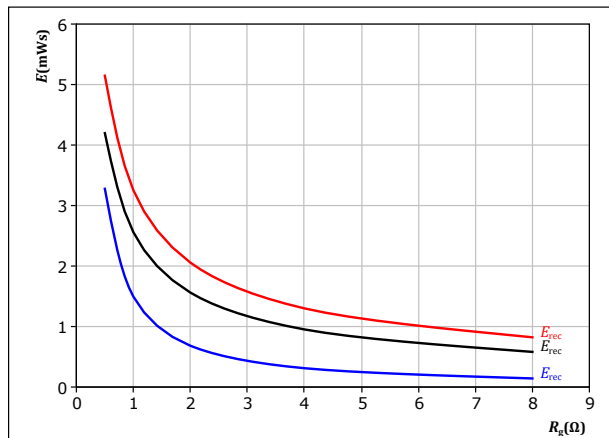

With an inductive load at

$V_{DS} = 600 \text{ V}$   
 $V_{GS} = -4/15 \text{ V}$   
 $I_D = 192 \text{ A}$

$T_j$ : 25 °C  
125 °C  
150 °C



Vincotech


# 10-EY122PA004ME-LU39F18T datasheet

## Inverter Switching Characteristics

figure 13.

MOSFET

Typical switching times as a function of drain current  
 $t = f(I_D)$

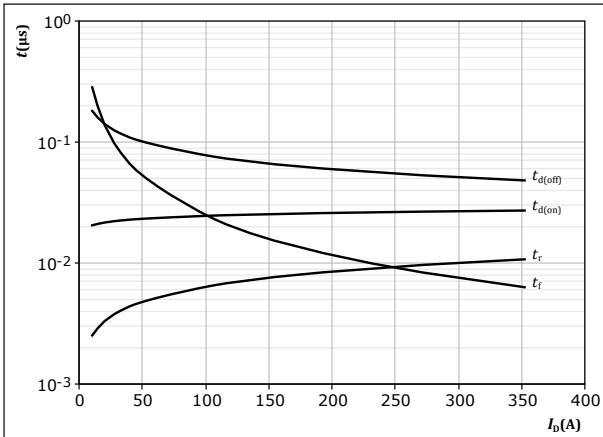


With an inductive load at

$T_j = 150$  °C  
 $V_{DS} = 600$  V  
 $V_{GS} = -4/15$  V  
 $R_{gon} = 0,5$  Ω  
 $R_{goff} = 0,5$  Ω

figure 14.

MOSFET

Typical switching times as a function of MOSFET turn on gate resistor  
 $t = f(R_g)$

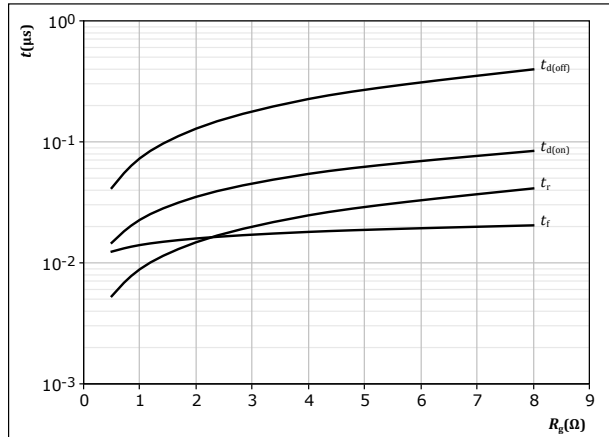


With an inductive load at

$T_j = 150$  °C  
 $V_{DS} = 600$  V  
 $V_{GS} = -4/15$  V  
 $I_D = 192$  A

figure 15.

MOSFET

Typical reverse recovery time as a function of drain current  
 $t_{rr} = f(I_D)$

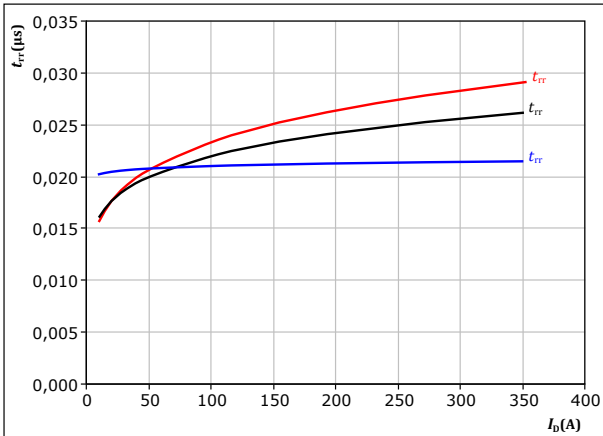


At  $V_{DS} = 600$  V  
 $V_{GS} = -4/15$  V  
 $R_{gon} = 0,5$  Ω  
 $T_j: 25$  °C (blue)  
 $125$  °C (black)  
 $150$  °C (red)

figure 16.

MOSFET

Typical reverse recovery time as a function of MOSFET turn on gate resistor  
 $t_{rr} = f(R_{gon})$

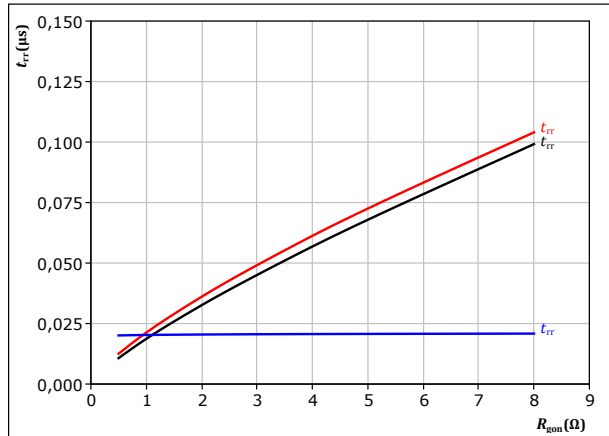

At  $V_{DS} = 600$  V  
 $V_{GS} = -4/15$  V  
 $I_D = 192$  A  
 $T_j: 25$  °C (blue)  
 $125$  °C (black)  
 $150$  °C (red)




Vincotech

## Inverter Switching Characteristics

figure 17. MOSFET

Typical recovered charge as a function of drain current

$$Q_r = f(I_D)$$

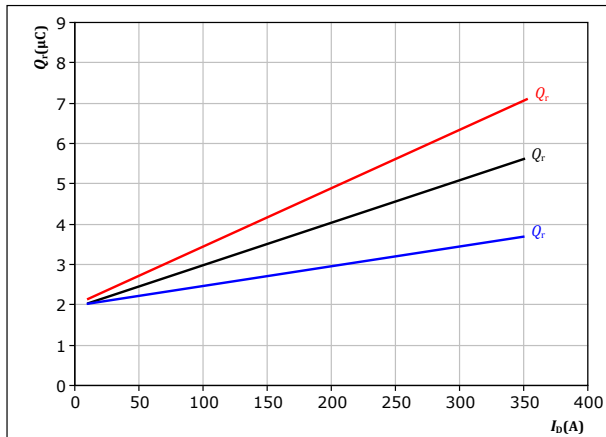


At  $V_{DS} = 600$  V  
 $V_{GS} = -4/15$  V  
 $R_{gon} = 0,5$   $\Omega$   
 $T_j$ : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 18. MOSFET

Typical recovered charge as a function of MOSFET turn on gate resistor

$$Q_r = f(R_{gon})$$

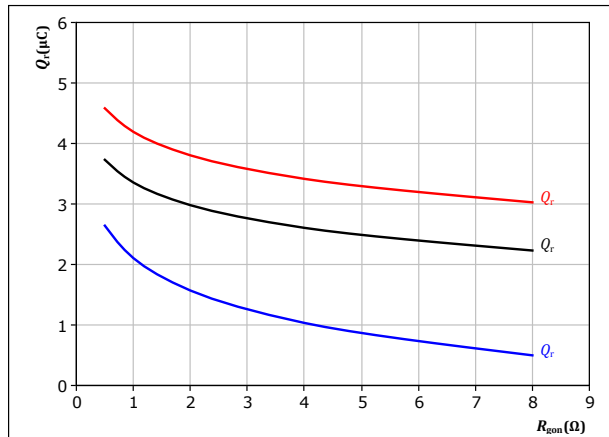


At  $V_{DS} = 600$  V  
 $V_{GS} = -4/15$  V  
 $I_D = 192$  A  
 $T_j$ : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 19. MOSFET

Typical peak reverse recovery current as a function of drain current

$$I_{RM} = f(I_D)$$

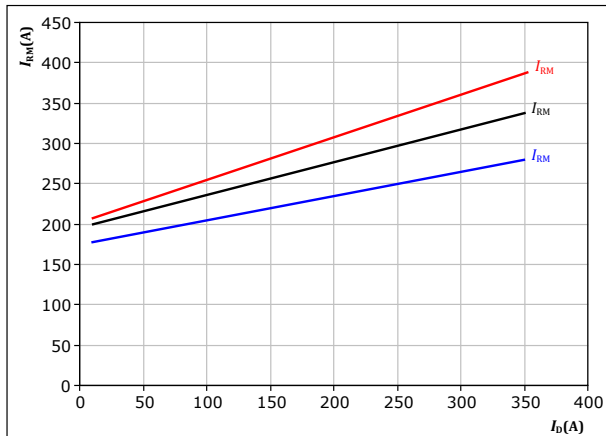


At  $V_{DS} = 600$  V  
 $V_{GS} = -4/15$  V  
 $R_{gon} = 0,5$   $\Omega$   
 $T_j$ : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 20. MOSFET

Typical peak reverse recovery current as a function of MOSFET turn on gate resistor

$$I_{RM} = f(R_{gon})$$

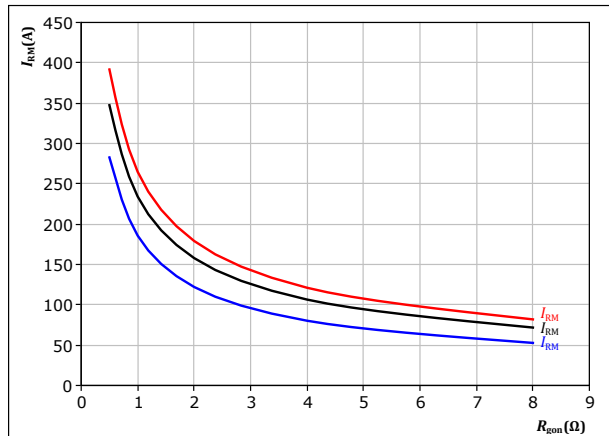

At  $V_{DS} = 600$  V  
 $V_{GS} = -4/15$  V  
 $I_D = 192$  A  
 $T_j$ : 25 °C (blue), 125 °C (black), 150 °C (red)




Vincotech

## Inverter Switching Characteristics

figure 21. MOSFET


Typical rate of fall of forward and reverse recovery current as a function of drain current  
 $di_f/dt, di_r/dt = f(I_D)$

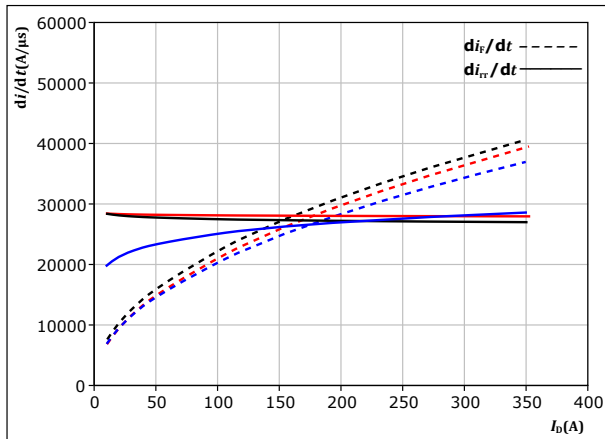

At  $V_{DS} = 600$  V  
 $V_{GS} = -4/15$  V  
 $R_{gon} = 0,5$   $\Omega$   
 $T_j = 25$  °C  
 $125$  °C  
 $150$  °C

figure 22. MOSFET


Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor  
 $di_f/dt, di_r/dt = f(R_{gon})$

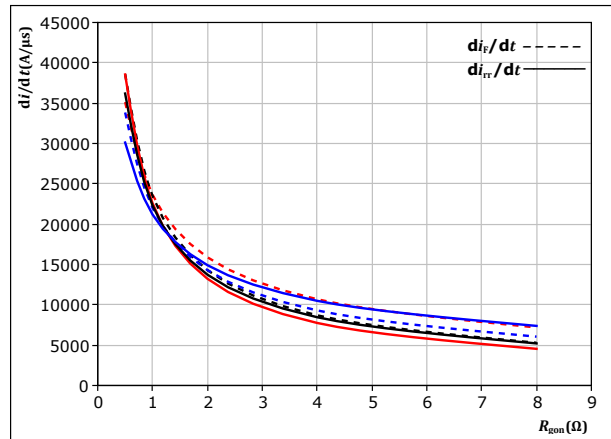

At  $V_{DS} = 600$  V  
 $V_{GS} = -4/15$  V  
 $I_D = 192$  A  
 $T_j = 25$  °C  
 $125$  °C  
 $150$  °C

figure 23. MOSFET

Reverse bias safe operating area  
 $I_D = f(V_{DS})$

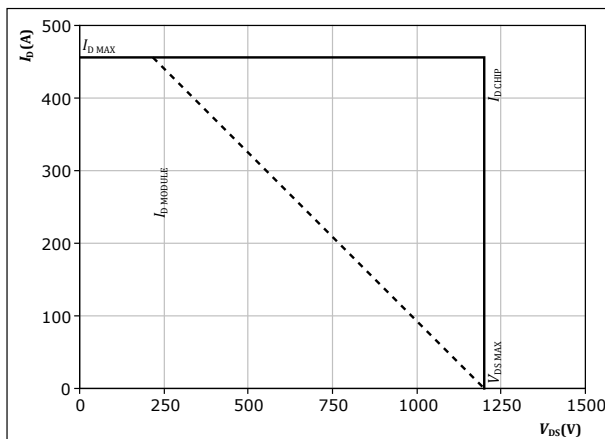

At  $T_j = 150$  °C  
 $R_{gon} = 0,5$   $\Omega$   
 $R_{goff} = 0,5$   $\Omega$



Vincotech

## Inverter Switching Definitions

figure 24. MOSFET

Turn-off Switching Waveforms & definition of  $t_{doff}$   $t_{Eoff}$  ( $t_{Eoff}$  = integrating time for  $E_{off}$ )

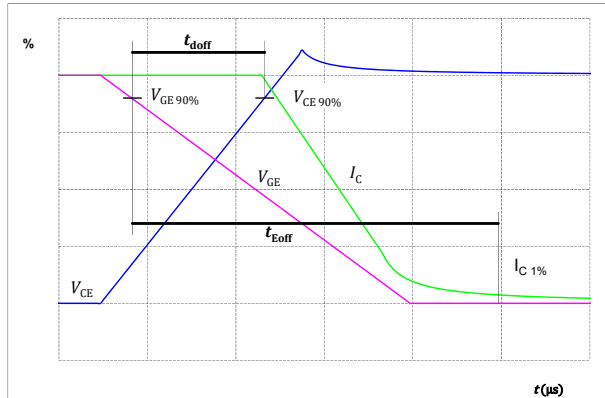


figure 25. MOSFET

Turn-on Switching Waveforms & definition of  $t_{don}$   $t_{Eon}$  ( $t_{Eon}$  = integrating time for  $E_{on}$ )

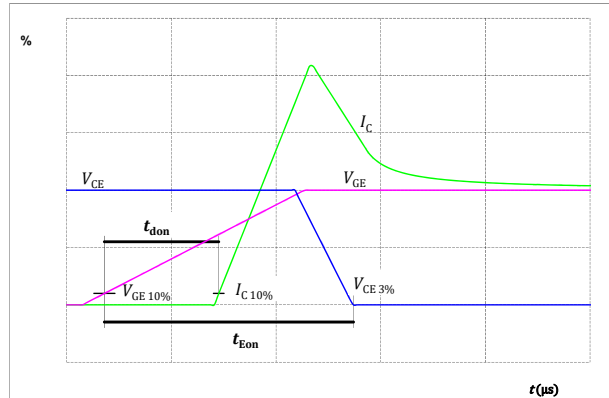


figure 26. MOSFET

Turn-off Switching Waveforms & definition of  $t_f$


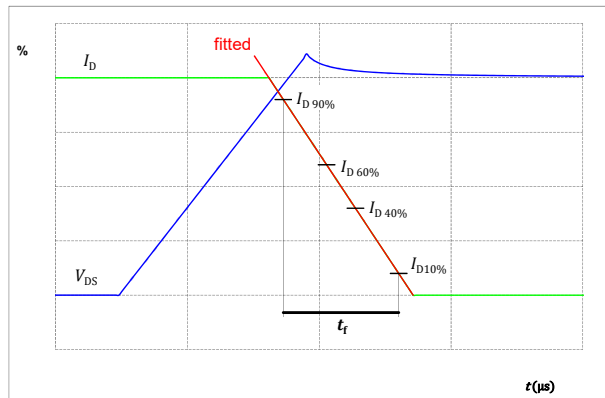


figure 27. MOSFET

Turn-on Switching Waveforms & definition of  $t_r$



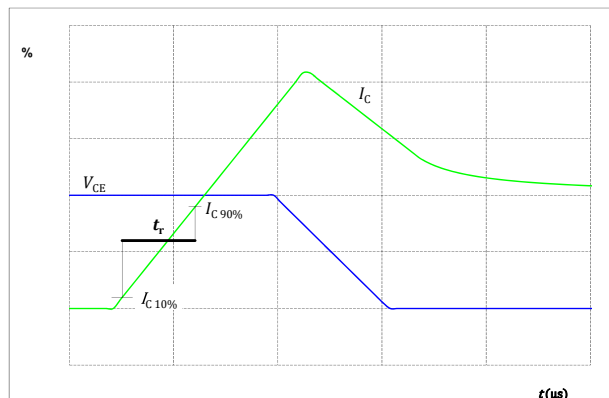

Vincotech

## Inverter Switching Definitions

figure 28. FWD

Turn-off Switching Waveforms & definition of  $t_{tr}$

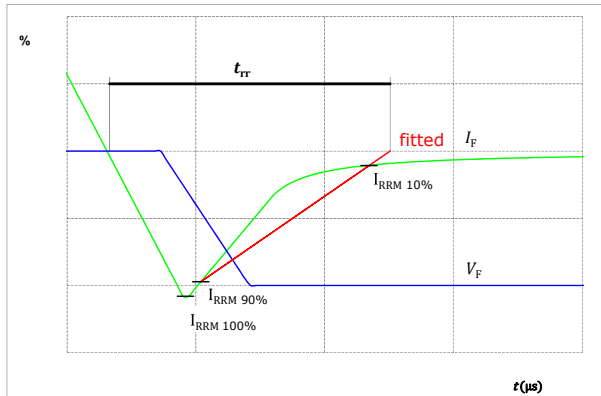


figure 29. FWD

Turn-on Switching Waveforms & definition of  $t_{Qr}$  ( $t_{Qr}$  = integrating time for  $Q_r$ )


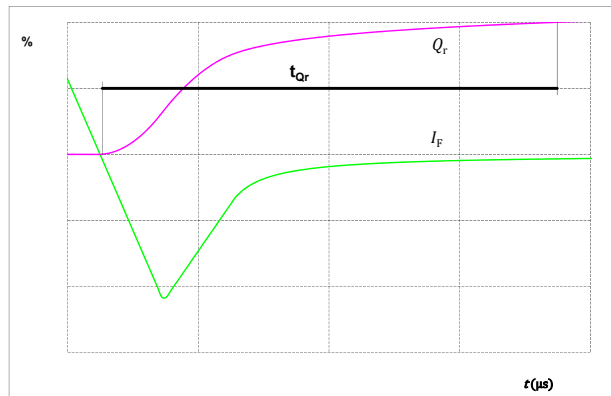


figure 30. FWD



Turn-on Switching Waveforms & definition of  $t_{Erec}$  ( $t_{Erec}$  = integrating time for  $E_{rec}$ )



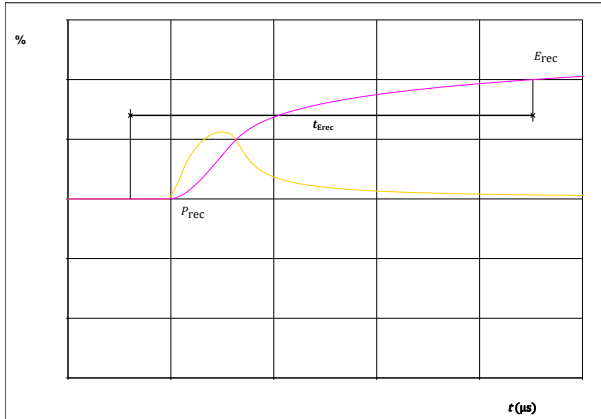

# Vincotech

Ordering Code	
Version	Ordering Code
Without thermal paste	10-EY122PA004ME-LU39F18T
With thermal paste (5,2 W/mK, PTM6000HV)	10-EY122PA004ME-LU39F18T-/7/


Marking							
	Text	Name		Date code	UL & VIN	Lot	Serial
		NN-NNNNNNNNNNNNNN- TTTTTTVV		WWYY	UL VIN	LLLL	SSSS
		Datamatrix	Type&Ver	Lot number	Serial	Date code	
TTTTTTVV			LLLL	SSSS	WWYY		

Pin table [mm]			
Pin	X	Y	Function
1	25,6	48	Ph1
2	28,8	48	Ph1
3	32	48	Ph1
4	28,8	44,8	Ph1
5	32	44,8	Ph1
6	28,8	35,2	S11
7	32	35,2	G11
8	32	28,8	Therm1
9	32	25,6	Therm2
10	28,8	12,8	S11
11	32	12,8	G11
12	28,8	3,2	Ph1
13	32	3,2	Ph1
14	32	0	Ph1
15	28,8	0	Ph1
16	25,6	0	Ph1
17	19,2	6,4	DC-
18	16	9,6	DC-
19	16	16	DC-
20	16	19,2	DC-
21	19,2	19,2	DC-
22	16	28,8	DC-
23	19,2	28,8	DC-
24	19,2	41,6	DC-
25	12,8	48	DC+
26	9,6	48	DC+
27	6,4	35,2	DC+
28	3,2	35,2	DC+
29	6,4	12,8	DC+
30	3,2	12,8	DC+
31	12,8	0	DC+
32	9,6	0	DC+
33	0	0	S12
34	0	3,2	G12
35	0	44,8	G12
36	0	48	S12



Vincotech

**10-EY122PA004ME-LU39F18T**  
datasheet

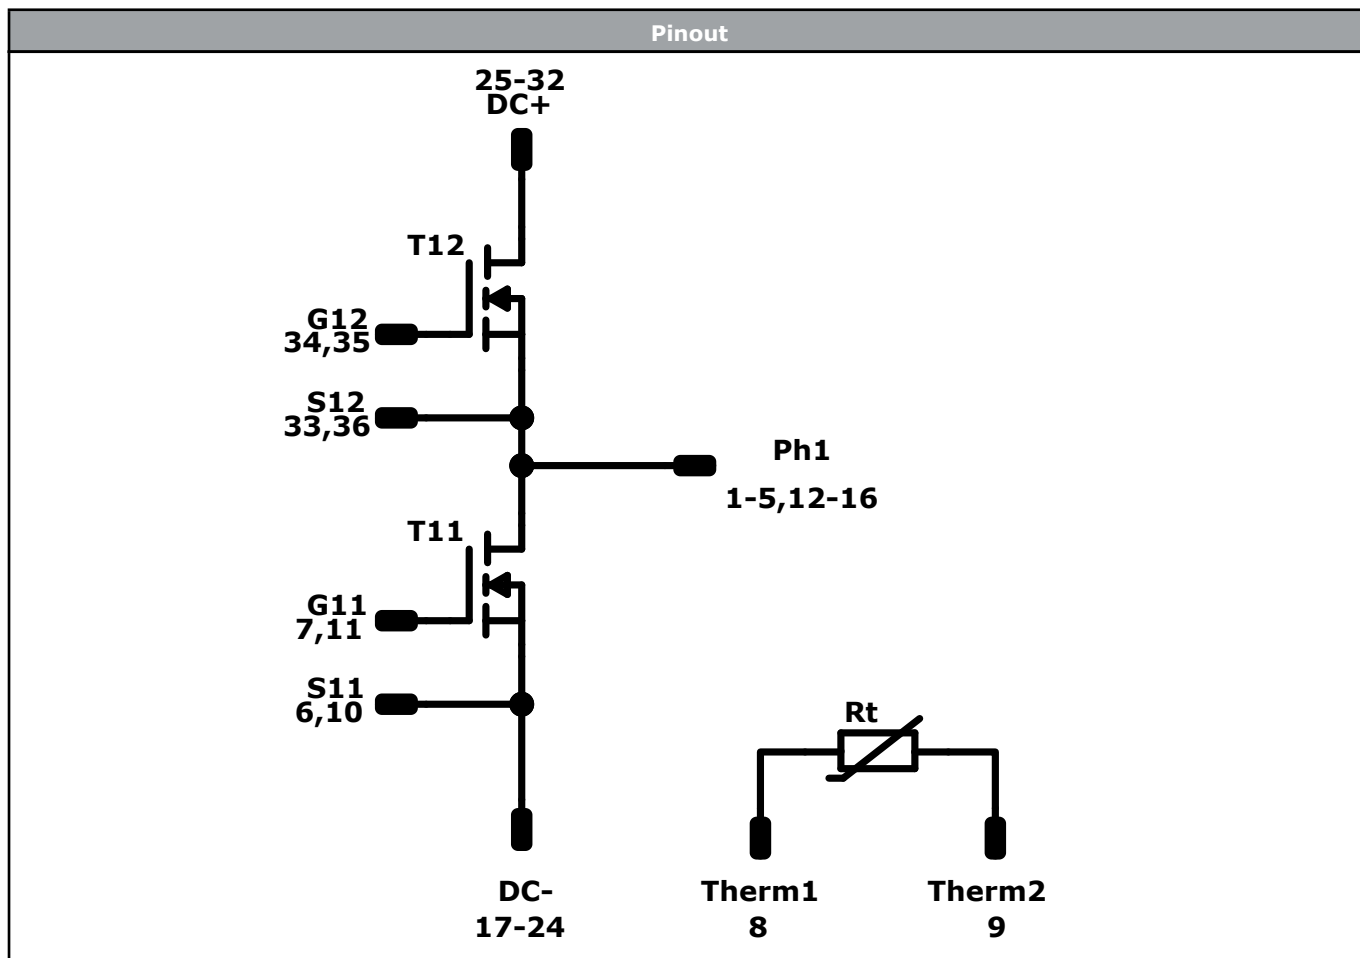

Identification					
ID	Component	Voltage	Current	Function	Comment
T11, T12	MOSFET	1200 V	4,33 mΩ	Inverter Switch	
Rt	Thermistor			Thermistor	





Vincotech

**10-EY122PA004ME-LU39F18T**  
datasheet

Packaging instruction				
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ	Sample

Handling instruction
Handling instructions for <i>flow</i> E2 packages see vincotech.com website.

Package data
Package data for <i>flow</i> E2 packages see vincotech.com website.

Vincotech thermistor reference
See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number
This device is UL 1557 recognized under E192116 up to a junction temperature under switching condition $T_{j,sp}=175^{\circ}\text{C}$ and up to 4000VAC/1min isolation voltage. For more information see vincotech.com website.



Document No.:	Date:	Modification:	Pages
10-EY122PA004ME-LU39F18T-D1-14	30 Apr. 2026	Initial Release	

**DISCLAIMER**

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

**LIFE SUPPORT POLICY**

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.